


100  SINGLE TRACK OPTION  
 Tram Tracks

100  DUAL TRACK OPTION  
 Tram Tracks

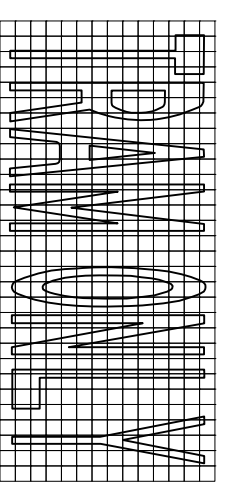

Note:- Tram Only pavement messages are placed along tram alignment corridors to deter other vehicles and road users from entering these corridors.  
 Tram Only pavement messages must be placed on tram alignment corridors on both the approach and exit sides of a tram alignment corridor which intersects any road.  
 Where placed, Tram Only pavement messages must be placed inside each pair of rails within the corridor and oriented to be read from top to bottom.

**ACCEPTED FOR CONSTRUCTION**

OR CODE	Scan to Check	REVISION	DATE	AMENDMENT / REVISION DESCRIPTION	APPROVAL	DRAWING FILE LOCATION / NAME
01	01	23-09-18	AS Forms & material designation revised	P. Oliver	H:\SIGN\TTT\DRAWINGS\PL\CTO\delineation\Tram Only Pavement Marking.DWG	
ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SPECIFIED			SIGN TO BE MANUFACTURED IN ACCORDANCE WITH RMS QA SPECIFICATION 3400			

DESIGNED	SIGNED: M. Davies	DATE: 31-07-19
REVIEWED	SIGNED: J. Rozdos	DATE: 31-07-19
VERIFIED	SIGNED: P. Oliver	DATE: 31-07-19
TITLE	Manager, Guidance & Delineation	

PREPARED BY  
**NSW** Government  
 Transport  
 Roads & Maritime  
 Services

DELINEATION  
**Tram Only Pavement Marking**  
 Single & Dual Light Rail Tracks

SCALE: 1:50

SHEET 1 OF 1

EDMS No. XXXXXXXXXX

SHEET No. 1

ISSUE 01

© Roads and Maritime Services