

Reference material

Advanced train control Migration System (AMS) Specifications – Geographic data for AMS

This document is published as reference material to support the implementation of Automatic Train Protection as part of the roll out of the Advanced Train Control Migration System project.

The content described might be of assistance to individuals and organisations performing work on Transport for NSW Rail Assets.

When reading this document, any inconsistencies with Transport for NSW Network Standards shall be raised with the Asset Standards Authority (ASA) for clarification.

This document does not comply with accessibility requirements (WCAG 2.0). If you are having trouble accessing information in these documents, please contact the [ASA](#).

Authorised by: Chief Engineer, Asset Standards Authority
Published: December 2017

Important message

This document is developed solely and specifically for use on the rail network owned or managed by the NSW Government and its agencies. It is not suitable for any other purpose. You must not use or adapt it or rely upon it in any way unless you are authorised in writing to do so by a relevant NSW Government agency.

If this document forms part of a contract with, or is a condition of approval by, a NSW Government agency, use of the document is subject to the terms of the contract or approval.

This document is published for information only and its content may not be current.

AMS PROJECT SPECIFICATIONS







GEOGRAPHIC DATA FOR AMS

DeskSite Reference: 2741164

Guideline – Applicable to Implementation of AMS – ATP Project

Status:	Issued for Approval
Version:	1.3
Branch:	Infrastructure & Services
Business unit:	ATP Program
Date of issue:	16/5/2017
Review date:	N/A
Audience:	AMS designer, installer and project delivery
Asset classes:	<input checked="" type="checkbox"/> Heavy Rail; <input type="checkbox"/> Light Rail; <input checked="" type="checkbox"/> Multi Sites; <input checked="" type="checkbox"/> Systems; <input type="checkbox"/> Fleets
Project type:	Major
Project lifecycle:	<input type="checkbox"/> Feasibility; <input checked="" type="checkbox"/> Scoping; <input type="checkbox"/> Definition; <input checked="" type="checkbox"/> Construction readiness; <input checked="" type="checkbox"/> Implementation; <input checked="" type="checkbox"/> Finalisation; <input type="checkbox"/> Not applicable
Process owner:	Project Director

Document Approval

Authored by: Subrina Rahman Design Engineer I&S, ATP Project		17/5/17 Date:
Reviewed by: Paul Hartley Senior Rail Systems Manager I&S, ATP Project		17-5-17 Date:
Reviewed by: Michael Little Manager Safety Assurance I&S, ATP Project		17-5-2017 Date:
Reviewed by: Nicholas Herb Manager Operational Integration I&S, ATP Project		17.5.2017 Date:
Reviewed and Accepted by: Frederic Tricoche Principal Engineering Manager Systems I&S, ATP Project		18/05/17 Date:
Approved for Release by: Craig Southward ATP Project Director I&S, ATP Project		27/5/17 Date:

Reference material only

AMS PROJECT SPECIFICATIONS

GEOGRAPHIC DATA FOR AMS

DeskSite Reference: 2741164

Guideline – Applicable to Implementation of AMS – ATP Project

Status:	Issued for Approval
Version:	1.3
Branch:	Infrastructure & Services
Business unit:	ATP Program
Date of issue:	16/5/2017
Review date:	N/A
Audience:	AMS designer, installer and project delivery
Asset classes:	<input checked="" type="checkbox"/> Heavy Rail; <input type="checkbox"/> Light Rail; <input checked="" type="checkbox"/> Multi Sites; <input checked="" type="checkbox"/> Systems; <input type="checkbox"/> Fleets
Project type:	Major
Project lifecycle:	<input type="checkbox"/> Feasibility; <input checked="" type="checkbox"/> Scoping; <input type="checkbox"/> Definition; <input checked="" type="checkbox"/> Construction readiness; <input checked="" type="checkbox"/> Implementation; <input checked="" type="checkbox"/> Finalisation; <input type="checkbox"/> Not applicable
Process owner:	Project Director

Document History

Version	Date of Issue	Author	Summary of change
0.1	30/03/2016	S. Rahman	Initial draft
0.2	07/06/2016	S. Rahman	Updated after internal review as per DRS [DeskSite: 5082571]
0.3	28/07/2016	S. Rahman	Updated after internal review as per DRS [DeskSite: 5082571]
0.4	26/9/2016	S. Rahman	Updated after internal review as per DRS [DeskSite: 5082571]
0.5	12/10/2016	S. Rahman	Updated after internal review as per DRS [DeskSite: 5082571] and issued to Sydney Trains for comments
0.6	04/11/2016	S. Rahman	Updated after internal review as per DRS [DeskSite: 5082571]
0.7	12/12/2016	S. Rahman	Updated after internal review as per DRS [DeskSite: 5082571] and issued for internal review only
0.8	23/12/2016	S. Rahman	Minor changes to correct/clarify wording throughout document. Major inclusion/change to section 6.4 – use of OHWS and section 7.3 measurement procedure
1.0	27/01/2017	S. Rahman	Issued for approval
1.1	9/5/2017	S. Rahman	Changed as per CR 453, 481 & 574
1.2	12/5/2017	S. Rahman	Changes as per internal review of v1.1
1.3	16/5/2017	S. Rahman	Changes as per internal review of v1.2

Reference material only

Foreword

This guideline forms a part of AMS Project Specifications which detail the requirements for the implementation of AMS on the TfNSW heavy rail network.

This guideline specifically covers the sources and use of Geographic Data required as part of AMS Trackside implementation.

To gain a complete overview of ATP / AMS signalling design requirements, this document should be read in conjunction with the AMS suite of signalling design principle and guideline modules.

Note

The following guideline is to be used by AEO's engaged by the ATP program for the implementation of AMS only. This is to ensure that a consistent methodology is applied.

It has been produced during the development of the AMS Project Specifications and subsequent further development of this guideline may be required as the specifications evolve.

It is an interim document until the ASA Guideline is published.

Table of Contents

Document Approval	2
Document History	3
1 Introduction	6
2 Purpose	8
2.1 Scope	8
2.2 Application	8
3 Reference documents	9
4 Terms and definitions	10
5 Overview of Use of Geographic Data	12
5.1 Input Source for Location Data	14
5.2 Input Source for Gradient Data	18
6 Use of Site Certification Form	19
6.1 Identifying Balise Position and Locations for Verification	23
6.2 Balise Installation and Site Validation	24
6.3 Site Verification of Geographic Location Data	25
6.4 Acceptable Reference Assets	26
7 Site Measurement Process	27
7.1 Measurement Points	27
7.2 Measurement Tools	35
7.3 Measurement Procedure	35
8 AMS Change Management Workgroup	37
9 Record of Geographic Data for Maintenance	38
Appendix A. Site Certification Form	40
Appendix B. Reference Assets and Target Locations for Different AMS Functions	42
Appendix C. RFI for GIS Extract	56

Reference material only

1 Introduction

Transport for New South Wales (TfNSW) is using the European Train Control System (ETCS) to provide Automatic Train Protection (ATP) functionality on the TfNSW heavy rail network.

In ETCS, trackside equipment transmits data (geographic data, speed limits, signalled proceed authorities, and other related data) to on-board equipment. The on-board equipment uses this information and pre-programmed rolling stock parameters to calculate brake interventions to the train within safe speed and distance limits.

ETCS operates in numerous levels (defined mainly by the type of communication between trackside and on-board equipment). Level 0 is defined for operating an ETCS fitted train on track which is not fitted with ETCS trackside equipment. In Level 1, trackside equipment transmits information to the train primarily by track-mounted transponders called Eurobalises (balises), and is intended to overlay on existing signalling without alteration of the signalling system. In Level 2, balises are primarily used for position reference and some fixed values, with operational information transmitted to the train by radio. Level 2 still relies on fixed block train detection (track circuits and/or axle counters), but lineside signals become redundant. Level 3 is specified as a moving block system with responsibility for train integrity moved from track based detection to an on-board function.

It is intended that the TfNSW network will eventually use a mixture of Level 1 and Level 2, dependent on operational characteristics of given areas, operating primarily in Full Supervision (FS) mode, to enforce speed and distance limits. This combined with intelligent rail traffic management systems, will be known as Advanced Train Control System (ATCS).

Due to the operational complexities of the TfNSW network and services (size of network, and size and deployment of rolling stock fleet and train crewing workforce), the path to FS is long and complicated. As a transitional arrangement, the Advanced train control Migration System (AMS) has been devised. Using Limited Supervision (LS) mode in Level 1, AMS is designed primarily for rapid deployment to manage risks which are not already protected by other engineered systems, and enable personnel to become familiar with the equipment before a more complex functionality is introduced.

Note – AMS is not intended to address/mitigate driver incapacitation, although it will keep the train within safe speed and distance limits (limit of authority management is

only applicable to the buffer stop protection) until the driver incapacitation defences intervene.

Geographic Data related to the rail infrastructure is used during AMS design to determine balise placement and also to configure the trackside data sent by the balises to the on-board equipment. Geographic data required for AMS has two components; location and gradient.

- The **Location** component is the longitudinal position of AMS Points of Interests (POIs) with respect to the track centreline. An AMS POI can be;
 - An existing asset, e.g. a signal,
 - Part of an existing asset, e.g. toe of a point where the turnout itself is the existing asset, or
 - A new asset, e.g. a balise.

The location data must have an accuracy of +/-2m and must allow for the calculation of relative distances between the POIs (i.e. kilometrage reference cannot be used as the location since relative distances cannot be calculated from these references). For the AMS project, Sydney Trains Geospatial Information System (GIS) data must be used as location data input for the existing network infrastructure.

- The **Gradient** component is the grade or slope for a section of the track where AMS target speed monitoring (TSM) is being implemented. The gradient data available from Sydney Trains Vertical Alignment Database (VAD) with reference from Survey Alignment Database (SAD) must be used as gradient data input for AMS.

2 Purpose

2.1 Scope

This guideline:

- Specifies the input geographical data for AMS design,
- Details the activities required to be carried out by the AMS detail designer for;
 - The balise installation in correct locations, and
 - The site verification of geographic location data.
- Details of the activities required to manage changes between input data and site measurements,
- Outlines the geographic measurements required to be handed over to Sydney Trains for maintenance.

This guideline:

- Does not detail configuration change management requirements for keeping geographic data up to date either during or after the completion of AMS project. It is assumed the project and/or maintainers of AMS will follow Sydney Trains configuration change management procedures. Refer to Sydney Trains document, Sydney Trains Configuration Management Plan for further detail on this process.

2.2 Application

This guideline is applicable to the AMS system integrator (TfNSW), concept designer, detail designer, data designer, balise installer and verifier of geographic data.

This guideline can also be used by the maintainer of AMS in relation to source and use of geographic data for AMS.

Reference material only

3 Reference documents

The following documents are cited in the text. For dated references, only the cited edition applies. For undated references, the latest edition of the referenced document applies.

International Standards

European Rail Agency (ERA) Specifications, Baseline 3 Maintenance Release 1

ASA Standards

ESC 210 Track Geometry and Stability

T HR TR 13000 ST Railway Surveying

SPG 0706 Installation of Trackside Equipment

Sydney Trains Documents

AISS-WI-056 WebGIS Help Guide

AMD-AMP-PL-001 Sydney Trains Configuration Management Plan

AMS Requirements

AMS System Requirements Specifications

AMS Trackside Subsystem Requirements Specifications

AMS Project Specifications

AMS Signal Design Principles

Gradient Simplification Design Guideline

Balise Placement and Metal Mass Guide

Reference material only

4 Terms and definitions

The following terms and definitions apply in this document:

Accuracy	Measurement tolerances for location data, in the context of this guideline, the true value is the actual location of a POI as found on site
AEO	Authorised Engineering Organisation
AIDF	Asset Information Delivery Form
AMS	Advanced train control Migration System
ATP	Automatic Train Protection
BG	Balise Group
BRM	Balise Reference Mark
BMM	Big Metal Mass
DPU	Data Pickup Unit
DSS	Detailed Site Survey
ETCS	European Train Control System
IRJ	Insulated Rail Joint
GIS	Geographic Information System
OHWS	Overhead Wiring Structure
POI	Points of Interest
Reference Asset	An existing asset used as reference to guide installation of balises. A specified distance from this asset along the track centreline represents the balise location in the network.
RFI	Request for Information
SAD	Survey Alignment Database

Reference material only

SCF	Site Certification Form
SI Unit	Air core inductor
Target Location	The Target Location refers to a point where a reduced speed, stop/trip instruction and/or an ETCS message comes into effect. Note: if the associated balise group can be placed within 100m of this location then this is also used as the Reference Asset for that balise group.
T/C	Test and Commissioning
TCM	Track Control Marks are points of reference measured by Sydney Trains surveyors and marked on a structure with a survey plaque.
TBC	Track Base Code
TSM	Target Speed Monitoring
VAD	Vertical Alignment Database
Vertical Centre Line	The vertical centre when the infrastructure is viewed perpendicular to the running rail.

Reference material only

Reference material only

The flow of geographic data through various stages of the AMS project is shown in Figure 1. Note this guideline does not detail all of the activities shown in Figure 1.

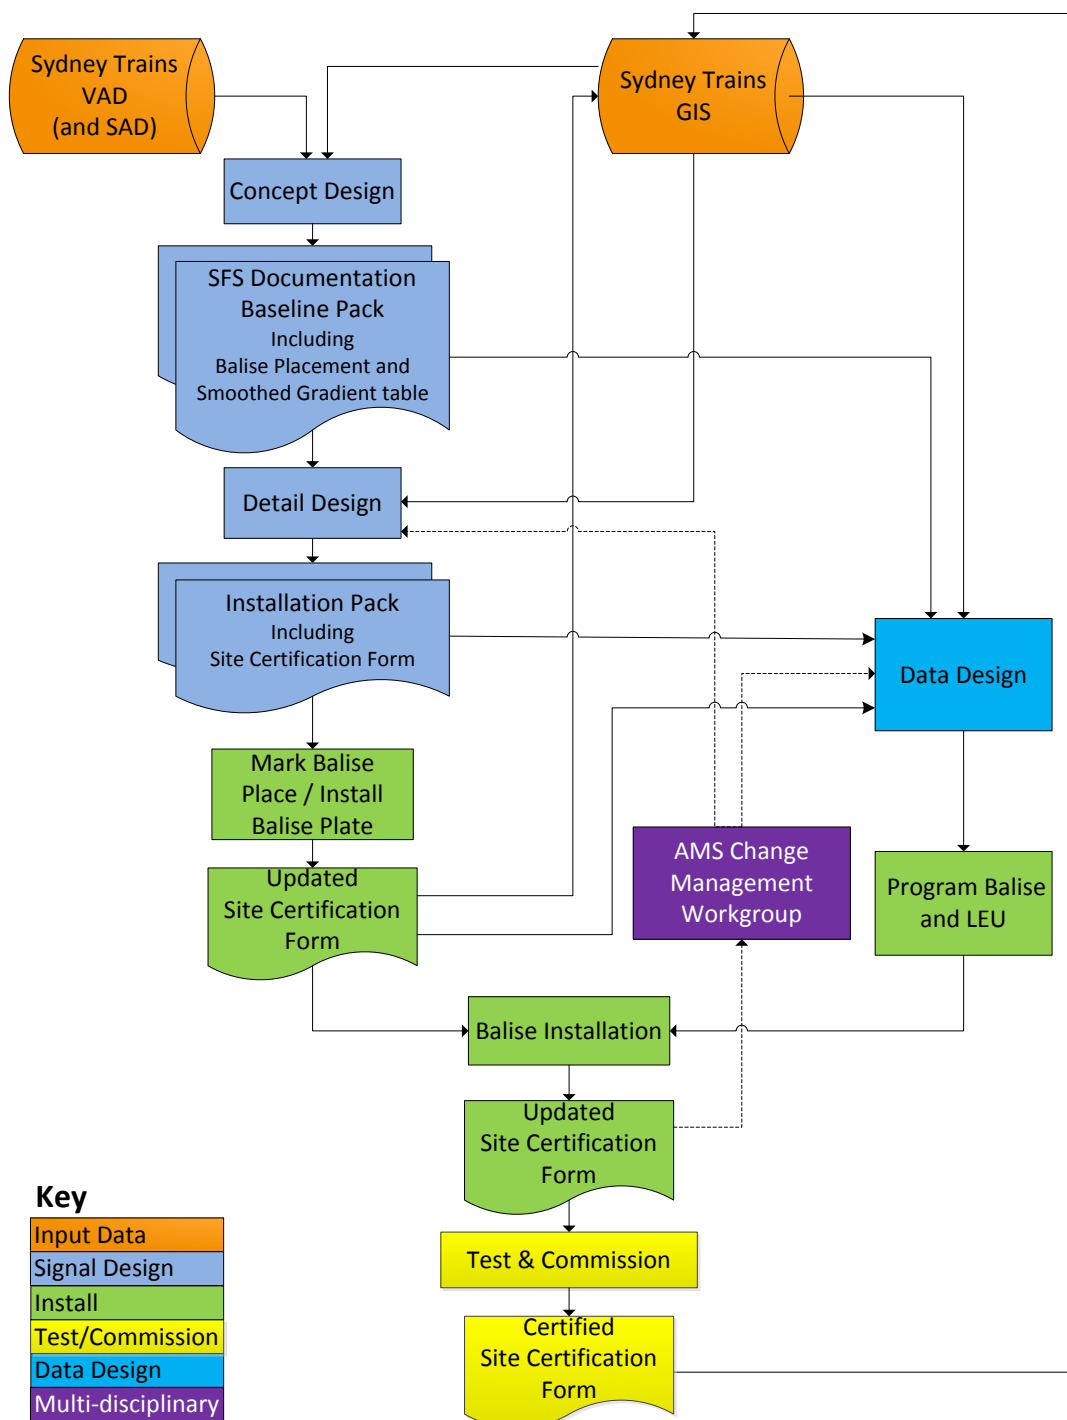


Figure 1: Flow of Geographic Data through AMS Project

Solid lines in the Figure 1 indicate mandatory transfer of data, while the dashed lines represent conditional transfer of data.

The AMS concept designer must use Sydney Trains GIS and Gradient data as the geographic data input to produce the associated AMS design pack. Refer to section 5.1 for further details on input sources for location data and section 5.2 for further details on the use of gradient data for AMS.

The associated AMS design pack including the concept location for balises and simplified gradient must be provided to the AMS detail designer and data designer. The detail designer will use these and other inputs to produce the AMS Installation Pack containing the Site Certification Form (SCF). A blank copy of the SCF is provided in Appendix A. Part A of the SCF is used to place the balises in their correct location on site and Part B of the SCF is used for site verification of geographic location data.

The AMS data designer uses the input location data from Sydney Trains GIS to start the data design activity. The data designer is provided with the concept location of the balises and simplified gradients produced by the concept designer as part of associated AMS design pack. The final designed locations of the balises are provided to the data designer after detail design through SCF Part A provided as part of the AMS Installation Pack.

The installer of AMS equipment shall carry out a site audit and mark the locations of the balises as per SCF Part A. The installer must verify the input geographic location using SCF Part B prior to installation of the balises. This can be carried out at the same time as marking of the balise locations. The updated SCF must be provided to the AMS data designer and the Sydney Trains GIS unit after these activities.

The Data designer must finalise data using the updated location of balises as provided in SCF Part A and adjust the location of existing assets where required using the verified locations given in SCF Part B.

Any further changes must be raised in AMS Change Management Workgroup. Changes can result from not being able to install balise in their designed/marked location and/or due to configuration changes to network infrastructure.

The SCF Part A will need to be certified by the AMS test and commissioning (T/C) team. However the SCF Part B, site verification of location data, does not require repeating unless the AMS Change Management Workgroup decides otherwise.

The certified copy of the SCF after T/C must be provided to Sydney Trains GIS unit for correction and/or maintenance of location data including the balise locations.

Note that the Sydney Trains Gradient data is only provided to the concept designer. The detail designer and the data designer take the simplified gradient from the concept stage as their input. This ensures the source of the gradient information is consistent throughout the various stages of design.

Refer to section 6 for details of the activities related to the use of the SCF, section 7 for details on the acceptable measurement process, section 8 for details on the AMS Change Management Workgroup and to section 9 for further details on handover of geographic data to Sydney Trains.

5.1 Input Source for Location Data

5.1.1 Primary Source for Location Data

Sydney Trains GIS data must be used as the input for location data for all existing infrastructure. Various interface and/or extracts of the GIS data are possible; two of the most common formats of GIS data are described below:

- **WebGIS** is a web based application provided by Sydney Trains which provides a visual interface to the GIS data. The WebGIS also offers various functions to aid the design process, refer to the Sydney Trains document: AISS-WI-056 WebGIS Help Guide for further information on the use of this application. This document can be accessed following the link under the 'Help' menu within the WebGIS application.
- **GIS Extract** is an extract of GIS data related to the AMS POIs only, provided by Sydney Trains GIS team upon request from the project. A guideline for details to include in a Request for Information (RFI) for a GIS Extract from Sydney Trains is provided in Appendix C. Since this extract is only a snap shot of the GIS database, it is prone to becoming mis-aligned with actual configuration on site and also WebGIS itself. The Data AEO needs to seek updated extracts from GIS and/or manage the changes through existing notifications/controls as per Sydney Trains Configuration Control Procedures. As a minimum a new extract should be requested at the start of Data Design for each AMS sector.

5.1.2 Alternative Sources for Location Data

Alternative input sources can be used only if the following conditions are met.

- If the location for a POI is not available from Sydney Trains GIS at the required accuracy of +/-2m, and
- The alternative source contains OHWS or other assets which can be used to verify the locations of the Reference Assets and/or the Target Locations on site.

The alternative sources listed below are in the order of preference.

- **Detailed Site Survey (DSS) drawings**

DSS plans are scaled drawings; therefore distances measured from DSS can be used as an input to the AMS project. DSS drawings contain the OHWS and use the same labels for them as shown on GIS. The OHWS can be used for site verification of input location data as per section 6 and relate the DSS locations to GIS data.

- MetroNet Transponders are not accurately shown on GIS. The latest **MetroNet Transponder Maps** provided by Sydney Trains Operations Technology Unit must be used for location of MetroNet Transponders.

The MetroNet Transponder location is given either as an actual distance from an existing asset, e.g. 9m Sydney Side of Signal 97.4 or, as a description relating the location to existing assets e.g. Centre of a Station Platform.

Where a distance from existing assets or OHWS are provided these can be used as an input. Where a description is provided, the related asset location on GIS shall be used to estimate the location of the MetroNet transponder, e.g. estimated position from GIS for mid-point of the associated platform shall be used if the description says the transponder is located at the centre of station platform. The existing asset and/or OHWS can also be used to relate the data from the MetroNet Transponder Maps to GIS.

Note that MetroNet transponders are suitable to be used as Reference Assets. However, balises cannot be installed within a certain distance from MetroNet Transponders. The detail designer shall use the 'Site Specific Notes' section of the SCF to instruct the site installer of the minimum distance required to be maintained.

Once the location data from the alternative source is related to GIS Data, it can also be aligned with the gradient data from Sydney Trains using the km references from GIS.

The location data source used must be clearly specified including the version and/or last updated date of the source in the associated AMS design pack.

5.1.3 Distance Calculations for AMS Design

All distance measurements for all AMS design must be derived using;

- The **Network Trace** function in WebGIS, or
- The **distance_from_start_of_tbc_meters** given in the GIS Extract.

Track Base Code (TBC) refers to a section of a track between two terminating nodes, e.g. from the buffer stop to a turnout etc. TBCs can be thought of as analogous to tracks for AMS, e.g. the Up Main North track is one particular TBC while the Down Main North is a separate TBC etc. Note that in the GIS Extract, the turnouts also have their own TBCs.

The field **distance_from_start_of_tbc_meters** provides the rolling distance from the start node of the track to each of the POIs for the track associated with that POI. Thus, this field can be used to calculate rolling distance between two POIs. Note that some POIs may appear multiple times in a GIS Extract with different TBCs associated to them, for example 'toe of points' are usually related to two different TBCs, one on the main track and one on the specific TBC used for the turnout, as shown in Figure 2.

The rolling distance calculated using the GIS Extract file should exactly match the distance derived by using 'Network Trace' function on WebGIS. However, since the use of 'Network Trace' function has the chance of introducing human error while placing the markers, the two can differ by a small amount, usually less than a meter.

As a result, rolling distance calculated using GIS Extract is preferred, unless a visual guide to the area is required to make the measurements and/or support decisions related to the measures. It is also easier to automate calculations of distances using software, e.g. MS Excel when working with the GIS Extract. As such, using WebGIS 'Network Trace' is more suitable and recommended for measuring distances during concept and detailed signalling design; refer to section 6 for further details. The use of GIS Extract is more suitable and recommended for data design.

When using the GIS Extract, the distances between POIs located on different tracks must be calculated by adding together distances in the individual tracks/TBCs as shown in Figure 2.

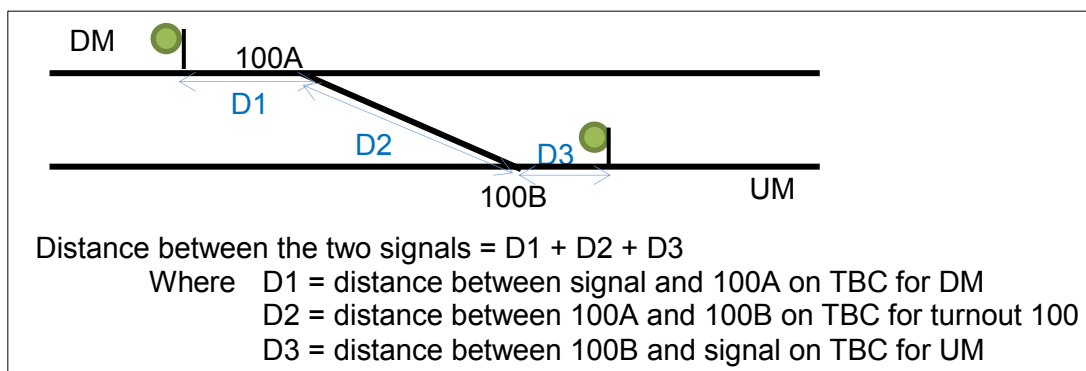


Figure 2: Distance Calculation for POIs on separate track

The Network Trace function should allow the designer to trace the distance between any two POIs as long as there is a valid path between them, e.g. via a turnout as shown in Figure 2.

If it is not possible to use the Network Trace function in the WebGIS or calculate distances using the GIS Extract, then one of the following methods can be used.

- Using approved scaled drawings, like Detail Site Survey drawings etc.
- Using 'Measure' function in WebGIS with aerial image. This function gives the point to point measure along a straight line. Thus, multiple measures need to be added to give the complete distance along curved tracks and if POIs are located on different tracks.

If it is not possible to use any of the methods described above for calculating distance, the designer shall consult TfNSW on an appropriate alternative source through an RFI.

The designer must record the source and method used in the associated AMS design pack.

5.1.4 Site Verification Requirement for Location Data

Input location data for all Reference Assets and Target Locations need to be site verified for all of the above mentioned sources including Sydney Trains GIS.

Furthermore, the installation of the balise will need to be certified with reference to the Reference Asset, and for any other requirements mentioned in the AMS Project Specification: AMS Signal Design Principles. Refer to section 6, Appendix A and Appendix B for further details.

5.2 Input Source for Gradient Data

5.2.1 Primary Source for Gradient Data

Gradient data extracted by Sydney Trains Survey Office using the VAD with reference from SAD is provided to the AMS concept designer.

The concept designer must use the rules provided in the AMS Project Specification: Gradient Simplification Design Guideline to simplify the gradient prior to using it for AMS design. As per the Gradient Simplification Design Guideline, the concept designer must record the furthest target location and the lengths over which the gradients apply. The furthest target location can be identified in the location data using its asset name and track description, and thus can be used to align the simplified gradient with the GIS data. The concept designer must include all the simplified gradients in the associated AMS design pack.

5.2.2 Alternative Sources for Gradient Data

There are areas where Sydney Trains' gradient data does not exist. In most cases these areas are outside the AMS project scope.

If a VAD gap is being encountered where TSM is being implemented under AMS, then the concept designer must raise an RFI to TfNSW for assessment and rectification.

TfNSW with consultation from Sydney Trains Survey Office shall decide the final gradient to be used for the gap area and communicate this to the detail designer and data designer.

The concept designer must also record the area and the action taken in the associated AMS design pack.

5.2.3 Site Verification Requirement for Gradient Data

The gradient data provided by Sydney Trains is the design grade for the tracks. This is the grade the track is constructed and maintained to. As such no further site certification of the gradient data is required.

6 Use of Site Certification Form

The Site Certification Form (SCF) contains two sections, Part A used for advising the correct location for balise installation and Part B used for geographical data verification. A blank SCF is provided in Appendix A.

In AMS, the positions to install balises are given as distances from existing assets. These existing assets are referred to as the **Reference Asset** for the balise group.

Balises in AMS are used to communicate specific trackside information, such as Target Speed, display of an ETCS message or other changes coming into effect at a specified location. This location is referred to as the **Target Location** for the balise group. Depending on the AMS function, this location can be hundreds of meters ahead of a balise group to provide enough time/distance for the system to transition from one speed or state to another. This means the Target Location is not always suitable to be the reference for installation of balises.

The maximum allowable distance between the balise group and the reference location used for installing the balise is dependent on the accuracy of measurements. Using a measuring wheel or other such tools should allow for measurements of up to 100m with an accuracy of +/-2m. Greater distances could be measured while maintaining +/-2m accuracy using more precise tools. The tools used and their precision must be recorded in the SCF by the installer.

Where the distance between the target location and the associated balise group is within 100m, the target location becomes the reference asset. If the Target Location is more than 100m from the balise than a separate asset within 100m must be identified to be the Reference Asset for that balise group.

If a Target Location is within 100m but it is not related to an existing asset, for example entry/exit to Yard locations or level transition boards, then separate Reference Asset must be selected for that balise group. An acceptable list of existing assets which can be used as Reference Asset is provided in section 6.4.

A balise group must have only one Reference Asset.

A balise group can have multiple Target Locations if it is providing information related to multiple hazard locations. Where balise groups are used for protecting high risk turnouts, the toe of points either side of the turnout need to be listed as target locations. All of these Target Locations will need to be recorded in SCF Part B and site verified, refer to Appendix B for examples of Target Locations for different AMS functions.

The Reference Asset and Target Location will generally differ only for High Risk Speed Signs, High Risk Turnouts and some High Risk Overlap Deficiencies. For High Risk Speed signs the Reference Asset is the speed sign where the BG is placed and the Target Location is the High Risk Speed Sign itself. For High Risk Turnouts / Overlap Deficiencies, the Reference Asset is generally the signal interfacing with the LEU and the Target Location is the actual Turnout/Overlap being protected. For other functions the hazard being protected will generally be close enough to the optimal location for the BG such that it can be used as the reference asset for balise installation. A list of acceptable Reference Assets is provided in section 6.4. The measuring points for Target Locations and Reference Assets and the process of manual measurements are provided in section 7.

The activities shown in Figure 3 are to be carried out by the AMS detail designer, installer and T/C team to complete and update the SCF at different stages. Refer to section 5 for the overall process of use of geographic data for AMS. The activities in Figure 3 are numbered to align with the diagrams in Figure 4 and Appendix B, providing a visual aid to understand these activities. Appendix B also shows the corresponding entries to the SCF for the different AMS functions.

Note that number (9) in Figure 4 and Appendix B is not mentioned in Figure 3; this is the distance between the two balises in a balise group as mandated in the AMS Project Specification: AMS Signal Design Principles.

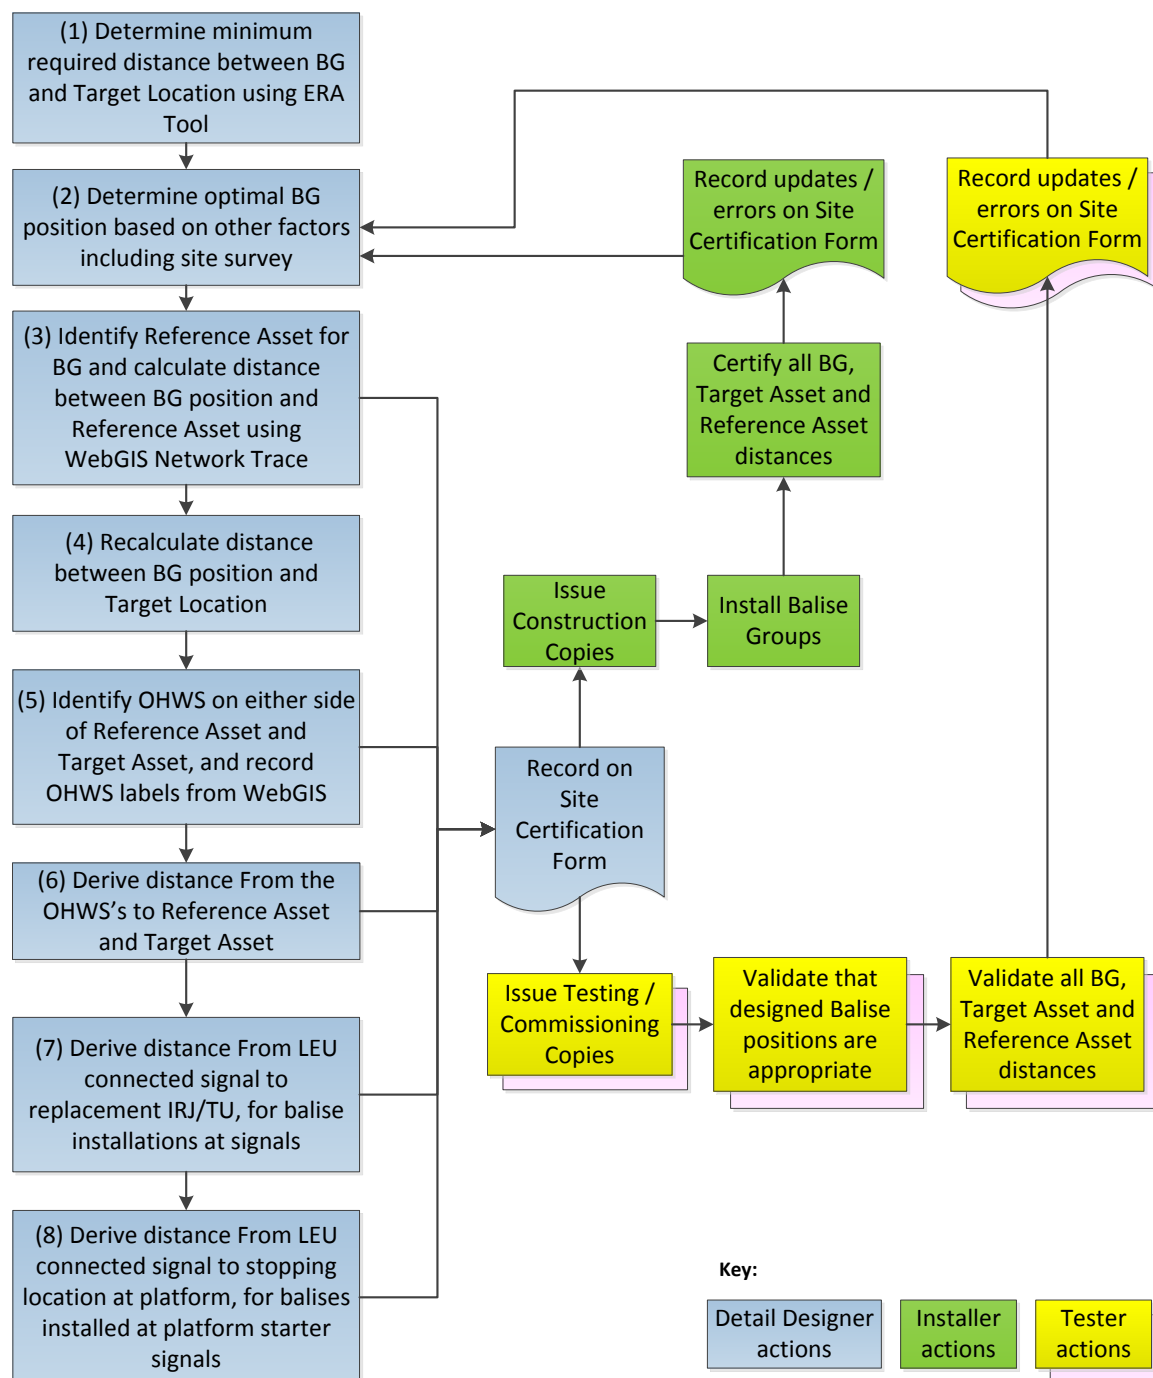


Figure 3: Activities related to completing and updating SCF at various stages

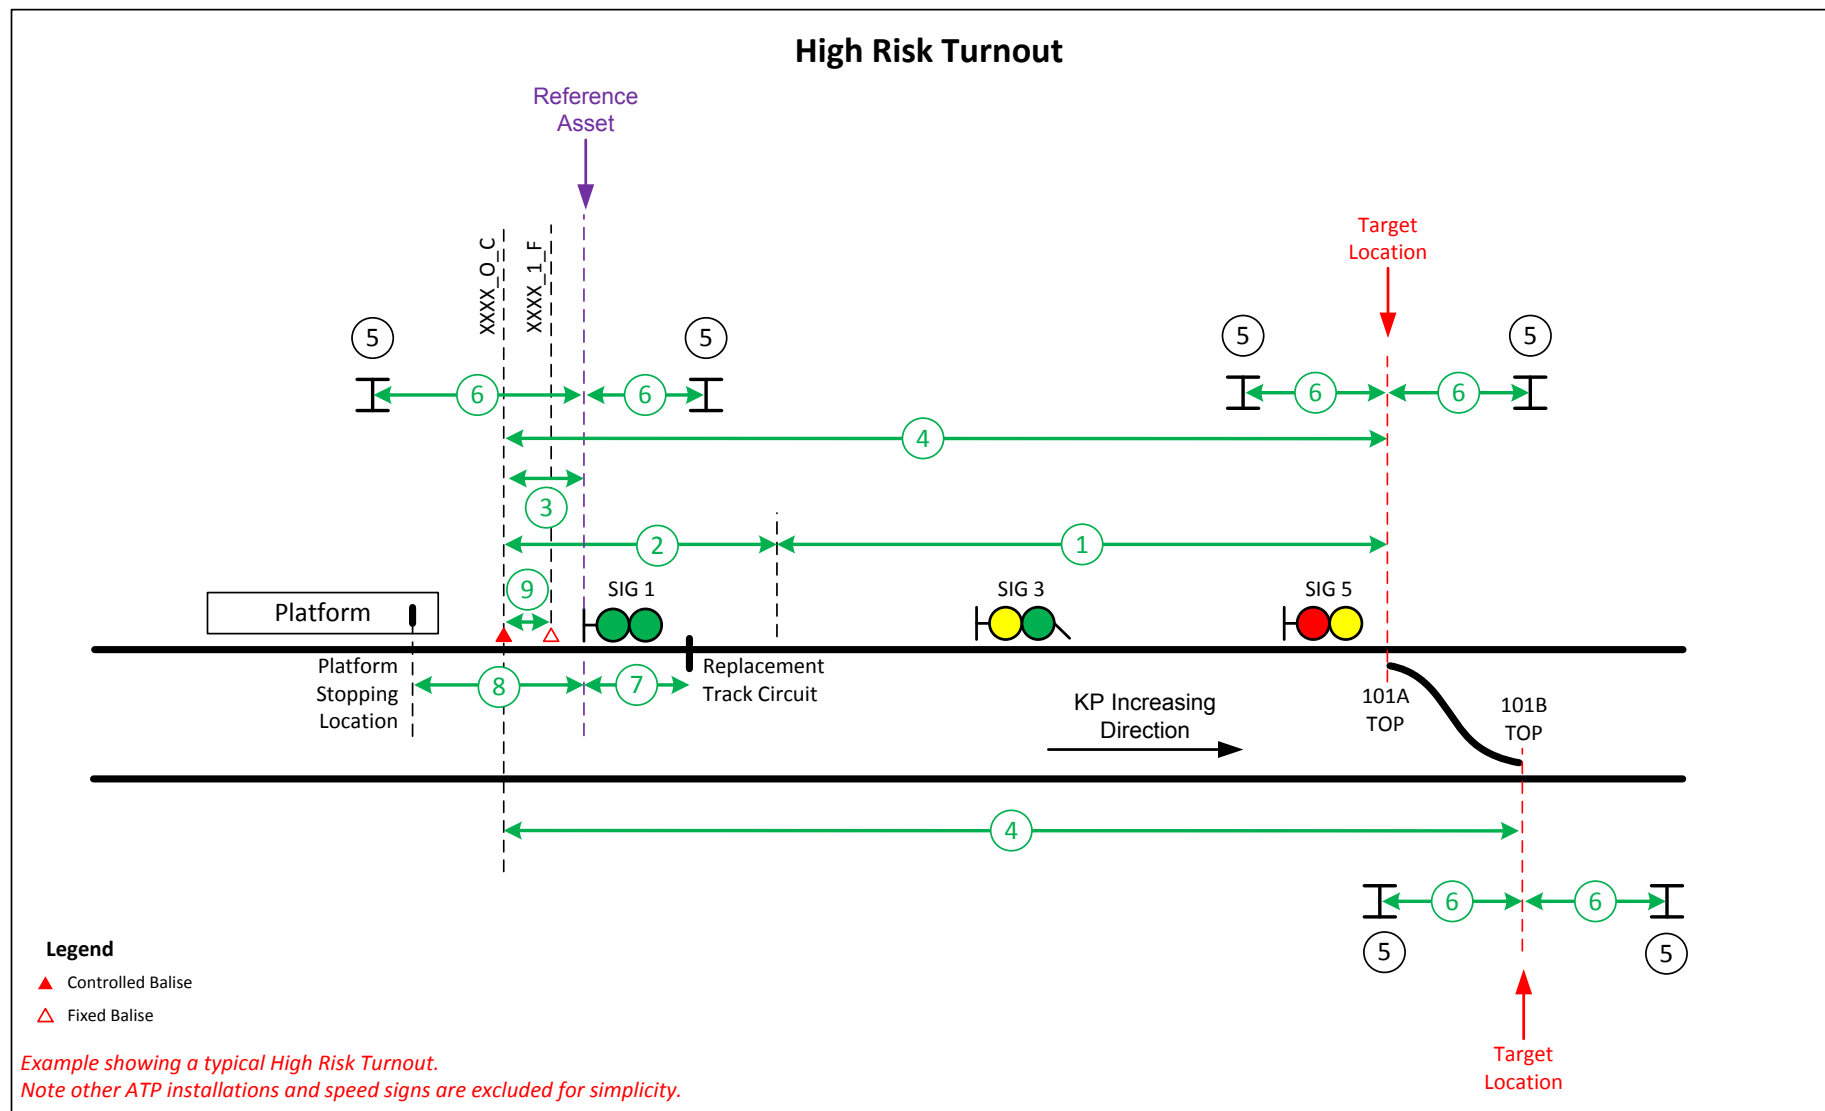


Figure 4: Distances the designer needs to measure using Sydney Trains GIS data and record in SCF

6.1 Identifying Balise Position and Locations for Verification

The activities shown in blue in the flowchart given in Figure 3 should be undertaken by the AMS detail designer to identify the intended / optimal position for each balise group, and the necessary site measurements required to verify the Reference Asset and Target Location(s) associated with the balise group.

The AMS detail designer carries out tasks (1) and (2) as shown in the flowchart in Figure 3 to determine the optimal location for a balise group. If the optimal location is within 100m of the hazard being protected by the balise, then this hazard is the Reference Asset as well as the Target Location for the balise group. In this situation, it is sufficient to only populate the Reference Asset fields of SCF for that BG.

If the Target Location is more than 100m from the optimal location for the BG than a separate Reference Asset must be identified and the distance between the balise location and Reference Asset needs to be derived, this is task (3) in Figure 3. In this situation, fields related to both Reference Asset and Target Location will need to be populated in SCF for that BG.

If the final distance between the Target Location(s) and the balise group is different to the minimum distance then the final distance will need to be recorded in the associated AMS Design Pack along with the minimum distance. Calculating the minimum distance between BG and Target Location is task (1) and the final distance is task (4) in Figure 3.

Note that the position of balise group is the position of the first balise in the balise group, this balise is associated with $N_PIG = 0$. Thus the distance between Reference Asset and BG is to be populated in the column corresponding to the balise $N_PIG = 0$ in SCF Part A. The next balise in balise group is to be installed within specified distance from the first balise, as per the AMS Project Specification: AMS Signal Design Principles. The detail designer shall add this specified distance to the distance between Reference Asset and BG to populate the column corresponding to the Balise $N_PIG = 1$. Refer to AMS Project Specification: Trackside Design Guideline for further details on N_PIG .

For each Reference Asset and Target Location(s) the designer also needs to identify OHWS on both sides, and measure the distances from the Reference Asset/Target Location(s) to the OHWS. These are to be recorded in SCF Part B and used for verification of location data used in AMS design. If a speed sign is used as Reference Asset or Target Location and the speed sign is located on an OHWS, then it is sufficient to enter the OHWS label in the "Sydney Side OHWS Label" of SCF Part B, and to enter a measurement of Zero as associated distance. These are tasks (5) and (6) in Figure 3.

The detail designer must also derive the distances mentioned in tasks (7) & (8) where applicable and record them in SCF Part A.

All distances derived and/or decided by the detail designer must be populated in the 'Design' fields of the SCF. All measurements must be recorded to one decimal place, i.e. to closest 10 centimetres, following nominal mathematical rounding. For example, a measure of 2m 35 cm shall be rounded to 2m 40cm and be recorded as 2.4m in SCF; similarly a measure of 2m 32cm shall be rounded to 2m 30cm and be recorded as 2.3m in SCF. All distances in SCF Part A need to be directional, with a Positive (+) distance indicating going further from Sydney and Negative (-) distance indicating coming closer to Sydney.

The detail designer shall use the 'Site Specific Notes' section of the SCF to record/request any other measurements required to be site verified, e.g. verification of distance to BG from additional assets, where the Reference Asset is more than 100m away from the BG. Refer to section 6.4 for further details on acceptable Reference Assets.

The SCF should be included as part of the installation package and be used by the installers to record site measurements in the 'Actual' fields of the SCF and the Tester/Commissioner for verifying the measurements recorded by the installers.

6.2 Balise Installation and Site Validation

The activities shown in green in the flowchart in Figure 3 should be undertaken by installers.

The installer shall carry out an initial site audit prior to installation of balises to ascertain that the balise positions and other measurements specified in SCF Part A are achievable. If it is not possible to install the balises less than +/-2m from their specified designed locations and also adhere to all other specified restrictions, then the detail designer must be consulted to make appropriate changes and reissue the SCF with updated values in the relevant design field of SCF Part A. The installer must also carry out the verification of geographic data at this stage; refer to section 6.3 for further detail of verification of geographic data. Any updates to the SCF must also be provided to the data designer for updating the ETCS data.

The installer must update SCF Part A by populating the 'Actual' fields with distances measured on site given in metres after the installation of the balises. The same rounding

rule and use of Positive (+) and Negative (-) signs as per section 6.1 apply. Note that all distances must be written clearly and concisely or typed, to avoid any misinterpretation during data design.

All installation must also comply with other balise placement restrictions mentioned in AMS Project Specification: AMS Signal Design Principles.

Once the green (Construction) copy of the Site Certification Form has been returned by the installers, it will be issued for either testing (pink copy) or Commissioning (yellow copy), along with the updated circuit books and other testing / commissioning documents.

The activities shown in yellow/pink in the flowchart in Figure 3 should be undertaken by testers to validate the Balise Group positions. This means only the measurements in SCF Part A need to be certified by the testers, unless otherwise advised by the AMS Change Management Workgroup. It is sufficient for the tester to place a tick next to the actual measures in SCF Part A, to denote the measure as certified.

Where measurements vary by +/-2m or more from the actual measurements recorded during installations, the SCF must be updated with a line through the old measurement in the actual field and the new measurement recorded next to it. The tester must also check all installations comply with other balise placement restrictions mentioned in AMS Project Specifications; in particular AMS Signal Design Principles and any misalignment needs to be recorded. The updated SCF must be provided to AMS Change Management Workgroup for advising necessary changes in ETCS data or balise locations.

6.3 Site Verification of Geographic Location Data

The installer must check the distances from Reference Assets and Target Locations to OHWS as provided by the detail designer in SCF Part B. This activity is required to be carried out prior to the actual installation of balises to provide the data designer enough time to update ETCS data with the site verified locations if data change is required. The installer must record the actual measurements in meters in SCF Part B. The same rounding rules, as per section 6.1 apply.

The installer may choose to carry out the above activity at the same time as the initial site audit carried out to ascertain the balise locations are achievable.

The updated SCF must be provided to the data designer and Sydney Trains GIS Unit.

Unless otherwise decided by the AMS Change Management Workgroup, this is the only time verification of geographic location needs to be carried out.

6.4 Acceptable Reference Assets

The Reference Asset needs to be identifiable in the input location data and be easy to locate on site. The following assets can be used as a Reference Asset; they are listed in the order of preference.

Note: The Target Location of the BG, given it is within 100m of the BG and relates to one of existing assets mentioned below, must be the Reference Asset for that BG.

- Signals including Fixed Red Signals
- Speed signs
- Stop Signs
- Buffer stops
- Toe of points (TOP)
- Start of throw rail for catch points
- Km or half Km posts
- End of line¹
- Level/Pedestrian crossing edge¹
- Edge of Big Metal Mass (BMM)¹
- Platform stopping location¹

OHWS must not be used as Reference Asset since these are used for site verification of input location data.

If the Reference Asset is more than 100 metres away from the balise position, a second, closer infrastructure asset and distance shall be used to check the measurement. A OHWS can be used as the second infrastructure asset. This asset and distance from this asset to the balises shall be recorded in the 'Site Specific Notes' of SCF. The same rounding rule and use of Positive (+) and Negative (-) signs as per section 6.1 apply for these distances. This scenario is expected to be rare and only occur around announcement, level transition, wrong running protection and/or big metal mass protection balise groups.

¹ GIS may not have the exact location for this AMS POI; as such this POI may not appear in the GIS Extract. Aerial photos from WebGIS can be used to measure distance to/from this POI. For example, GIS usually has the mid-point of platforms and not the actual edge of the platform.

Note that a level transition board cannot be a Reference Asset since these are new sign posts being installed by the project. Therefore, announcement and level transition balises will need to have other Reference Assets and the Level Transition Board will need to be placed at distances from these balise groups as mentioned in AMS Signals Design Principles.

7 Site Measurement Process

7.1 Measurement Points

This section details the measurement points for balise, OHWS and other existing assets likely to be a Target and/or Reference asset.

7.1.1 General Requirements

For assets with an existing survey pin and/or Track Control Mark (TCM), the survey pin must be used as the measurement point for this asset. For example, the arrow in Figure 5 points to the survey pin associated with an OHWS.

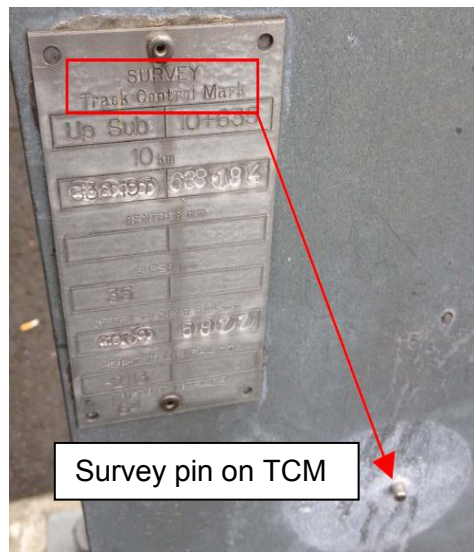


Figure 5: Survey pin located on an Overhead Wiring Structure

In the absence of a survey pin, the vertical centreline of the infrastructure can be regarded as the measurement point for the asset unless otherwise mentioned within this guideline.

The vertical centreline of a Speed Board mounted on an OHWS and a post mounted signal are shown in Figure 6.

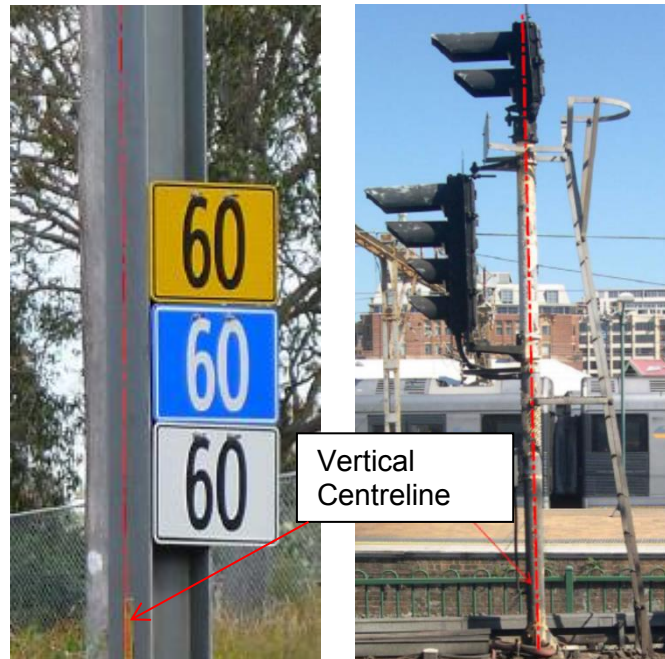


Figure 6: Vertical Centreline of infrastructure

7.1.2 Gantry Signals

Gantry signals often have more than one post supporting the gantry structure. Where there are multiple supporting posts, the vertical centreline of the first post encountered in the direction of travel associated with that signal shall be the measurement point for that gantry signal. Refer to Figure 7.

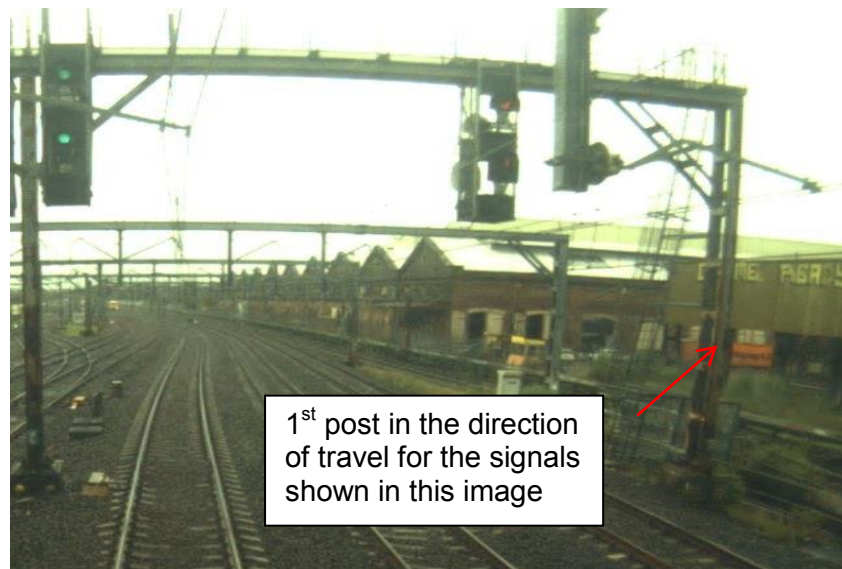


Figure 7: Measurement point for mechanical Trainstop

7.1.3 Catch Points

The measurement point for catch points must be the start of the throw-off rail, as shown in Figure 8.

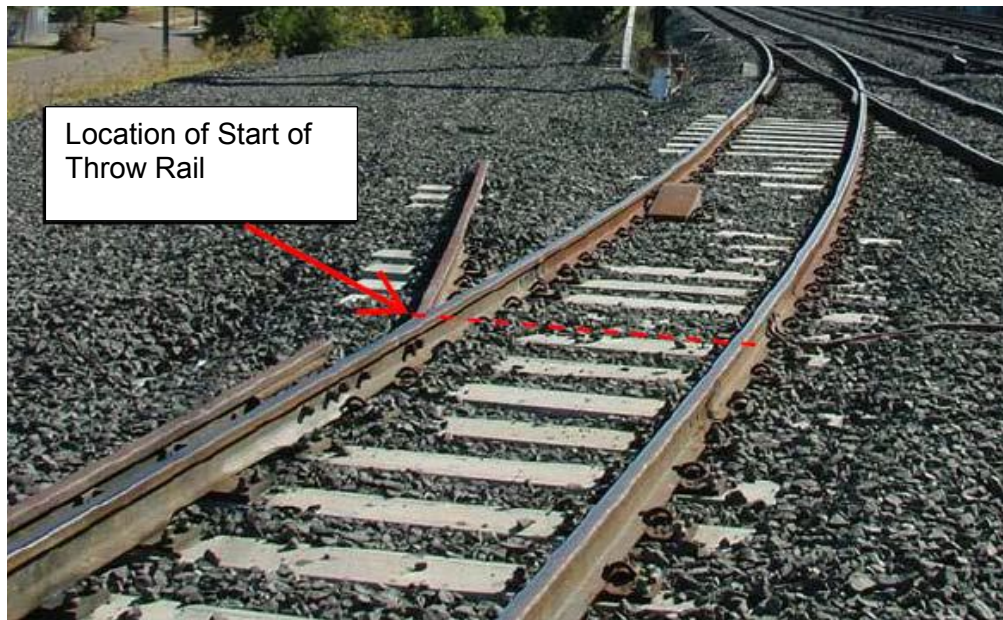


Figure 8: Measurement point for Catch Points

7.1.4 Toe of the Points

For the toe of a set of points, the measurement point must be the end of the blade of the switch rail as shown in Figure 9 below.

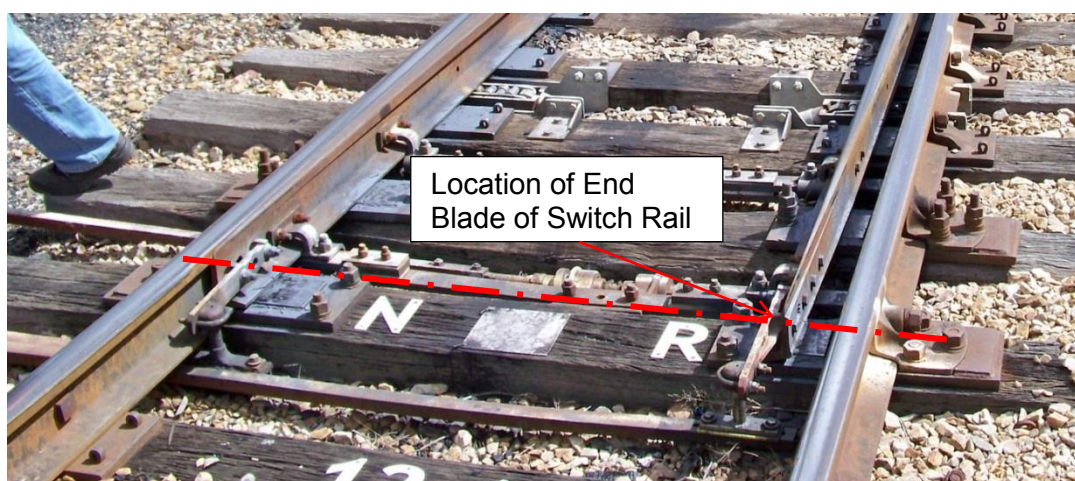


Figure 9: Measurement point for Toe of Points

7.1.5 Platform Stopping Locations

Platform car markers indicate the operational stopping location for rolling-stock of various lengths. Where the car markers are painted on the platform, the centre of the car marker is the measurement point for that car marker, as shown in Figure 10.

The vertical centreline of the post must be taken as the measurement point for car markers placed on posts.

Note that some smaller platforms have their car markers located several meters away from the platform itself.

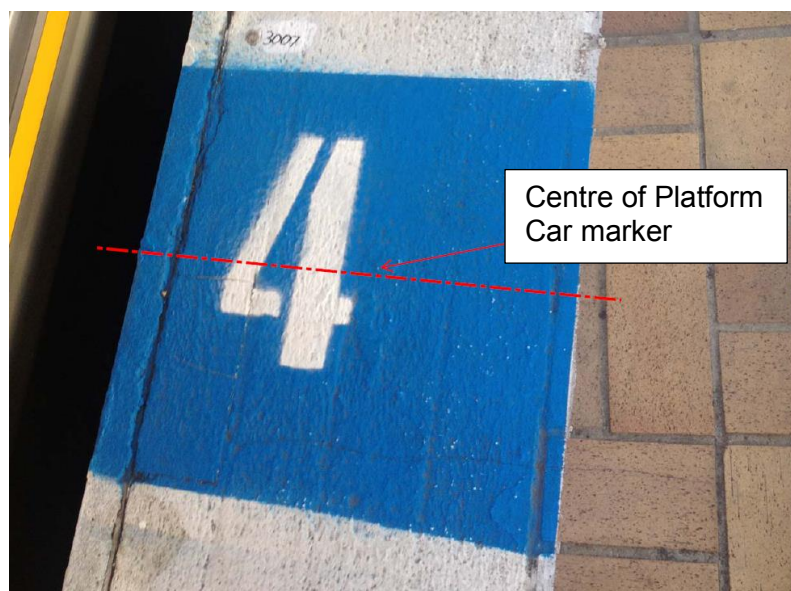


Figure 10: Measurement point for Car Markers painted on Platform

Where there is no platform car marker for a platform, the edge of the platform must be used as the operational stopping location for that platform.

The measurement point for the edge of a platform must be the end point of the usable platform area, i.e. typically the end of platform fence as shown in Figure 11.



Figure 11: Measurement point for Edge of Platforms

7.1.6 Track Circuits

For Insulated Rail Joints (IRJs) or Block Joints, the vertical centreline of the joint must be used as the measurement point, as shown in Figure 12.

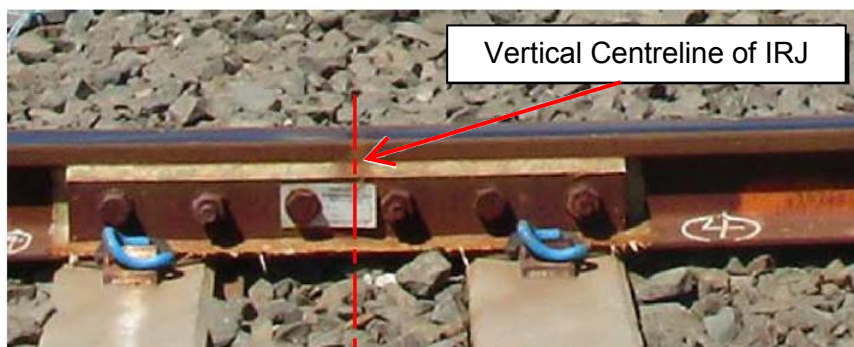


Figure 12: Measurement point for IRJs

For Tuned Loops, the rail connection of the tuning unit closest to the proposed Balise Group position must be used as the measurement point. The rail connection for a tuning unit is shown in Figure 13.

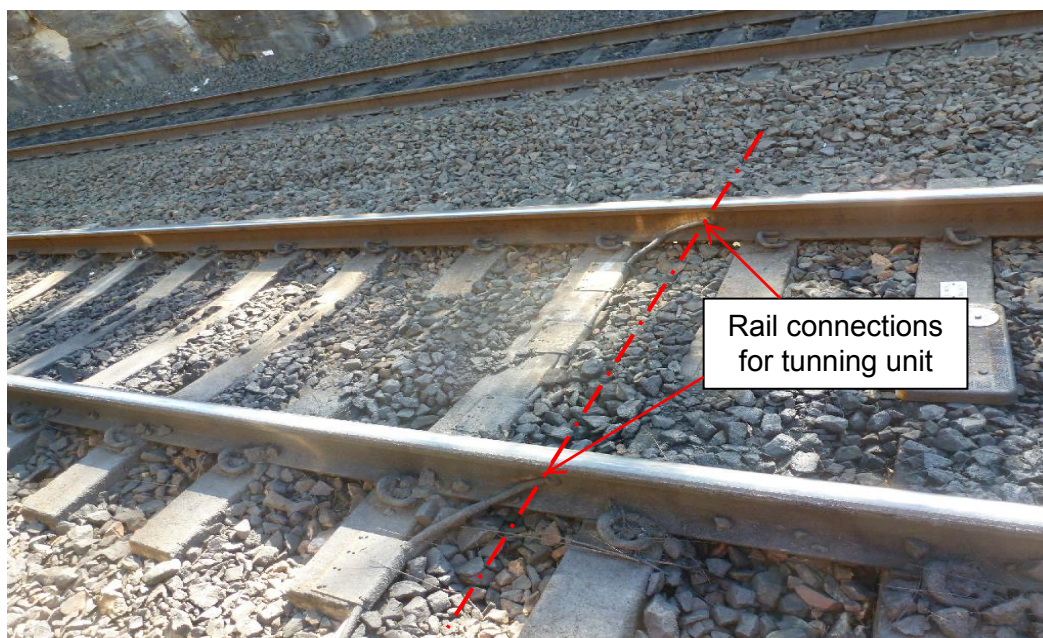


Figure 13: Measurement point for a Tuning Unit

Note that the measurement points mentioned here are not related to the replacement point of track circuit; refer to AMS Project Specifications: AMS Signal Design Principles for the replacement point of track circuit.

7.1.7 Level Crossings

The measurement point for a level crossing is the closest edge of the level crossing in the direction of travel. If the crossing is traversed in both directions, the location of both edges of crossing may need to be captured. These are then to be denoted as the Sydney Side and Country Side edges to differentiate between the two POIs.

The edge of crossing is the point where the road (or walkway) surface meets the rail, as shown in Figure 14.

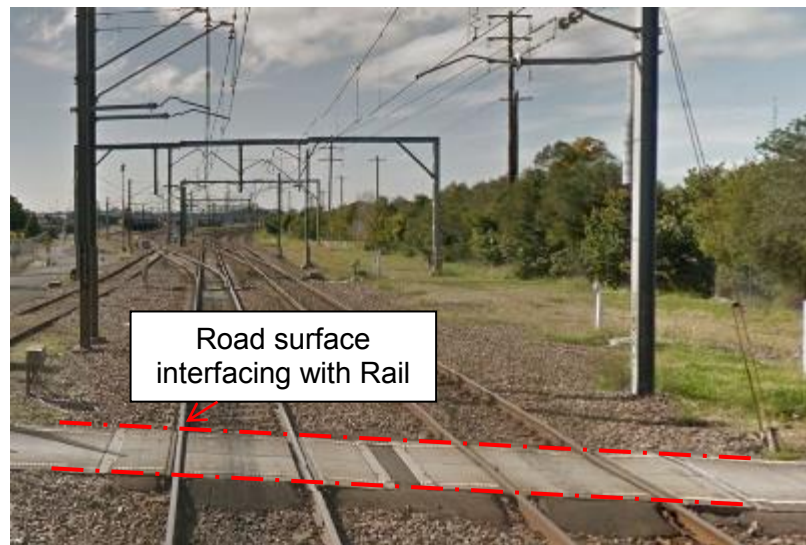


Figure 14: Measurement points for Crossings

Where multiple crossings (pedestrian and/or road crossings) are located side by side, as shown in Figure 15, they are to be treated as one continuous crossing and the two edges at the extremities are to be used as the measurement points.

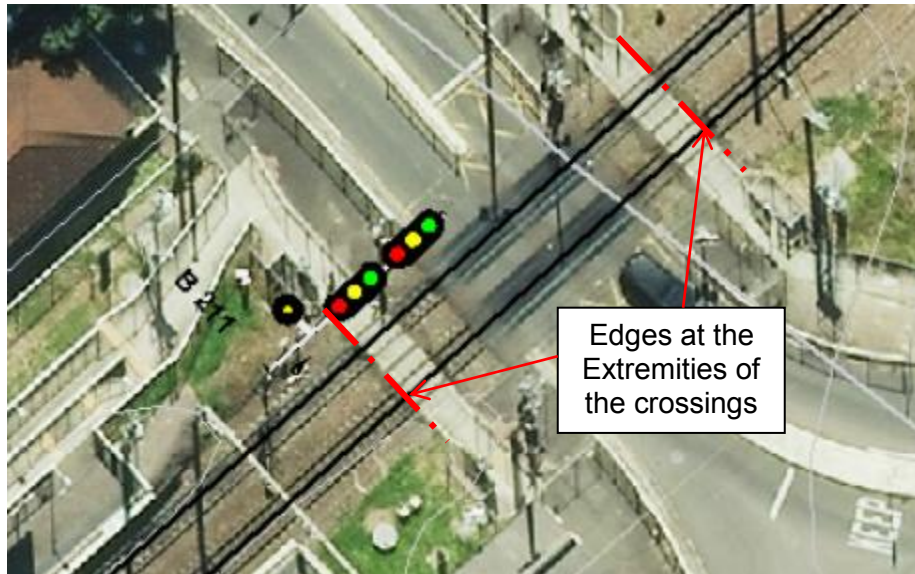


Figure 15: Measurement points for multiple crossings located side by side

7.1.8 Balise and Balise Group

The Balise Reference Mark (BRM) as specified by the supplier must be used as the measurement point for individual balises. Figure 16 shows the BRM for an Alstom Balise.

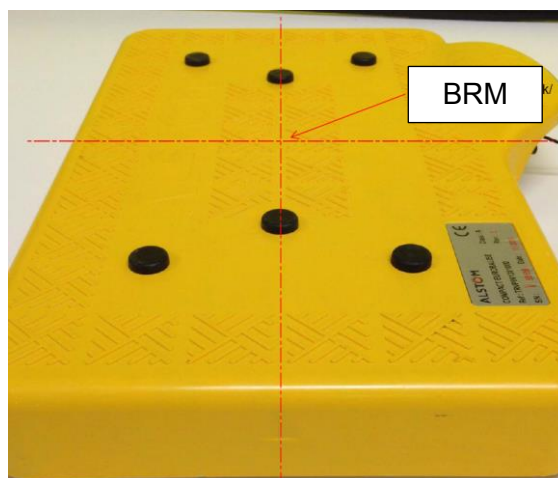


Figure 16: Balise Reference Mark on Alstom Balise

7.1.9 Buffer Stops

The measurement point for a buffer stop is the face of the buffer stop, as shown in Figure 17.

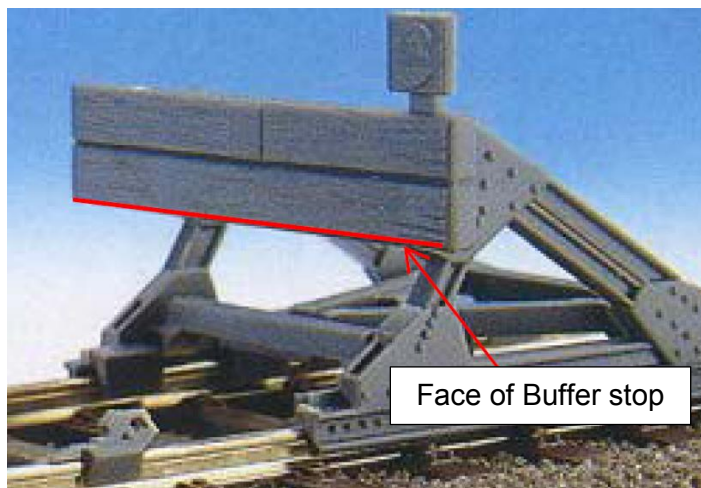


Figure 17: Measurement point for buffer stop

7.1.10 End of Line

End of Line refers to the physical end of the track; this is the point up to which rolling-stock can move without derailing, running into dirt or other infrastructures except buffer stops.

Since this location is usually beyond the operational stopping location, it will not be possible to capture data on this location using survey vehicles. As such WebGIS may not always allow for 'Network Trace' up to the end of track.

This location can be approximated from aerial photos using the 'Measure' function of WebGIS or other means as long as a safe approximation is made. For example the measurement point shown in Figure 18 is the middle of the third last sleeper of the track as shown with the dotted line. This is a safe approximation for the end of track shown in the solid line. All approximations made need to be noted as 'Site Specific Notes' in SCF, since the same measuring point will need to be used on site.

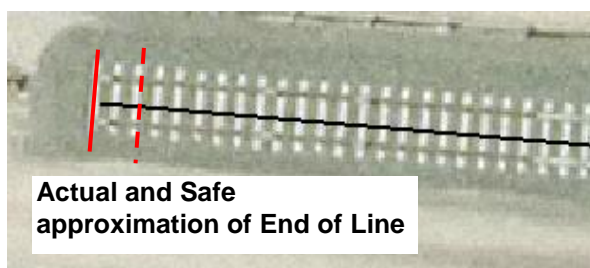


Figure 18: Example measurement point for End of Line

7.1.11 Big Metal Masses

Big Metal Masses are infrastructure containing metal that may affect the ability of an AMS fitted train to read a Balise. BMMs must be recorded for both ETCS Level '0' (not

fitted with AMS) and ETCS Level '1' (fitted with AMS) areas. Refer to AMS Project Specification: Balise Placement and Metal Mass Assessment for details on what constitutes a BMM and what parameters are required to be captured in addition to its geographical location.

The measurement points for BMMs are determined by the type of asset it is. For example, if a level crossing is considered as a BMM, the measurement point for crossings as described in section 7.1.7 will apply.

If the asset is not exclusively described in this guideline, the measurement points are the two edges of the asset interacting with the rail surface and/or parallel to sleepers. These are to be denoted as the Sydney Side and Country Side edges.

7.2 Measurement Tools

The tools to be used for the measurement of geographic data for AMS must satisfy the following:

- The tools must not interfere with the signalling system, e.g. short-circuit track circuits
- The tools used must be safe to be used within the vicinity of the 1500V DC overhead wires
- The tools, along with the process must be able to measure up to a distance of 100m with an accuracy of +/-2m
- The tool(s) used, it's precision and calibration date (if applicable) must be recorded in the SCF.

7.3 Measurement Procedure

The procedure below details the steps for measuring distances to mark and/or install balises and to site verify Reference Asset and Target Location(s) associated with the BG. The tester/certifier of the BG can follow the procedure for measuring distances mentioned in SCF part A and 'Site Specific Notes'.

The following procedure must be used in conjunction with the Site Certification Form provided in Appendix A. Figure 19 gives a visual indication of the process. The numbers shown in Figure 19 refers to the numbered activities mentioned in Figure 3.

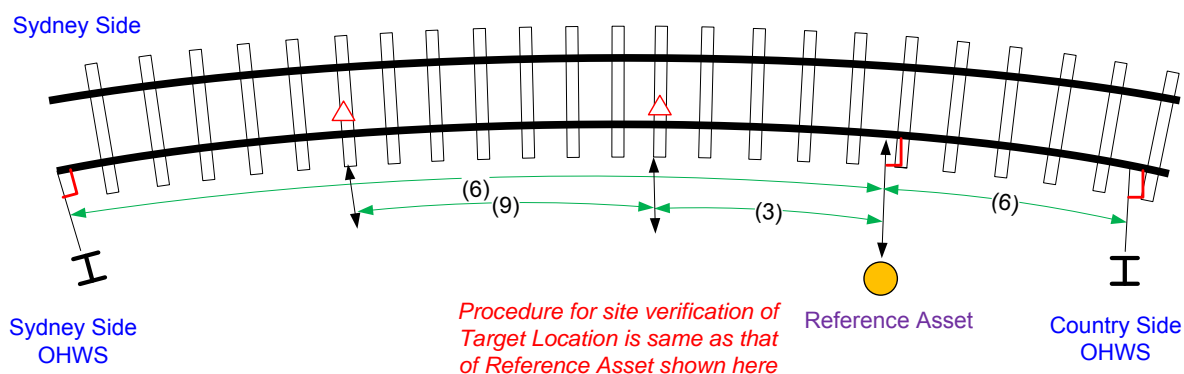


Figure 19: Measurement Procedure for AMS

1. Identify the Reference Asset on site and identify the measurement point on the asset as detailed in section 7. Mark the measurement point if required to maintain accuracy of the measurements.
2. Identify the location perpendicular to the measurement points on the nearest rail of the designated track (the track associated with the Reference) as shown in Figure 19. Mark the position of the rail if required to maintain accuracy of measurement.
3. Measure out the distance from the Reference Asset to the balises in the balise group as specified in the SCF Part A.
4. If the distance falls in between two sleepers, identify the nearest sleeper suitable to install the balises (where applicable).
Various mounting options exists for installation of balises, both on sleeper and between sleepers; refer to SPG 0706 Installation of Trackside Equipment for further information.
Ensure the balises meet all restrictions applicable, as specified in AMS Project Specifications: AMS Signal Design Principles.
5. Mark the balise locations and/or install the balises and update SCF Part A accordingly. When marking the balise locations use appropriate marking equipment to mark both the sleeper (where applicable) and the side of the rail.

Note that the steps 6 to 10 are for site verification of Reference Assets and Target Locations only and related to SCF Part B. Generally they would only be carried out at the same time as marking the balise locations, refer to section 6.3 for further information.

6. Identify the OHWSs associated with the Reference Asset as described in the Site Certification form and identify the measurement points for these as detailed in section 7. Identify the location perpendicular to the measurement points on the nearest rail of the designated track.
7. Measure and Record distances between the Reference Asset and the OHWSs associated with it in the actual field in SCF Part B.
8. Identify all Target Location(s) associated with the BG and identify their measurement points as detailed in section 7. Identify the location perpendicular to the measurement points on the nearest rail of the designated track.
9. Identify the OHWSs associated with the Target Location(s) as described in the Site Certification form and identify the measurement points for these as detailed in section 7. Identify the location perpendicular to the measurement points on the nearest rail of the designated track.
10. Measure and Record distances between the Target Location(s) and the OHWSs associated with it in the actual field in SCF Part B.

8 AMS Change Management Workgroup

The purpose of the AMS Change Management Workgroup is to analyse any changes occurring after the marking of balise location and/or verification of location data, and make decisions on subsequent changes. Depending on this decision, the detail designer, site installer and/or data designer may need to revisit activities described in this guideline.

These changes may relate to the installer not being able to install the balises in their previously marked locations. Other concurrent projects may also change the configuration of the infrastructure, including a change to the location of existing assets and/or change in vertical alignment of the track. The later can lead to changes in location of Reference Assets and/or Target Locations used in AMS. The AMS Change Management Workgroup need to analyse these changes and their impact on AMS functions implemented in the area in order to decide on one or more of the following;

- Change AMS design including relocation, removal and/or inclusion of balises.
- Change ETCS data.
- Repeat site verification, SCF Part B for specific area.

This Workgroup must have representation from detail design, installation/testing, data design, safety assurance and project delivery teams.

The workgroup must set up the necessary interfaces with Sydney Trains and/or other interacting projects to be notified of any infrastructure changes.

The Workgroup must consider the following in making their decision:

- The safety aspect of the decision
- The cost of rework including its impact on project schedule
- The maintainability of the changes resulting from the decision

Following the decision of the Workgroup, the appropriate group (detail designer, site installer and/or data designer) must be engaged for re-work.

The decision of the workgroup must be minuted and form part of the AMS Commissioning Work Pack.

9 Record of Geographic Data for Maintenance

Sydney Trains is responsible for operating and maintaining AMS and will need to maintain the correctness of the geographical data once it is handed over.

Geographical Data must be communicated to Sydney Trains at various stages of the AMS project delivery as per approved Asset Information Delivery Form (AIDF) for the AMS project.

To reduce overload of information and subsequent processing required by Sydney Trains, it is suggested that the SCF is communicated to Sydney Trains GIS Unit twice only.

1. Initially, the updated SCF after site audit carried out by installer to mark balise location and verify geographic data shall be communicated to Sydney Trains GIS Unit.

At this stage, Sydney Trains GIS is expected to use the SCF Part A for adding the balise locations in their database and SCF Part B for correcting/updating existing locations as required.

2. Finally, the certified SCF after Testing or commissioning of the balises shall be communicated to Sydney Trains GIS Unit. This shall also include any revised verification of geographical data conducted by the project.

At this stage, Sydney Trains GIS is expected to use the SCF Part A for confirming/updating the balise locations in their database and SCF Part B for

correcting/updating existing locations as required. The balise locations are expected to be available from GIS including WebGIS shortly after this.

The SCF must also be recorded as part of AMS Commissioning Work Pack.


Reference material only

A blank template for the Site Certification Form is given below, refer to Site Certification Form Template [DeskSite No: 5659325] for softcopy of the latest template of SCF.

DeskSite Reference: 2741164
Page 40 of 57


Appendix B. Reference Assets and Target Locations for Different AMS Functions

The Target Location and Reference Assets related to various AMS function and required entries by the designer on the Site Certification Form are shown given below. The numbers ((3) to (9) that appear in the extract of Site Certification Form below, correlate to the numbered activities in Figure 3 of this document.

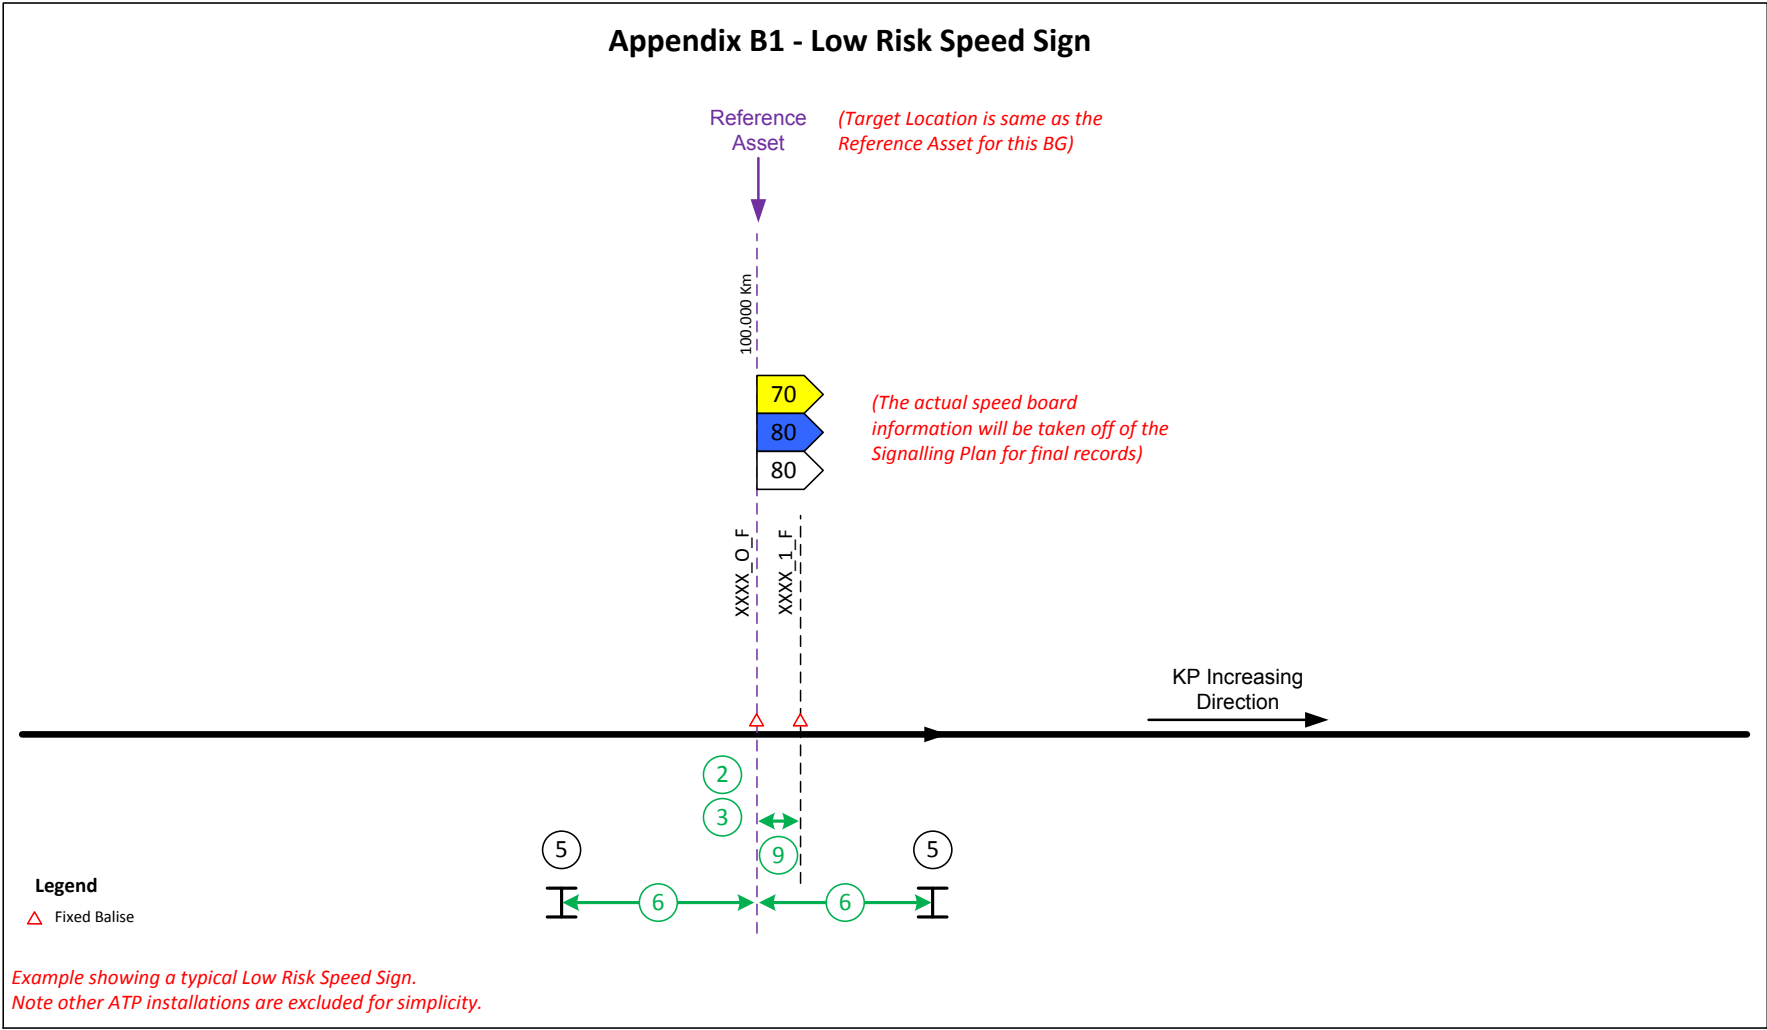

Balise Group ID	Target Location Name/ID [A]	Reference Asset Name/ID [B]	Distance from Reference Asset (m)				Distance (m) from LEU Interface Signal				Verification of Target Location [A]						Verification of Reference Asset [B]					
			to Balise N_PIG = 0		to Balise N_PIG = 1		to replacement IRJ/TU [C]		to stop location at platform [D]		Sydney Side OHWS Label	Distance (m) from Target Location to SS OHWS		Country Side OHWS Label	Distance (m) from Target Location to CS OHWS		Sydney Side OHWS Label	Distance (m) from Reference Asset to SS OHWS		Country Side OHWS Label	Distance (m) from Reference Asset to CS OHWS	
			Design	Actual	Design	Actual	Design	Actual	Design	Actual		Design	Actual		Design	Actual		Design	Actual		Design	Actual
XXXX	Same as Ref. Asset	100.000km 70-80-80	(3)		(3)+(9)											(5)	(6)		(5)	(6)		

Appendix B2 - High Risk Speed Sign

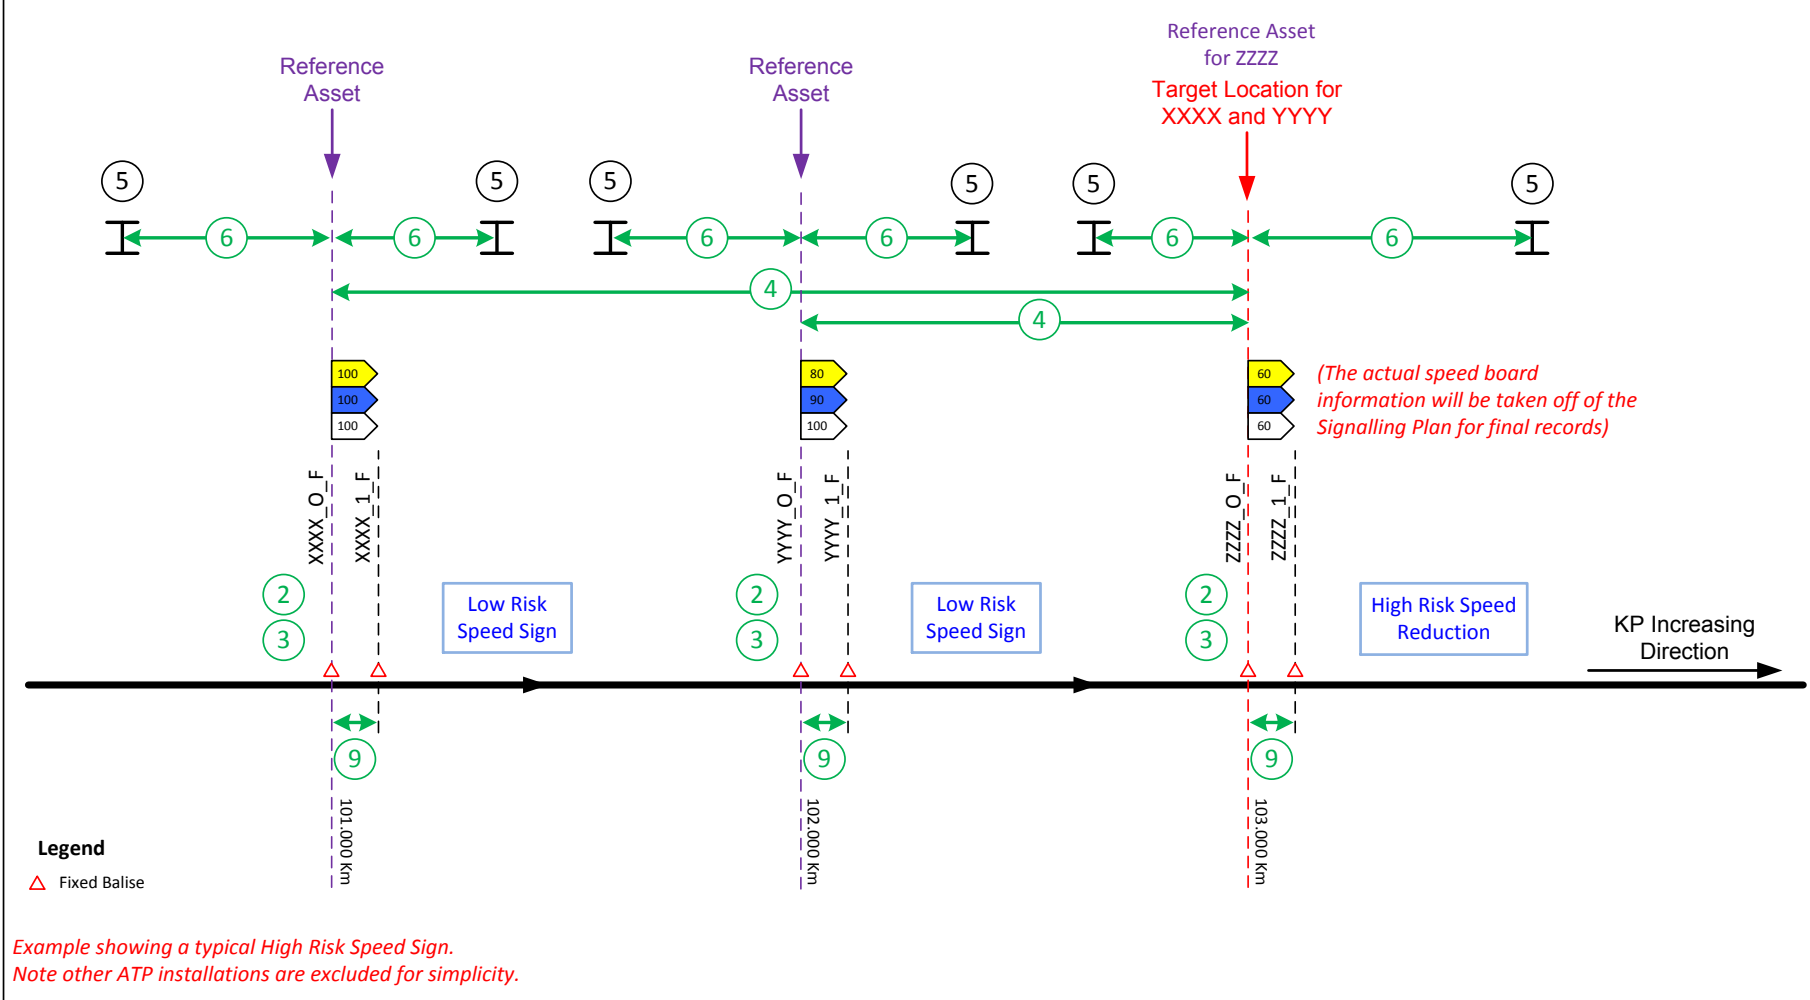


Site Specific Notes:

Same as Target Asset for BG XXXX & YYYY

Part A - Balise Installation/Test & Comissing											Part B - Geographical Data Verification											
Measuring Tool:											Measuring Tool:											
Accuracy of Tool (for measuring up to 100m):											Accuracy of Tool (for measuring up to 100m):											
Calibration Date (if applicable):											Calibration Date (if applicable):											
Measurement Date:											Measurement Date:											
Balise Group ID	Target Location Name/ID [A]	Reference Asset Name/ID [B]	Distance from Reference Asset (m)				Distance (m) from LEU Interface Signal				Verification of Target Location [A]						Verification of Reference Asset [B]					
			to Balise N_PIG = 0		to Balise N_PIG = 1		to replacement IRJ/TU [C]		to stop location at platform [D]		Sydney Side OHWS Label	Distance (m) from Target Location to SS OHWS		Country Side OHWS Label	Distance (m) from Target Location to CS OHWS		Sydney Side OHWS Label	Distance (m) from Reference Asset to SS OHWS		Country Side OHWS Label	Distance (m) from Reference Asset to CS OHWS	
			Design	Actual	Design	Actual	Design	Actual	Design	Actual		Design	Actual		Design	Actual		Design	Actual		Design	Actual
XXXX	103.000km 60-60-60	101.000km 100-100-100	(3)		(3)+(9)						(5)	(6)		(5)	(6)		(5)	(6)		(5)	(6)	
YYYY	same as BG XXXX	102.000km 80-90-100	(3)		(3)+(9)												(5)	(6)		(5)	(6)	
ZZZZ	Same as Ref. Asset	103.000km 60-60-60	(3)		(3)+(9)												#	#		#	#	

Appendix B3 - ETCS Train Stop

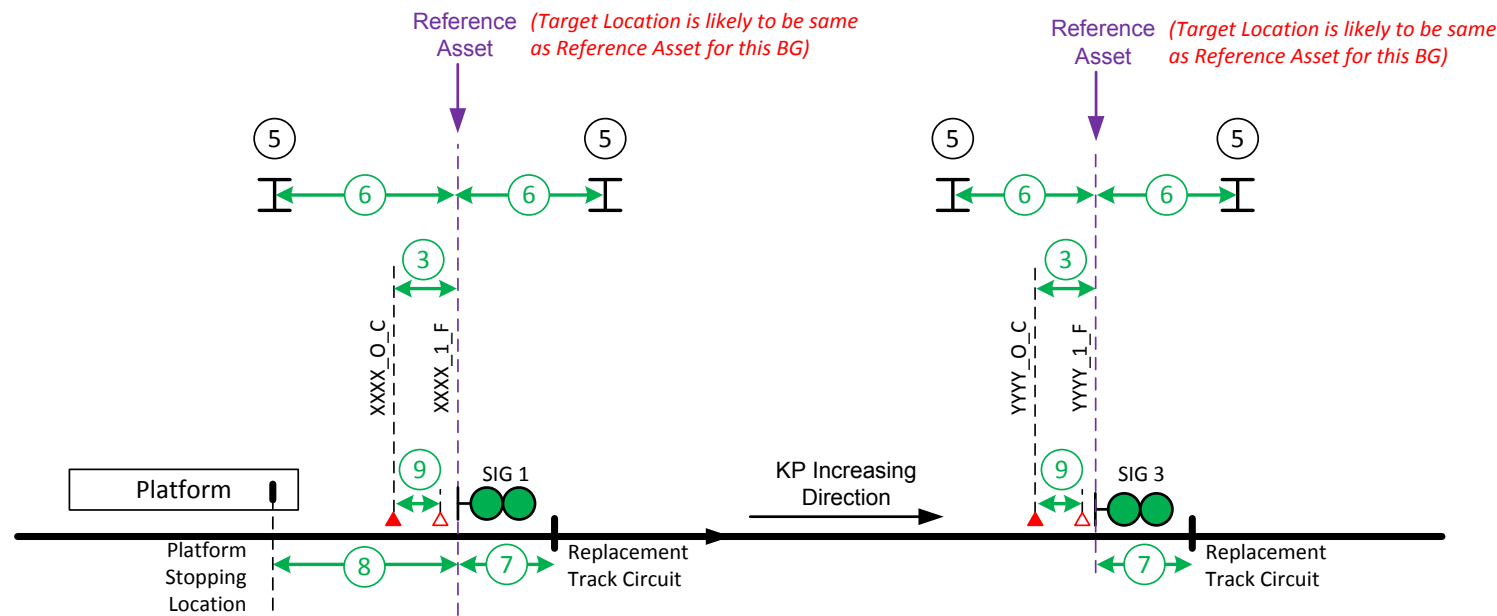


Legend
▲ Controlled Balise
△ Fixed Balise

Example showing a typical ETCS Train Stop.
Note other ATP installations and speed signs are excluded for simplicity.

Balise Group ID	Target Location Name/ID [A]	Reference Asset Name/ID [B]	Distance from Reference Asset (m)				Distance (m) from LEU Interface Signal				Verification of Target Location [A]						Verification of Reference Asset [B]					
			to Balise N_PIG = 0		to Balise N_PIG = 1		to replacement IRJ/TU [C]		to stop location at platform [D]		Sydney Side OHWS Label	Distance (m) from Target Location to SS OHWS		Country Side OHWS Label	Distance (m) from Target Location to CS OHWS		Sydney Side OHWS Label	Distance (m) from Reference Asset to SS OHWS		Country Side OHWS Label	Distance (m) from Reference Asset to CS OHWS	
			Design	Actual	Design	Actual	Design	Actual	Design	Actual		Design	Actual		Design	Actual		Design	Actual		Design	Actual
XXXX	Same as Ref. Asset	SIG 1	(3)		(3)+(9)		(7)		(8)								(5)	(6)		(5)	(6)	
YYYY	Same as Ref. Asset	SIG 3	(3)		(3)+(9)		(7)										(5)	(6)		(5)	(6)	

Appendix B4 - Buffer Stops

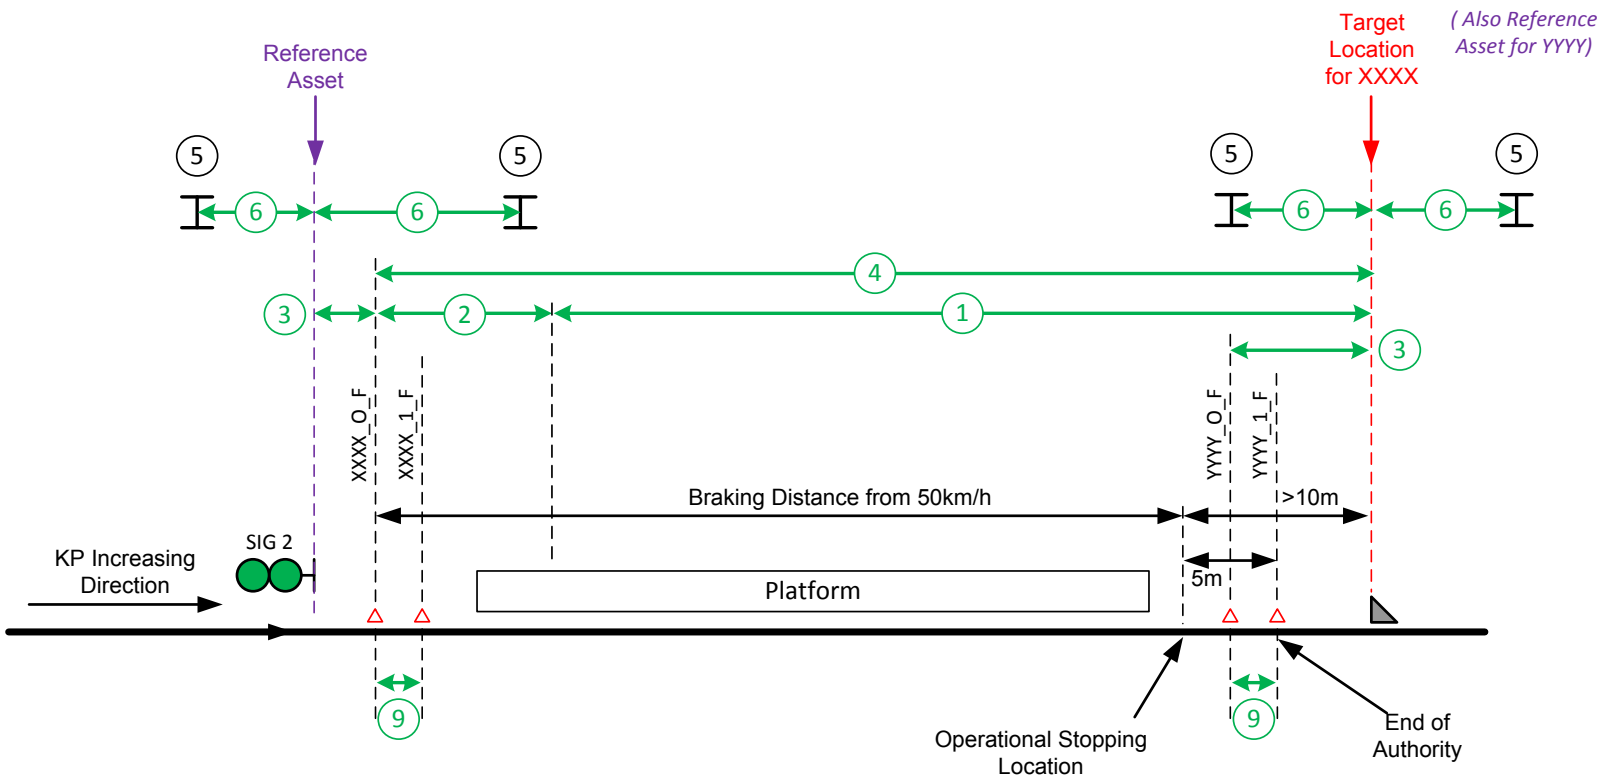

Legend
△ Fixed Balise


Example showing a typical Buffer Stop where overrun and setting back are possible.
Note other ATP installations are excluded for simplicity.

Site Specific Notes:

- * confirm distance between buffer stop and operational stopping location of Platform is more than 10m
- ** confirm distance between YYY_O_F and operational stopping location of platform is 5m
- # same as Target Location for BG XXXX

Part A - Balise Installation/Test & Comissing											Part B - Geographical Data Verification											
Measuring Tool:											Measuring Tool:											
Accuracy of Tool (for measuring up to 100m):											Accuracy of Tool (for measuring up to 100m):											
Calibration Date (if applicable):											Calibration Date (if applicable):											
Measurement Date:											Measurement Date:											
Balise Group ID	Target Location Name/ID [A]	Reference Asset Name/ID [B]	Distance from Reference Asset (m)				Distance (m) from LEU Interface Signal				Verification of Target Location [A]						Verification of Reference Asset [B]					
			to Balise N_PIG = 0		to Balise N_PIG = 1		to replacement IRJ/TU [C]		to stop location at platform [D]		Sydney Side OHWS Label	Distance (m) from Target Location to SS OHWS		Country Side OHWS Label	Distance (m) from Target Location to CS OHWS		Sydney Side OHWS Label	Distance (m) from Reference Asset to SS OHWS		Country Side OHWS Label	Distance (m) from Reference Asset to CS OHWS	
			Design	Actual	Design	Actual	Design	Actual	Design	Actual		Design	Actual		Design	Actual		Design	Actual		Design	Actual
XXXX	Buffer Stop Platform*	SIG 2	(3)		(3)+(9)						(5)	(6)		(5)	(6)		(5)	(6)		(5)	(6)	
YYYY**	Sama as Ref Asset	Buffer Stop Platform*	(3)		(3)+(9)												#	#		#	#	

Appendix B5 - Wrong Running Hazard (Level Crossing)

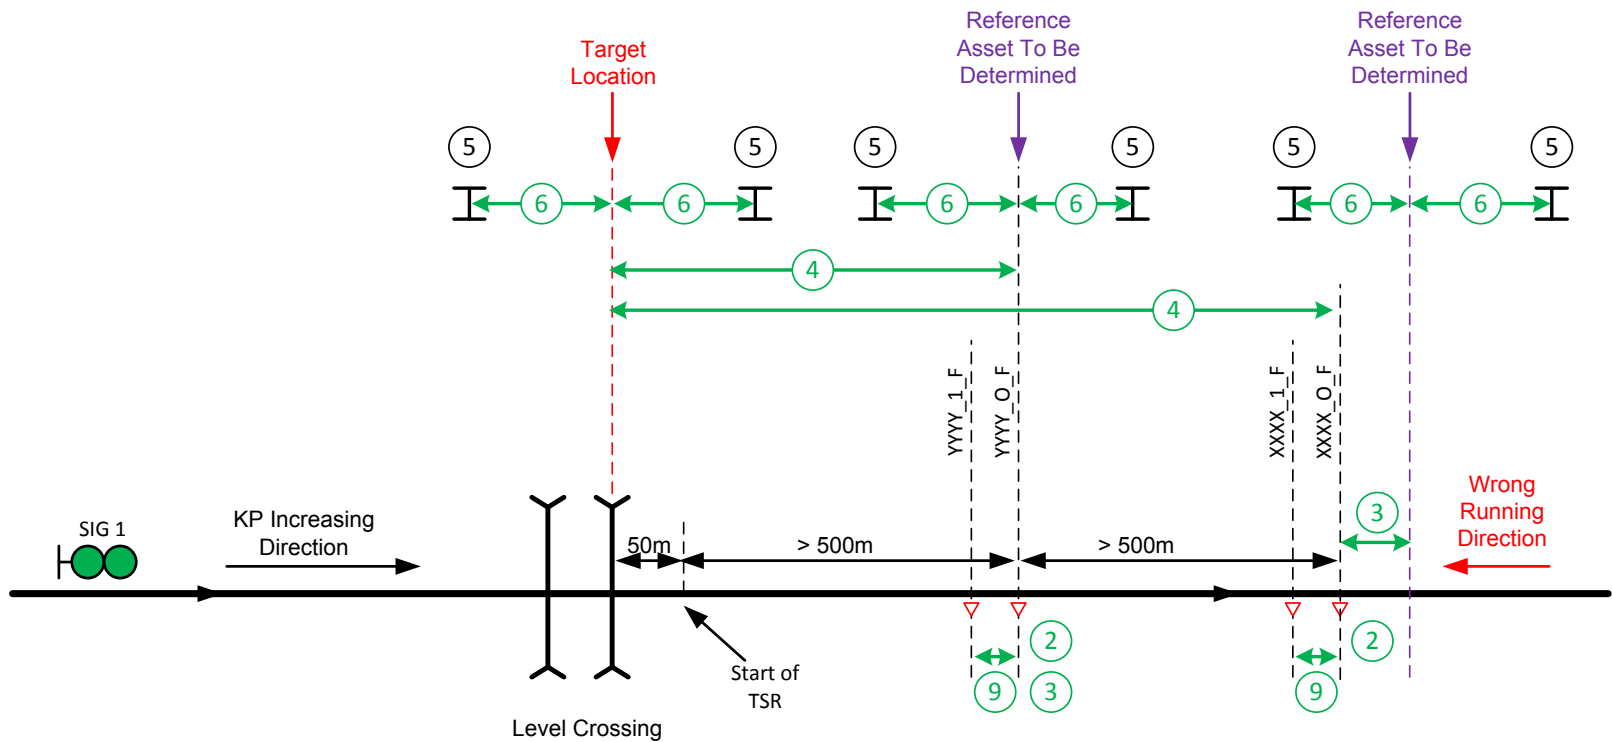


Legend
△ Fixed Balise

Example showing Wrong Running Hazard protection at a Level Crossing.
Note other ATP installations are excluded for simplicity.


Balise Group ID	Target Location Name/ID [A]	Reference Asset Name/ID [B]	Distance from Reference Asset (m)				Distance (m) from LEU Interface Signal				Verification of Target Location [A]						Verification of Reference Asset [B]					
			to Balise N_PIG = 0		to Balise N_PIG = 1		to replacement IRJ/TU [C]		to stop location at platform [D]		Sydney Side OHWS Label	Distance (m) from Target Location to SS OHWS		Country Side OHWS Label	Distance (m) from Target Location to CS OHWS		Sydney Side OHWS Label	Distance (m) from Reference Asset to SS OHWS		Country Side OHWS Label	Distance (m) from Reference Asset to CS OHWS	
			Design	Actual	Design	Actual	Design	Actual	Design	Actual		Design	Actual		Design	Actual		Design	Actual		Design	Actual
XXXX	CS Level Crossing	TBD	(3)		(3)+(9)					(5)	(6)		(5)	(6)		(5)	(6)		(5)	(6)		
YYYY	same as BG XXXX	TBD	(3)		(3)+(9)											(5)	(6)		(5)	(6)		

Appendix B6 - Re-Positioning Balises

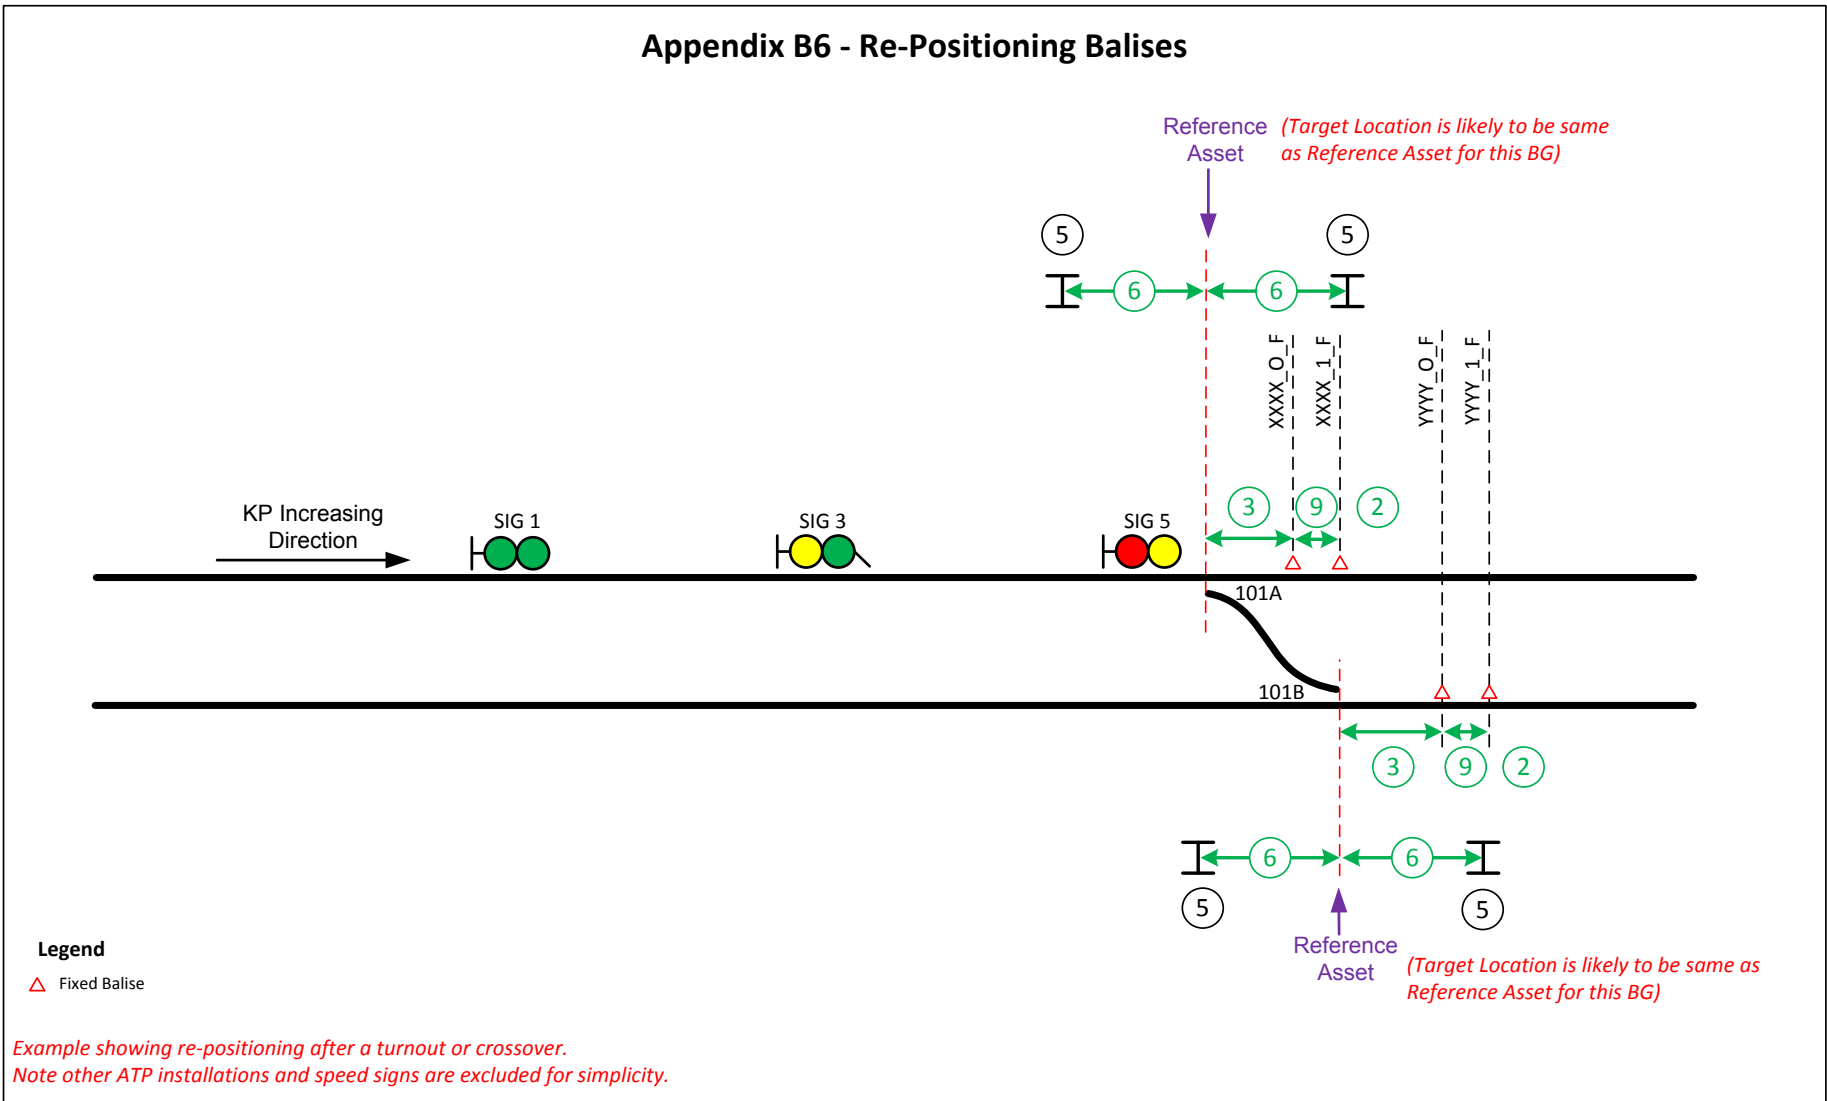


Balise Group ID	Target Location Name/ID [A]	Reference Asset Name/ID [B]	Distance from Reference Asset (m)				Distance (m) from LEU Interface Signal				Verification of Target Location [A]						Verification of Reference Asset [B]					
			to Balise N_PIG = 0		to Balise N_PIG = 1		to replacement IRJ/TU [C]		to stop location at platform [D]		Sydney Side OHWS Label	Distance (m) from Target Location to SS OHWS		Country Side OHWS Label	Distance (m) from Target Location to CS OHWS		Sydney Side OHWS Label	Distance (m) from Reference Asset to SS OHWS		Country Side OHWS Label	Distance (m) from Reference Asset to CS OHWS	
			Design	Actual	Design	Actual	Design	Actual	Design	Actual		Design	Actual		Design	Actual		Design	Actual		Design	Actual
XXXX	Same as Ref. Asset	101A	(3)		(3)+(9)											(5)	(6)		(5)	(6)		
YYYY	Same as Ref. Asset	101B	(3)		(3)+(9)											(5)	(6)		(5)	(6)		

Note that in this example the BG's are assumed to have been placed less than 100m from the toes of points. If BG's are being placed at a distance more than 100m from the toe of the point, then different reference assets will need to be selected and the toe of the point will need to be listed as a Target Location.

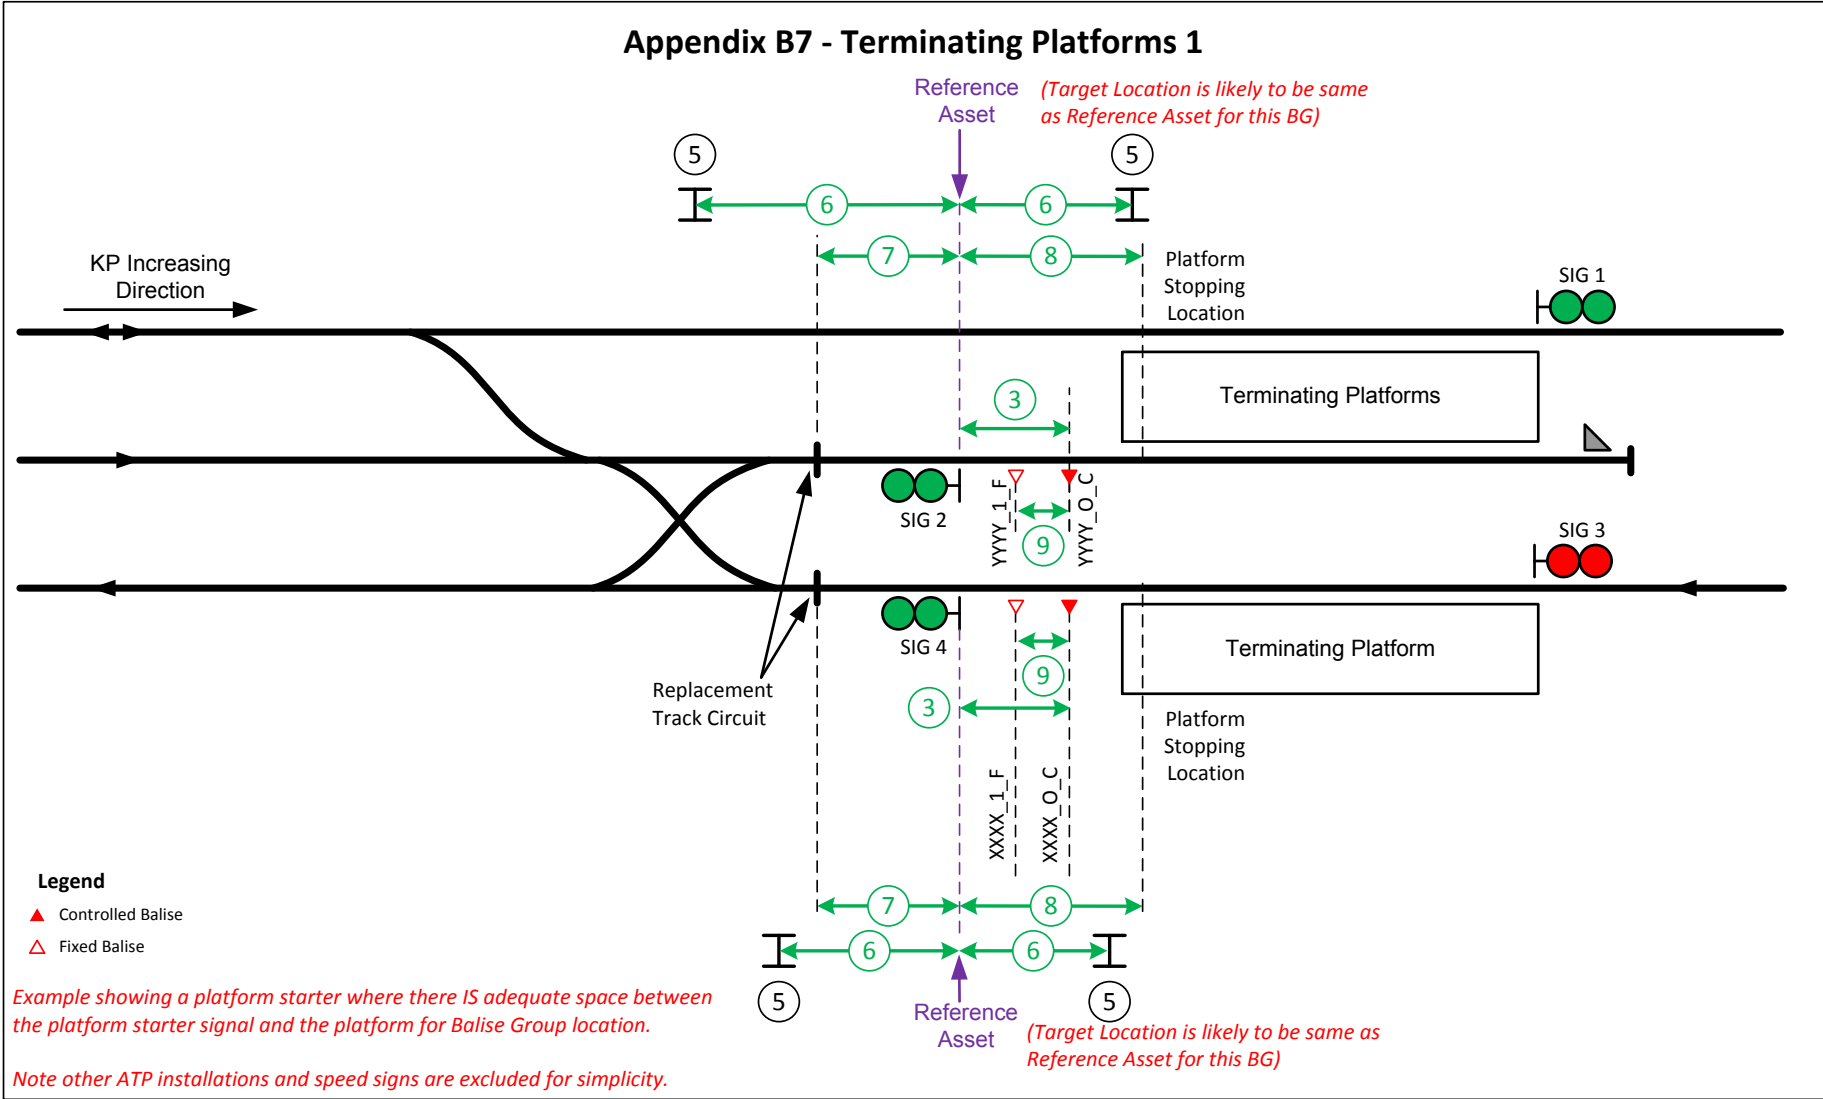


Balise Group ID	Target Location Name/ID [A]	Reference Asset Name/ID [B]	Distance from Reference Asset (m)				Distance (m) from LEU Interface Signal				Verification of Target Location [A]						Verification of Reference Asset [B]					
			to Balise N_PIG = 0		to Balise N_PIG = 1		to replacement IRJ/TU [C]		to stop location at platform [D]		Sydney Side OHWS Label	Distance (m) from Target Location to SS OHWS		Country Side OHWS Label	Distance (m) from Target Location to CS OHWS		Sydney Side OHWS Label	Distance (m) from Reference Asset to SS OHWS		Country Side OHWS Label	Distance (m) from Reference Asset to CS OHWS	
			Design	Actual	Design	Actual	Design	Actual	Design	Actual		Design	Actual		Design	Actual		Design	Actual		Design	Actual
YYYY	Same as Ref. Asset	SIG 2	(3)		(3)+(9)		(7)		(8)							(5)	(6)		(5)	(6)		
XXXX	Same as Ref. Asset	SIG 4	(3)		(3)+(9)		(7)		(8)							(5)	(6)		(5)	(6)		

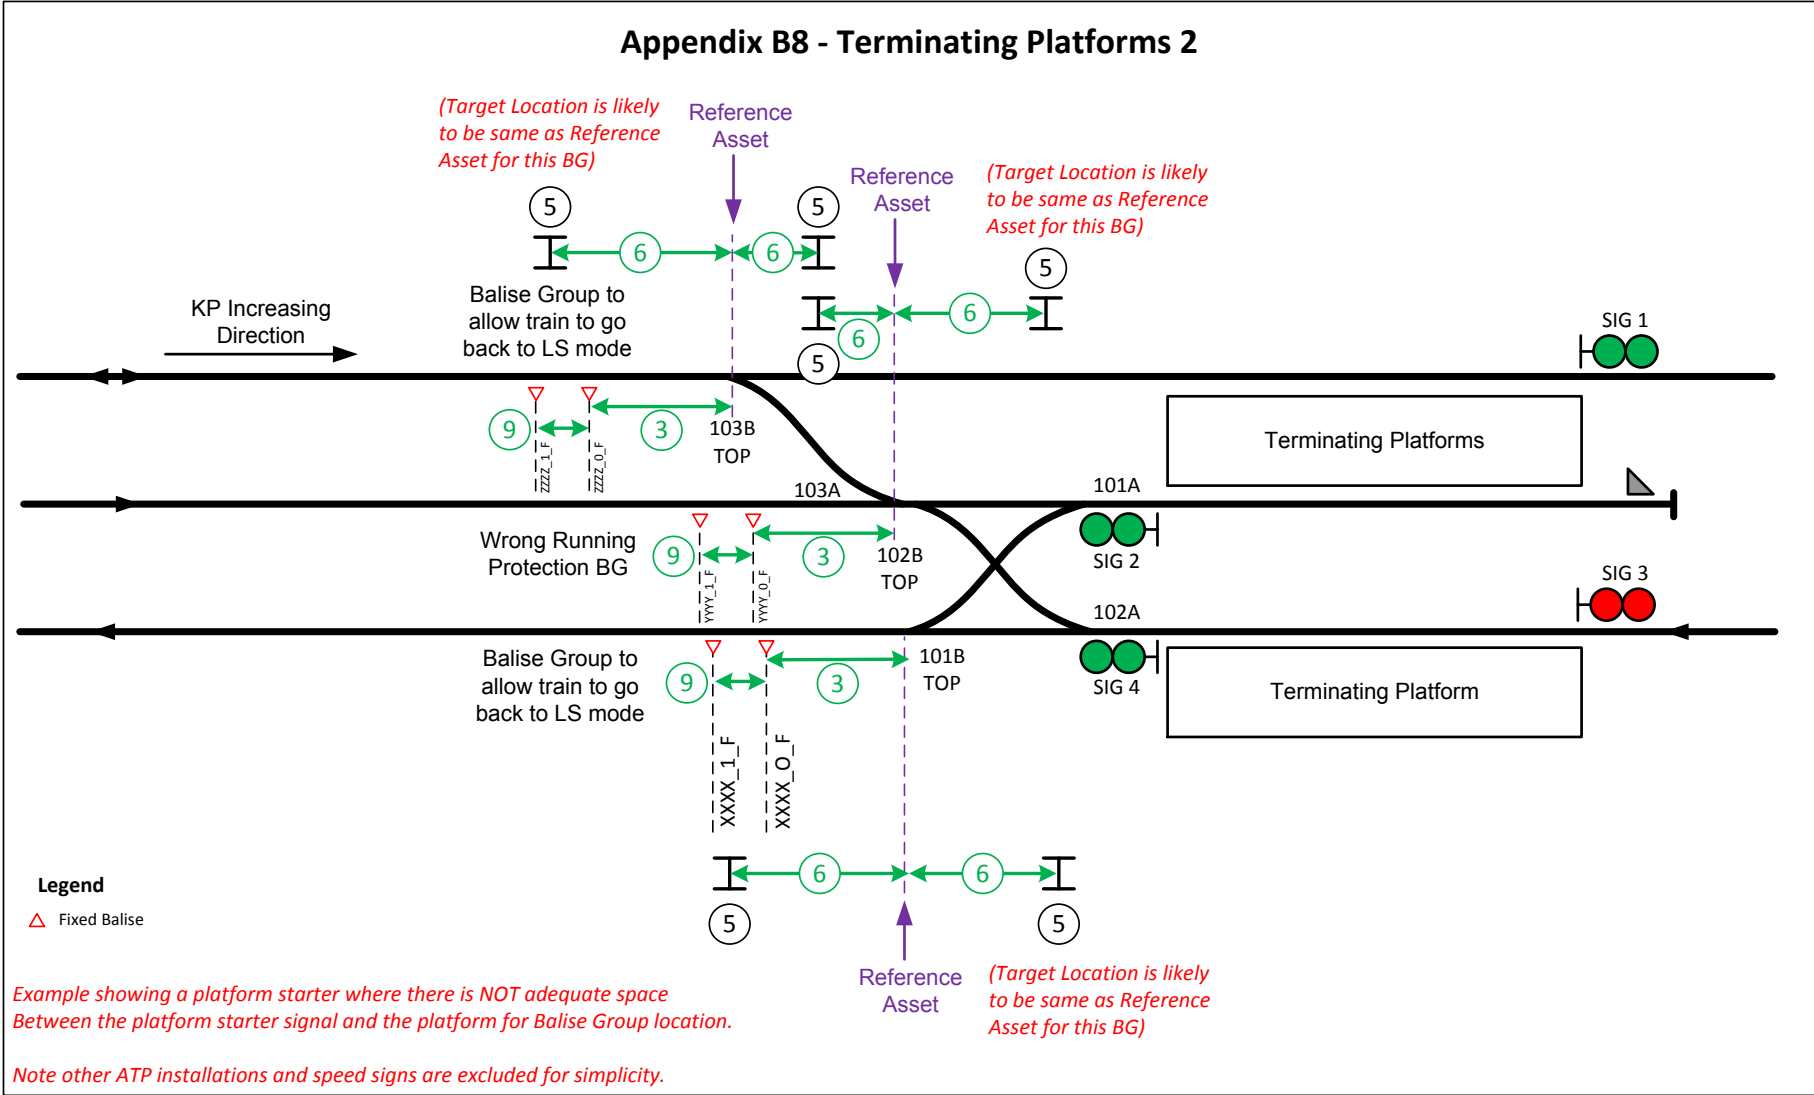


Balise Group ID	Target Location Name/ID [A]	Reference Asset Name/ID [B]	Distance from Reference Asset (m)				Distance (m) from LEU Interface Signal				Verification of Target Location [A]						Verification of Reference Asset [B]					
			to Balise N_PIG = 0		to Balise N_PIG = 1		to replacement IRJ/TU [C]		to stop location at platform [D]		Sydney Side OHWS Label	Distance (m) from Target Location to SS OHWS		Country Side OHWS Label	Distance (m) from Target Location to CS OHWS		Sydney Side OHWS Label	Distance (m) from Reference Asset to SS OHWS		Country Side OHWS Label	Distance (m) from Reference Asset to CS OHWS	
			Design	Actual	Design	Actual	Design	Actual	Design	Actual		Design	Actual		Design	Actual		Design	Actual		Design	Actual
ZZZZ	Same as Ref. Asset	103B	(3)		(3)+(9)											(5)	(6)		(5)	(6)		
YYYY	Same as Ref. Asset	103A	(3)		(3)+(9)											(5)	(6)		(5)	(6)		
XXXX	Same as Ref. Asset	101B	(3)		(3)+(9)											(5)	(6)		(5)	(6)		


Appendix B10 - High Risk Deficient Overlap

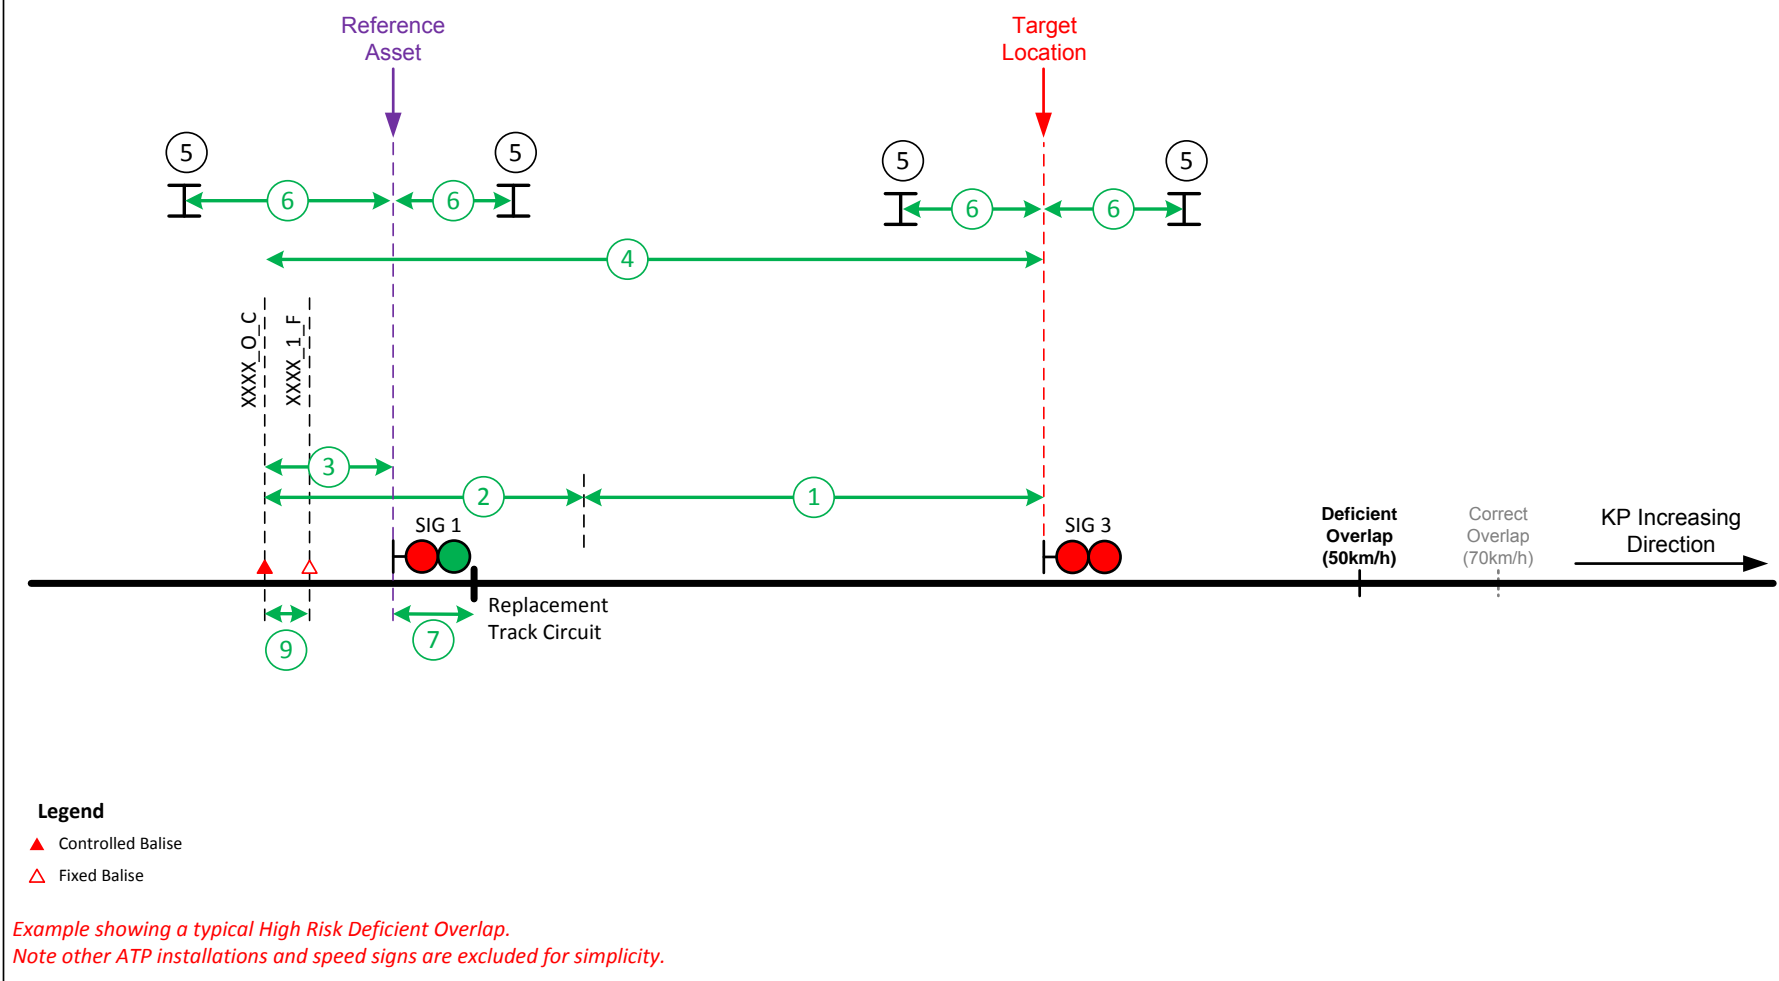

Site Specific Notes:																						
* contract detail design if on site distance is less than the design value.																						
Part A - Balise Installation/Test & Commisinging											Part B - Geographical Data Verification											
Measuring Tool:											Measuring Tool:											
Accuracy of Tool (for measuring up to 100m):											Accuracy of Tool (for measuring up to 100m):											
Calibration Date (if applicable):											Calibration Date (if applicable):											
Measurement Date:											Measurement Date:											
Balise Group ID	Target Location Name/ID [A]	Reference Asset Name/ID [B]	Distance from Reference Asset (m)				Distance (m) from LEU Interface Signal				Verification of Target Location [A]						Verification of Reference Asset [B]					
			to Balise N_PIG = 0		to Balise N_PIG = 1		to replacement IRJ/TU [C]		to stop location at platform [D]		Sydney Side OHWS Label	Distance (m) from Target Location to SS OHWS		Country Side OHWS Label	Distance (m) from Target Location to CS OHWS		Sydney Side OHWS Label	Distance (m) from Reference Asset to SS OHWS		Country Side OHWS Label	Distance (m) from Reference Asset to CS OHWS	
			Design	Actual	Design	Actual	Design	Actual	Design	Actual		Design	Actual		Design	Actual		Design	Actual		Design	Actual
XXXX	SIG 3	SIG 1	(3)		(3)+(9)		(7)*				(5)	(6)		(5)	(6)		(5)	(6)		(5)	(6)	

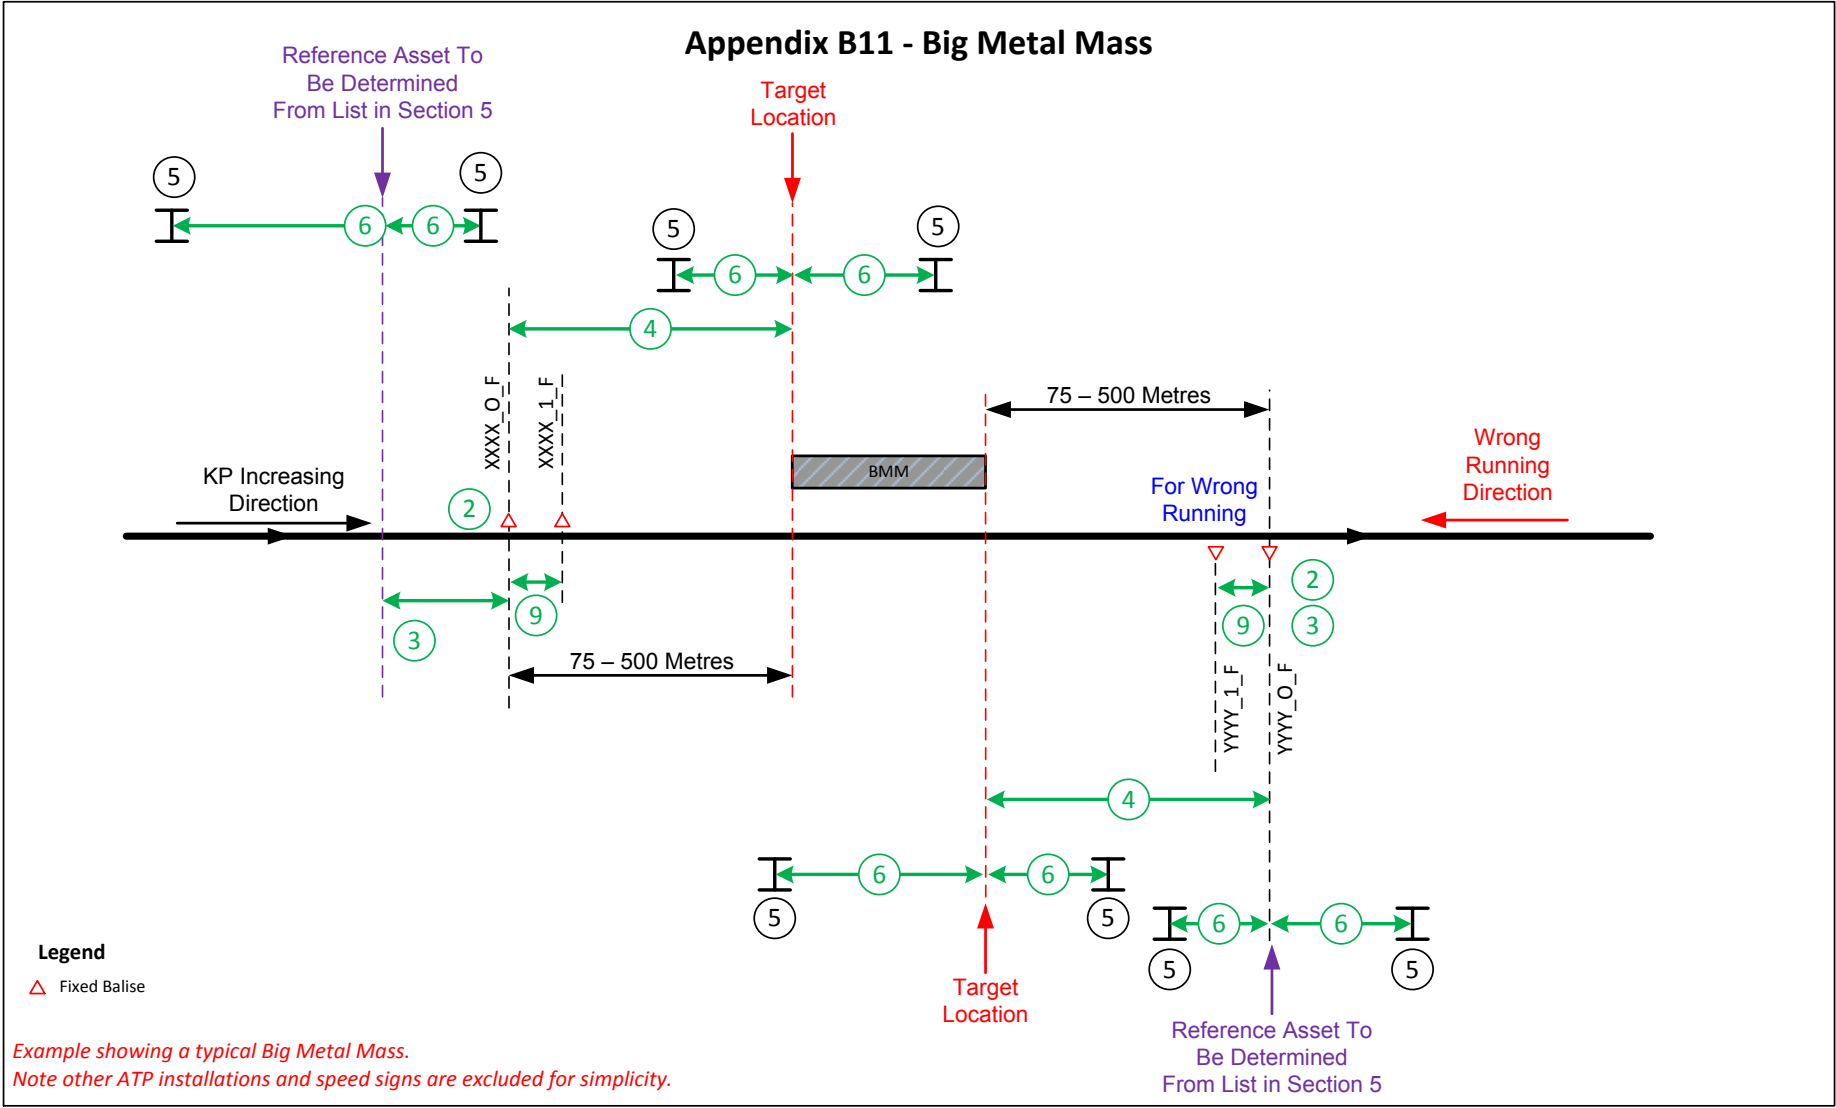


Balise Group ID	Target Location Name/ID [A]	Reference Asset Name/ID [B]	Distance from Reference Asset (m)				Distance (m) from LEU Interface Signal				Verification of Target Location [A]						Verification of Reference Asset [B]					
			to Balise N_PIG = 0		to Balise N_PIG = 1		to replacement IRJ/TU [C]		to stop location at platform [D]		Sydney Side OHWS Label	Distance (m) from Target Location to SS OHWS		Country Side OHWS Label	Distance (m) from Target Location to CS OHWS		Sydney Side OHWS Label	Distance (m) from Reference Asset to SS OHWS		Country Side OHWS Label	Distance (m) from Reference Asset to CS OHWS	
			Design	Actual	Design	Actual	Design	Actual	Design	Actual		Design	Actual		Design	Actual		Design	Actual		Design	Actual
XXXX	SS BMM	TBD	(3)		(3)+(9)					(5)	(6)		(5)	(6)		(5)	(6)		(5)	(6)		
YYYY	CS BMM	TBD	(3)		(3)+(9)					(5)	(6)		(5)	(6)		(5)	(6)		(5)	(6)		

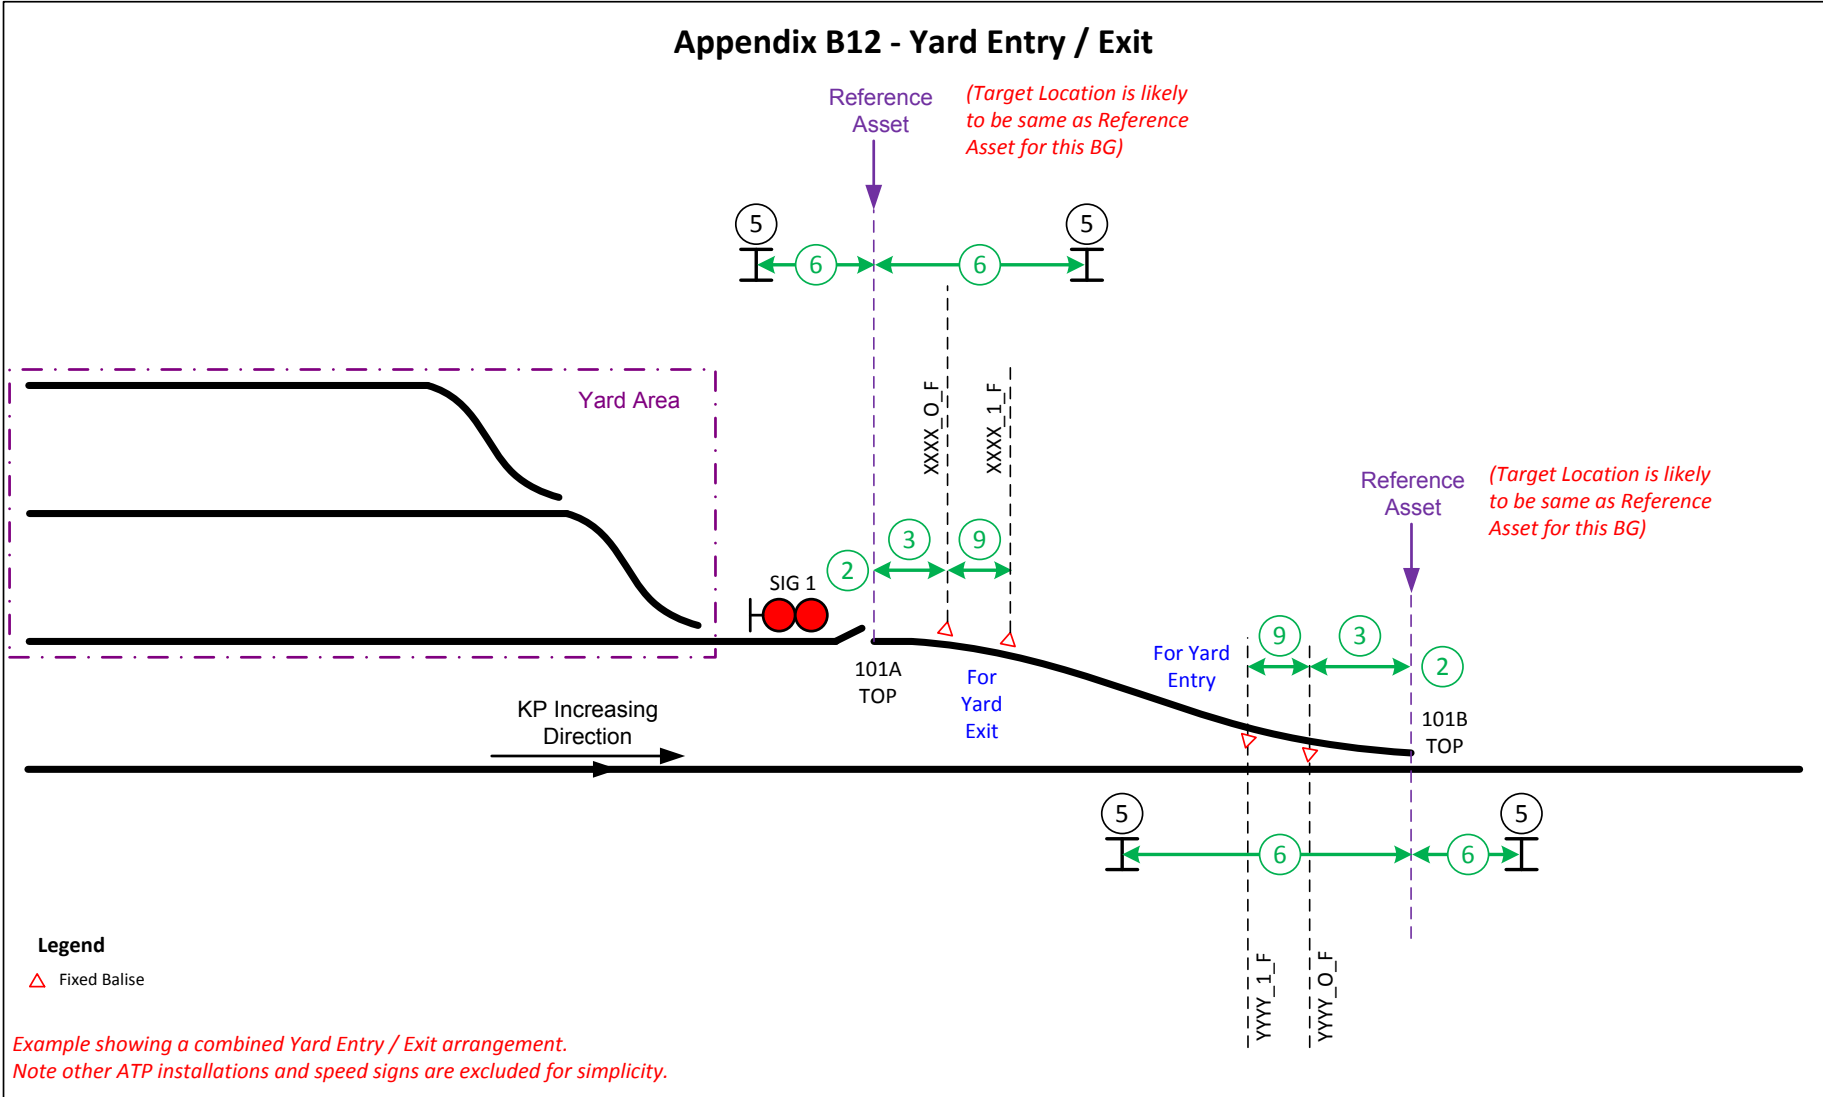

Balise Group ID	Target Location Name/ID [A]	Reference Asset Name/ID [B]	Distance from Reference Asset (m)				Distance (m) from LEU Interface Signal				Verification of Target Location [A]						Verification of Reference Asset [B]					
			to Balise N_PIG = 0		to Balise N_PIG = 1		to replacement IRJ/TU [C]		to stop location at platform [D]		Sydney Side OHWS Label	Distance (m) from Target Location to SS OHWS		Country Side OHWS Label	Distance (m) from Target Location to CS OHWS		Sydney Side OHWS Label	Distance (m) from Reference Asset to SS OHWS		Country Side OHWS Label	Distance (m) from Reference Asset to CS OHWS	
			Design	Actual	Design	Actual	Design	Actual	Design	Actual		Design	Actual		Design	Actual		Design	Actual		Design	Actual
XXXX	Same as Ref. Asset	101A	(3)		(3)+(9)											(5)	(6)		(5)	(6)		
YYYY	Same as Ref. Asset	101B	(3)		(3)+(9)											(5)	(6)		(5)	(6)		


Appendix B13 - Permanent Stop Signs / Fixed Red Signals

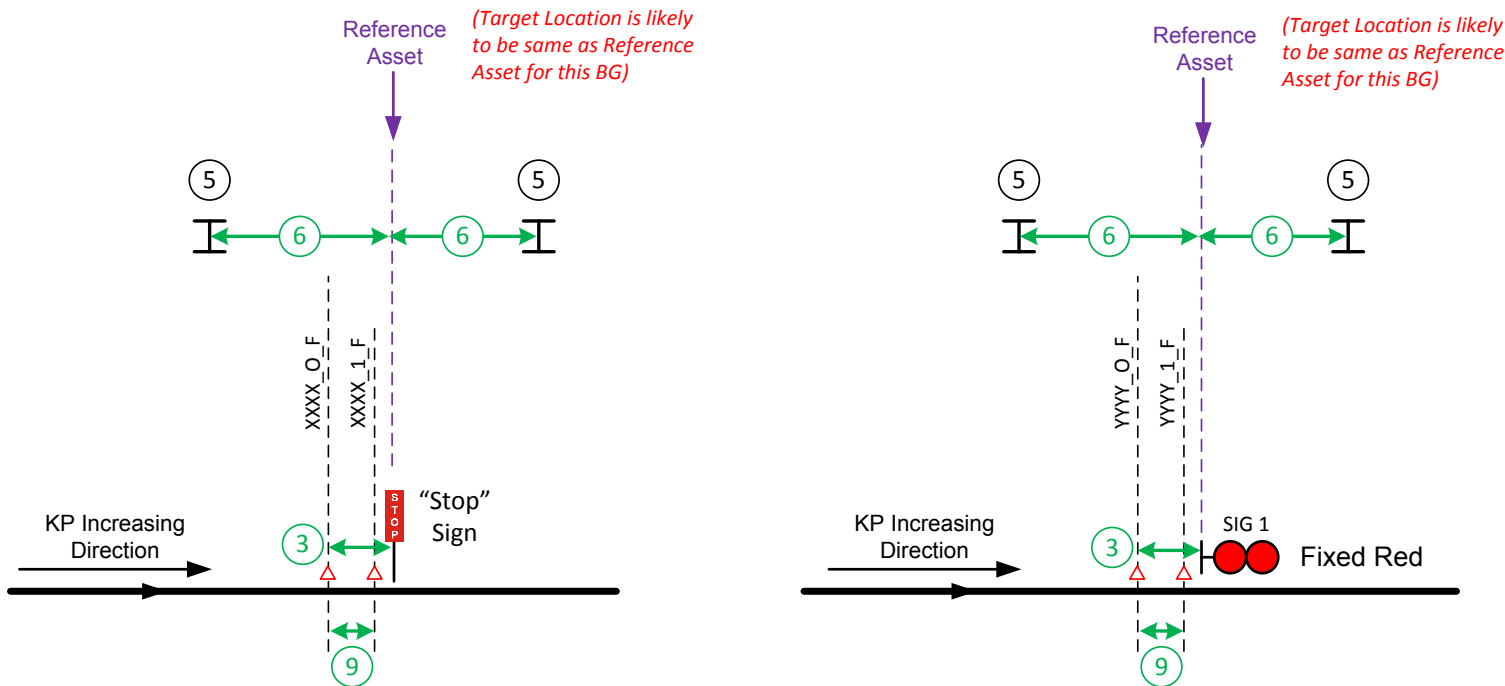

Legend
△ Fixed Balise

Examples showing a “Stop Sign” and Fixed Red signal.
Note other ATP installations and speed signs are excluded for simplicity.

Balise Group ID	Target Location Name/ID [A]	Reference Asset Name/ID [B]	Distance from Reference Asset (m)				Distance (m) from LEU Interface Signal				Verification of Target Location [A]						Verification of Reference Asset [B]					
			to Balise N_PIG = 0		to Balise N_PIG = 1		to replacement IRJ/TU [C]		to stop location at platform [D]		Sydney Side OHWS Label	Distance (m) from Target Location to SS OHWS		Country Side OHWS Label	Distance (m) from Target Location to CS OHWS		Sydney Side OHWS Label	Distance (m) from Reference Asset to SS OHWS		Country Side OHWS Label	Distance (m) from Reference Asset to CS OHWS	
			Design	Actual	Design	Actual	Design	Actual	Design	Actual		Design	Actual		Design	Actual		Design	Actual		Design	Actual
XXXX	Same as Ref. Asset	STOP SIGN	(3)		(3)+(9)											(5)	(6)		(5)	(6)		
YYYY	Same as Ref. Asset	SIG 1	(3)		(3)+(9)											(5)	(6)		(5)	(6)		

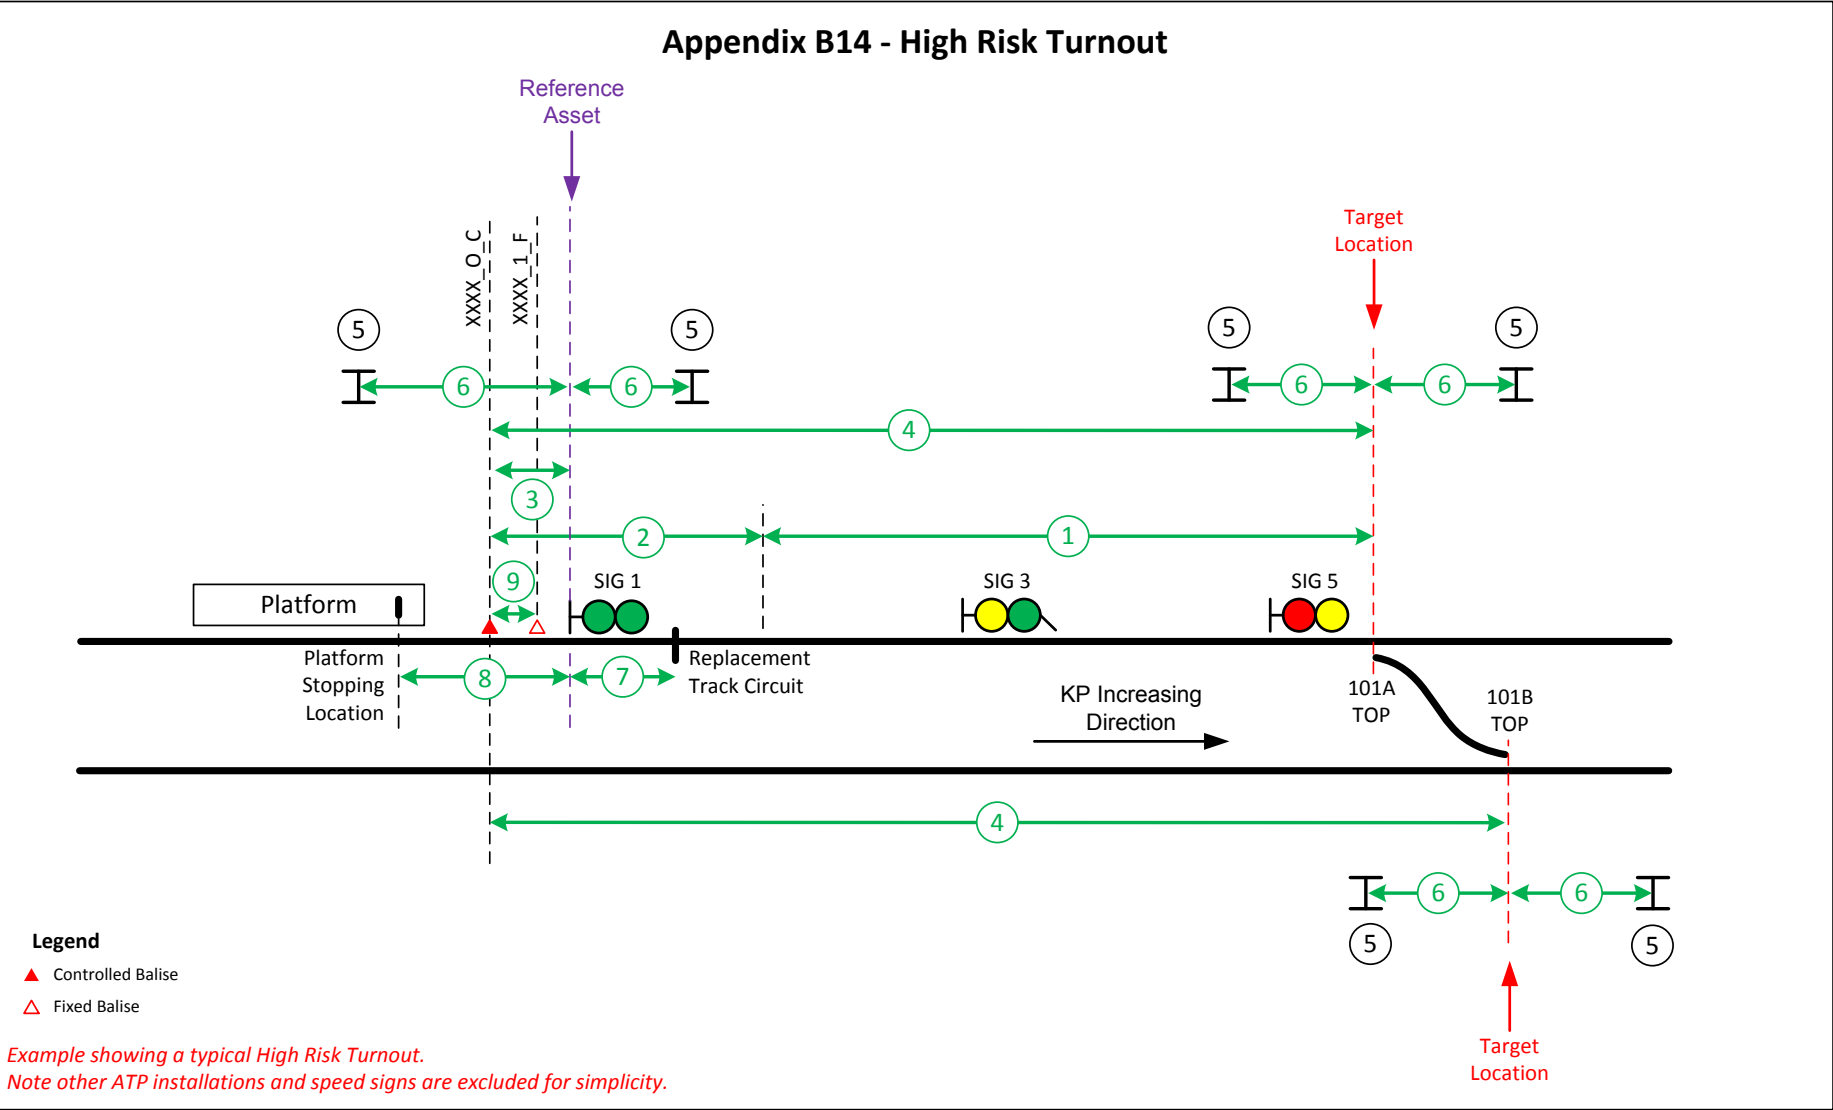

Site Specific Notes:																						
* contact detail design if on site distance is less than the design value.																						
** 101B is also a Target Location for BG XXXX and location of 101B must be site certified																						
Part A - Balise Installation/Test & Commisning											Part B - Geographical Data Verification											
Measuring Tool:											Measuring Tool:											
Accuracy of Tool (for measuring up to 100m):											Accuracy of Tool (for measuring up to 100m):											
Calibration Date (if applicable):											Calibration Date (if applicable):											
Measurement Date:											Measurement Date:											
Balise Group ID	Target Location Name/ID [A]	Reference Asset Name/ID [B]	Distance from Reference Asset (m)				Distance (m) from LEU Interface Signal				Verification of Target Location [A]						Verification of Reference Asset [B]					
			to Balise N_PIG = 0		to Balise N_PIG = 1		to replacement IRJ/TU [C]		to stop location at platform [D]		Sydney Side OHWS Label	Distance (m) from Target Location to SS OHWS		Country Side OHWS Label	Distance (m) from Target Location to CS OHWS		Sydney Side OHWS Label	Distance (m) from Reference Asset to SS OHWS		Country Side OHWS Label	Distance (m) from Reference Asset to CS OHWS	
			Design	Actual	Design	Actual	Design	Actual	Design	Actual	Design	Actual		Design	Actual		Design	Actual		Design	Actual	
XXXX	101A	SIG 1	(3)		(3)+(9)		(7)*		(8)		(5)	(6)		(5)	(6)		(5)	(6)		(5)	(6)	
	101B**										(5)	(6)		(5)	(6)							

Appendix C. RFI for GIS Extract

C1. RFI Structure

The specifics of the RFI will depend on the requirements identified at the time of request. The following must be included as a minimum:

- Document control information containing unique ID for RFI, details of RFI author/owner and request date
- Overview of the request including;
 1. Tracks for which location data is required, e.g. Up Main North
 2. Extends of geographic area, e.g. Gosford to Wyong
- Clearly identify the deliverables, as a minimum the following must be provided:
 1. Standard GIS Extract, this refers to an agreed set of POIs and specific set of attributes per POI as detailed in appendix C2,
 2. Any non-standard request, these can be as follows;
 - Additional POI,
 - Additional Attribute for an existing POI,
 - Additional supporting material, e.g. Map book of the area to provide a visual interface to the data. This is not required if the designer has access to WebGIS

Note that GIS may not be able to meet these non-standard requests.

- Provide a schedule by which the input data is required
- Work order number or other appropriate means for covering Sydney Trains cost of data extraction
- Contact details of interface manager and/or point of contact for this RFI

C2: Content of Standard GIS Extract

- File Format: Microsoft Excel file
- Included POIs:
 - Signals
 - Mechanical Trainstops
 - Permanent Stop Signs
 - Speed Signs
 - Buffer Stops
 - Km Posts

- OHWS
- Half Km Posts
- Toe of Points
- Edge of Level/Pedestrian Crossings (data can be incomplete for this POI)
- Platform Edge (data can be incomplete for this POI)
- Car Markers (data can be incomplete for this POI)
- Minimum attributes provided for each POI:
 - Unique GIS ID
 - Name/label of the POI
 - Track Base Code
 - Track Name
 - Kilometrage Reference (as per Survey Alignment database)
 - Rolling distance (distance from the start of track base code)
- Report any known discrepancies in data to AMS such that other measures can be arranged, e.g. POI requested by TfNSW is not available etc.