

# Speed Camera Programs: 2017 Annual Review

Author:Centre for Road SafetyDate:May 2018Version:0.6Division:Freight, Strategy and Planning

# Contents

1	1.1	tive summary How NSW reviews speed cameras	5
	1.2	Key findings	
2		Iction	
	2.1 2.2	The NSW Speed Camera Strategy Annual review of NSW speed camera programs	9 0
	2.2	The speeding problem	
	2.4	Safety benefits of camera enforcement	
	2.5	Transparent management of NSW speed camera programs	
3	Tunon	of speed camera programs in NSW	
3	3.1	Fixed speed cameras	
	3.2	Red-light speed cameras	
	3.3	Mobile speed cameras	
	3.4	Average speed (point-to-point) cameras	
4	Roviov	v Criteria for reviewing speed cameras	13
т	4.1	Measuring the performance of speed camera programs	
	4.2	Measuring the performance of individual speed cameras	
5	Data c	ontext	15
0	5.1	Road crash data	
	5.2	Injury severity	
6	Data p	arameters	17
Ŭ	6.1	Five years of data	
	6.2	Time periods analysed	
	6.3	Crashes selected for analysis	
	6.4	State-wide crash data	
	6.5	State-wide comparison traffic volume data	
	6.6	State-wide speed survey data	
	6.7	Infringement data	19
7	Reviev	v methodology	20
	7.1	Fixed speed camera locations	20
	7.2	Red-light speed camera locations	24
	7.3	Mobile speed camera locations	
	7.4	Average speed enforcement lengths	
8	Result	s and discussion	
	8.1	Fixed speed cameras	
	8.2	Red-light speed cameras	
	8.3	Mobile speed cameras	
	8.4	Average speed (point-to-point) cameras	

# Appendices

A.	NSW fixed speed camerasA1
	Most infringing locations
	Warning mode locations
	High risk locations
В.	NSW red-light speed camerasB1
	Most infringing locations
C.	NSW mobile speed camerasC1
D.	NSW heavy vehicle average speed camerasD1

# **1** Executive summary

The purpose of the Annual NSW Speed Camera Review is to monitor speed cameras in NSW to ensure they are having a positive road safety effect. This report was prepared in early 2018, using data up until the end of the 2016 calendar year.

The NSW Centre for Road Safety (CRS) has reviewed all NSW speed cameras against the criteria in the *NSW Speed Camera Strategy 2012* (the Strategy), culminating in this report. This document is the sixth in a series of annual reports that addresses the recommendation from the 2011 NSW Auditor-General's audit of speed cameras, to provide the community with information about the road safety impact of speed cameras.

This report has identified that overall trauma reductions at fixed, red-light and average speed camera locations have exceeded the trauma reductions observed across NSW since those cameras were installed. In addition, the mobile speed camera program continues to deliver road safety benefits, compared to the period before the program was reintroduced onto NSW roads.

If an individual camera is found not to have a positive road safety effect, CRS will consider alternative road safety measures at the location. The findings from this annual review also guide future speed enforcement priorities.

### 1.1 How NSW reviews speed cameras

The review criteria for speed camera programs and individual camera locations are provided within the Strategy. Broadly speaking, review recommendations are measured by two key criteria:

- Reduction in casualty crashes and casualties, and
- Reduction in infringement rates.

At least five years of crash and casualty data are required to make an assessment of a camera's safety benefit. The criteria and methodology are outlined within sections 4 and 7 of this review.

### 1.1.1 Fixed and red-light speed cameras

Most fixed speed cameras, and approximately half of red-light speed cameras, have now been installed for at least 5 years. As a result, there is sufficient data available to reliably assess road safety benefits, and this review has developed recommendations to retain, monitor or review these cameras.

Where there is not yet 5 years of post-installation data available, recommendations have not been made.

### 1.1.2 Mobile speed cameras

Because mobile speed cameras are designed to generally deter speeding across the road network, and because they move regularly, the annual review examines crash and speed data for the entire state, rather than individual mobile speed camera locations.

### 1.1.3 Average speed (point-to-point) cameras

There are now 16 average speed (point-to-point) enforcement lengths where 5 years of data are available, and the program continues to deliver a road safety benefit.

There are no changes recommended to the average speed camera program.

### 1.2 Key findings

### 1.2.1 Fixed speed camera program

Program size as at 31 December 2016: 138 cameras at 109 locations<sup>1</sup>

Median camera installation date: 29 April 2003

Overall, there has been a reduction in fatal crashes and injury crashes at fixed speed camera locations since the cameras were installed, compared with the five year period prior to installation.

Specifically, at fixed speed camera locations there has been a:

- 32 per cent reduction in casualty crashes
- 85 per cent reduction in fatalities
- 38 per cent reduction in injuries.

The reduction in fatalities and injuries represents a saving of \$546 million to the community.

The trauma reductions at camera locations compare to the following rates of change observed across NSW over the same period:

- 8 per cent reduction in casualty crashes
- 36 per cent reduction in fatalities
- 10 per cent reduction in injuries.

It should also be considered, alongside the crash data outlined above, that there has also been a notable increase in traffic volumes. Over the periods that fixed digital speed cameras have been reviewed within this report, there has been an 18 per cent increase in traffic volume across NSW.<sup>2</sup>

### Individual Camera Locations

Of the 109 fixed speed camera locations, seven locations operate in warning mode and five locations are high risk sites located in tunnels. Recommendations are not provided for these 12 locations.

For the remaining 97 fixed speed camera locations:

- 77 locations were found to offer continued safety benefits,
- 4 locations were identified for ongoing monitoring in future years,
- 3 locations had insufficient data to review, and
- 13 locations were ineligible for review.

No fixed digital speed camera locations were identified for review.

<sup>&</sup>lt;sup>1</sup> Of the 109 fixed speed camera locations, seven locations operate in warning mode and five locations are high risk sites located in tunnels. Recommendations are not provided for these warning mode and high risk locations.

<sup>&</sup>lt;sup>2</sup> Estimates for Vehicle Kilometres Travelled (VKT) have been modelled by BITRE, primarily from data compiled by the Survey of Motor Vehicle Usage (ABS 2015).

None of the 10 highest infringing fixed speed camera locations were identified in this review for ongoing monitoring.

### 1.2.2 Red-light speed camera program

Program size as at 31 December 2016: 191 cameras at 171 intersections Median camera installation date: 27 June 2011

Overall, there has been a reduction in fatal crashes and injury crashes at red-light speed camera locations since the cameras were installed, compared with the five year period prior to installation.

Specifically, at red-light speed camera locations there has been a:

- 33 per cent reduction in fatal and serious injury crashes
- 54 per cent reduction in fatalities
- 35 per cent reduction in serious injuries
- 49 per cent reduction in pedestrian casualties.

The reduction in fatalities and serious injuries represents a saving of \$124 million to the community.

The trauma reductions at camera locations compare to the following rates of change observed across NSW over the same period:

- 2 per cent increase in fatal and serious injury crashes
- 18 per cent reduction in fatalities
- 2 per cent increase in serious injuries
- 24 per cent reduction in pedestrian casualties.

It should also be noted, alongside the crash data outlined above, that there has also been a notable increase in traffic volumes. Over the period that red-light speed cameras have been reviewed within this report, there has been a 9 per cent increase in traffic volume across NSW.<sup>3</sup>

### Individual Camera Locations

Of the 171 red-light speed camera locations, 80 locations have not yet been installed for 5 years. Recommendations are not provided for these 80 locations.

For the remaining 91 locations:

- 69 locations were found to offer continued safety benefits,
- 21 locations were identified for ongoing monitoring in future years, and
- 1 location was identified for review.

None of the 10 highest infringing red-light speed camera locations were identified for review or ongoing monitoring.

<sup>&</sup>lt;sup>3</sup> Estimates for Vehicle Kilometres Travelled (VKT) have been modelled by BITRE, primarily from data compiled by the Survey of Motor Vehicle Usage (ABS 2015).

### 1.2.3 Mobile speed camera program

### Program size as at 31 Dec 2016: 7,000 hrs of enforcement / month at 640 locations

Annual speed survey data indicate that the mobile speed camera program continues to deliver road safety benefits, compared to results prior to the reintroduction of the mobile speed camera program in 2010.

NSW speed survey data for the last eight years shows a reduced proportion of light vehicles exceeding the speed limit, across all speed zones. Comparing the 2016 speed survey results against those from 2015, there are a decreased proportion of light vehicles exceeding the speed limit in most NSW speed zones measured.

For heavy vehicles, comparing the 2016 results against the 2015 results identifies a decreased proportion of heavy vehicles exceeding the speed limit for approximately two thirds of the speed zones measured.

In 2016, the number of infringements fell by about half overall, from around 4,000 infringements per month at the end of 2015 to around 2,000 infringements per month at the end of 2016. Over 99 per cent of vehicles passing mobile speed cameras are not infringed for speeding, and this high rate of compliance has remained consistent since 2010 when the program was reintroduced in NSW.

The mobile speed camera program continues to deliver road safety benefits when compared to the most recent period without the program in operation, and there has been a 10 per cent increase in traffic volume across NSW since the mobile speed camera program was reintroduced in 2010.

### 1.2.4 Average speed (point-to-point) speed camera program

### Program size as at 31 December 2016: 25 lengths

### Median camera installation date: 16 December 2011

Overall, there has been a reduction in fatal crashes and serious injury crashes on NSW heavy vehicle average speed enforcement lengths since those lengths were installed, compared with the five year period prior to installation.

Across heavy vehicle average speed enforcement lengths, there has been a:

- 12 per cent reduction in casualty crashes involving a heavy vehicle
- 19 per cent reduction in fatalities from crashes involving heavy vehicles
- 8 per cent reduction in serious injuries from crashes involving heavy vehicles.

The reduction in fatalities and serious injuries represents a saving of \$61 million to the community.

It should also be noted, alongside the crash data outlined above, that there has been a notable increase in heavy vehicle traffic volumes. Over the periods that average speed enforcement lengths have been reviewed within this report, there has been a 9 per cent increase in heavy vehicle volumes across NSW.<sup>4</sup>

No average speed camera lengths were identified for further review or removal. CRS will continue to monitor the heavy vehicle average speed enforcement program.

<sup>&</sup>lt;sup>4</sup> Estimates for Vehicle Kilometres Travelled (VKT) have been modelled by BITRE, primarily from data compiled by the Survey of Motor Vehicle Usage (ABS 2015).

# 2 Introduction

### 2.1 The NSW Speed Camera Strategy

The *NSW Speed Camera Strategy* (the Strategy) provides an integrated framework for speed enforcement in NSW, and aims to improve the transparency of NSW speed camera programs. The Strategy was developed in consultation with the NSW Police Force and NRMA Motoring and Services, and reinforces the Government's commitment to reducing fatalities and serious injuries on NSW roads.

The NSW Auditor-General has found that speed cameras change driver behaviour and improve road safety.<sup>5</sup> The Auditor-General also recommended that speed camera performance information be regularly made available to the public. One of the key actions in the Strategy is therefore an annual review of speed camera programs against defined criteria.

### 2.2 Annual review of NSW speed camera programs

This annual review monitors automated speed enforcement in NSW. This includes fixed speed cameras, red-light speed cameras, mobile speed cameras and average speed (point-to-point) cameras. However, this does not include the speed enforcement conducted by the NSW Police Force.

This report was prepared in early 2018, using data up until the end of the 2016 calendar year. Detailed analysis for NSW speed camera locations is provided within Appendices A - D of this report.

However, detailed analysis is not included for fixed speed cameras operating in warning mode.<sup>6</sup> Crash and infringement data in instead provided for these cameras, within Appendix A. Detailed analysis is also not included for fixed speed cameras at five high risk tunnel locations. Speed cameras were generally installed at these locations when the tunnel was constructed, and therefore no pre-installation data are available for analysis.

Based on the findings of the annual review, cameras which are not delivering the expected road safety benefits will be more comprehensively investigated. These comprehensive investigations may result in the removal and relocation of the camera.

The findings from the annual review also inform future speed enforcement operations, and address NRMA Motoring & Services' request for an assessment of all high infringing speed camera locations.

### 2.3 The speeding problem

Speeding, which encompasses excessive speed (driving above the speed limit) or inappropriate speed (driving too fast for the prevailing conditions), is unquestionably recognised as a major contributing factor in both the number and severity of crashes in NSW.

<sup>&</sup>lt;sup>5</sup> <u>https://www.audit.nsw.gov.au/ArticleDocuments/200/Improving\_Road\_Safety\_Media\_Release.pdf.aspx?Embed=Y</u>

<sup>&</sup>lt;sup>6</sup> For speed cameras operating in warning mode, warning letters are issued to motorists detected speeding, unless they exceed the speed limit by more than 30km/h, in which case a court attendance notice is issued and drivers face significant penalties. A three-strikes system also applies, where if a registered operator of a vehicle is issued two warning letters from the one warning mode camera, an infringement will be issued for a third offence and any further offences at that location.

Speeding increases the risk of having a crash, and increases the risk of death or serious injury in the event of a crash. Studies of survival and impact speed show that small increases in travel speed can result in large increases in braking distances and impact speed, resulting in both an increased risk of a crash and a more severe outcome. This is especially the case for crashes with less protected road users such as pedestrians and cyclists.

### 2.4 Safety benefits of camera enforcement

Speed camera enforcement is an important road safety initiative with proven road safety benefits, and is a commonly employed method of speed enforcement in many best practice road safety jurisdictions worldwide. Speed enforcement helps to reduce the incidences of speeding on our roads, which in turn reduces the risk of crashes and reduces the likelihood of death or serious injuries in the event of a crash.

Speed enforcement activities aim to reduce speeding by increasing the perceived likelihood of being caught and punished. Speed cameras generally tend to detect an initial high number of infringements followed by a rapid and sustained decrease in infringements as drivers modify their behaviour. This is also reflected by a reduction in crashes over that time.

Appendix A contains graphs of the infringement trends for individual NSW fixed speed camera locations.

### 2.5 Transparent management of NSW speed camera programs

### 2.5.1 Speed camera locations are available to drivers

All speed cameras in NSW are signposted and mobile speed camera vehicles are clearly marked.

The NSW Centre for Road Safety website (<u>http://roadsafety.transport.nsw.gov.au</u>) lists all speed camera locations in NSW, allowing members of the public to find the locations of all fixed, red-light and mobile speed cameras, and the positions of all point-to-point speed zones.

Members of the public are also able to nominate locations for speed cameras via the safer roads website (<u>www.saferroadsnsw.com.au</u>).

### 2.5.2 Speed camera revenue directly funds road safety initiatives

All fines from speed and red light cameras are paid into the Community Road Safety Fund. This funds road safety initiatives including engineering works, enhanced enforcement by the NSW Police Force, public education campaigns and community grants.

Speeding fines issued by police are not paid into the Community Road Safety Fund.

# **3** Types of speed camera programs in NSW

Speed cameras are automated speed enforcement tools that supplement enforcement conducted by the NSW Police Force.

The NSW Police Force routinely nominates locations to be considered for automated speed enforcement, as cameras can operate in locations that may be difficult for police to enforce. Members of the public are also able to nominate locations for speed cameras, via the NSW safer roads website at <u>www.saferroadsnsw.com.au</u>.

Table 1 shows the four types of speed cameras used in NSW.

	Speed cameras used in NSW				
Camera Type	Main purpose	Introduced	Program Size (as at 31 Dec 2016)		
Fixed speed cameras	Location specific, to address black spot / high risk locations	1997	138 cameras at 109 locations <sup>7</sup>		
Red-light speed cameras	Location specific, to address high risk intersections	2009	191 cameras at 171 intersections.		
Mobile speed cameras	General network deterrence	Re-introduced in 2010. (This program was first introduced in 1991, but ceased operation in Dec 2008)	640 locations, 7,000 hours of enforcement/month		
Average speed (Point- to-point) cameras	Route enforcement (for heavy vehicles only)	2010	25 lengths		

Table 1 <sup>.</sup>	Types of speed	d camera	enforcement i	n NSW
Tuble 1.	1 9 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	ounioru		111011

### 3.1 Fixed speed cameras

Fixed speed cameras are located at road lengths where there is a demonstrated crash history or a high crash risk. These cameras detect and deter speeding at a specific location on the road network.

### 3.2 Red-light speed cameras

Red-light speed cameras are installed at signalised intersections where drivers are vulnerable to right angle crashes and there is an elevated risk of a pedestrian crash. These cameras detect and deter both speeding and red-light running, both of which can result in severe injuries even in lower speed crashes.

<sup>&</sup>lt;sup>7</sup> Of the 109 fixed speed camera locations, seven locations operate in warning mode and five locations are high risk sites located in tunnels. Recommendations are not provided for these warning mode and high risk locations.

### 3.3 Mobile speed cameras

Mobile speed cameras are moved around the road network at various times and locations. This means drivers are less able to predict where enforcement will occur, and so are more likely to comply with the speed limit more often.

Mobile speed cameras are operated from highly visible vehicles. Enforcement is conducted by private contractors that are managed by Roads and Maritime Services. The prevailing speed limit is displayed on a warning sign so that motorists are aware of the speed limit and the mobile speed camera.

The benefit of mobile speed cameras in reducing speeding is not limited to mobile speed camera locations or the time the camera is located there; they produce a sustained change in driver behaviour by increasing the real and perceived likelihood that speeding can be enforced anywhere at any time.

### 3.4 Average speed (point-to-point) cameras

The NSW average speed (point-to-point) camera program addresses heavy vehicle speeding along travel routes with a demonstrated history of heavy vehicle crashes and/or speeding. The program targets heavy vehicles because they are over-represented in crashes on known heavy vehicle routes.

Average speed enforcement works by measuring the amount of time it takes a heavy vehicle to travel between points and then calculating the average speed of the vehicle. If the vehicle's average speed is faster than the speed limit for the length of road, the driver will be infringed for speeding.

# 4 Review Criteria for reviewing speed cameras

Speed cameras are used in NSW to reduce the number of people killed and injured in crashes.

The following sections outline the criteria that guide the review of speed camera performance in NSW.

### 4.1 Measuring the performance of speed camera programs

Program	Measure of Performance		
Fixed speed	Reduction in vehicles speeding at fixed speed camera locations		
camera program	Reduced frequency or severity of crashes at fixed speed camera locations		
Red-light speed	Reduction in frequency and severity of crashes at enforced intersections		
camera program	Reduction in frequency and severity of crashes at all signalised intersections (due to deterrent effect across the network)		
Mahila anad	Reduction in road trauma across the entire road network		
Mobile speed camera	Reduction in speed-related crashes across the entire road network		
program	Reduction in speeding across the entire road network		
Average speed (point-to-point)	Reduction in heavy vehicle speeding on point-to-point enforcement lengths		
camera program	Reduction in the frequency and severity of heavy vehicle crashes on point-to-point enforcement lengths		

Table 2: Criteria for measuring the performance of speed camera programs

Results for the above are presented in Section 8.

### 4.2 Measuring the performance of individual speed cameras

Camera Type Performance data		Measure of performance
	Speeds	Reduction in vehicles speeding within 500 metres of the camera
Fixed speed	Compliance data	Increase in compliance at camera location and/or reduction in infringement rates
cameras	Crash data	Reduction in casualties and crashes within 500 metres of the camera
	Risk	Reduction in risk at the location (for example low level of speeding and/or crashes in tunnels)
	Speeds	Reduction in vehicles exceeding speed limit at the intersection
Red-light speed cameras	Compliance data	Increase in compliance at the intersection and/or reduction in infringement rates
	Crash data	Reduction in casualties and crashes at intersection
	Annual speed surveys	Reduction in vehicles exceeding speed limit across the road network, by testing a random sample of locations
Mobile speed cameras	Compliance data	Increase in compliance rates and/or reduction in infringement rates
	Crash data	Reduction in crashes and casualties across NSW
	Speeds	Reduction in heavy vehicle speeding within enforcement lengths
Average speed (point-to-point) camera program	Compliance data	Increase in heavy vehicle compliance within the enforcement length and/or reduction in heavy vehicle infringement rates
	Crash data	Reduction in heavy vehicle crashes within enforcement lengths

Table 3: Criteria for measuring the performance of individual speed cameras

Results for the above are presented in Appendices A - D.

# 5 Data context

### 5.1 Road crash data

The crash statistics recorded by Transport for NSW in the CRS crash recording database, CrashLink, are confined to those crashes which conform to the national guidelines for reporting and classifying road vehicle crashes<sup>8</sup>, based on the following criteria:

- The crash was reported to the Police,
- The crash occurred on a road open to the public,
- The crash involved at least one moving road vehicle, and
- The crash involved at least one person being killed or injured or at least one motor vehicle being towed away.

The method of reporting tow away crash data changed in October 2014, and as such is no longer comparable to the before period. As a result, this review has focussed on casualty, fatal and serious injury crashes, compared to some of the reviews completed in previous years. This is further discussed in section 7.

### 5.2 Injury severity

Crash data is presented by severity of injury, and defined as follows:

- **Fatality**: a person who dies within thirty days from injuries received in a road traffic crash.
- Serious injury: a person identified in CrashLink (casualty or driver or rider) who is matched to a hospital admission record on the same day or on the day after a crash and did not die within 30 days of the crash, and is admitted with at least one injury diagnosis; or linked to an iCare (Lifetime Care) participant record.
- **Moderate injury**: a person identified in CrashLink (casualty or driver or rider) who is matched to an emergency department attendance record on the same day or on the day after a crash but was not killed or not subsequently admitted to hospital; or a previously defined Minor/Other or No Injury CrashLink record matched to a SIRA CTP record with a MAIS score of 2 (Moderate) or higher.
- **Minor / Other injury**: a person identified as an injury in CrashLink who is not matched to a hospital admission record or emergency department attendance record; or a previously defined No Injury CrashLink record matched to a SIRA CTP record with an MAIS score of 1 (Minor).
- **Injury Severity uncategorised**: a person identified as an injury in CrashLink prior to 2005 for which data linkage with health records is not available.
- **Casualty**: any person killed or injured because of a crash.
- Casualty crash: a crash that results in at least one person killed or injured.

<sup>&</sup>lt;sup>8</sup> More information about how crash data is processed in NSW is available online at <u>www.roadsafety.transport.nsw.gov.au</u>.

Crash data reported from 2005 onwards includes additional detail regarding injury severity, and are categorised as:

- Serious Injury,
- Moderate Injury,
- Minor / Other Injury.

Prior to 2005, crash data was not matched to hospital admissions or emergency department presentations, so all non-fatal injuries prior to 2005 were uncategorised with respect to the severity of injury.

### 5.2.1.1 Updated serious injury definition

In previous years, NSW defined a serious injury to be an injury from a crash which resulted in a hospital admission.

Under the current definition, a serious injury is defined as:

• A person matched to a hospital admission that identifies an injury,

or

• A person that has a SIRA icare (Lifetime Care) claim.

This has decreased the number of serious injuries per year due to the removal of hospital admissions for reasons other than injury.

In addition, further investigation and linkage of hospital data has improved the identification of serious injuries, and refreshed some data, as outlined below.

### 5.2.1.2 Inclusion of additional moderate injuries

The Centre for Road Safety has identified a number of people injured in crashes that did not report to police as having been injured at the time of the crash, but have subsequently made a claim for an injury. These records were identified within Compulsory Third Party (CTP) insurance claims.

Additional records of people injured in a crash were also identified within the NSW Government's emergency department presentation records.

As a result, a number of moderate injuries have been added into CrashLink for people that were previously recorded as not injured. This had the effect of increasing the numbers of moderate and minor injuries for years 2005 to 2013 (when compared to the totals reported in some previous years).

# 6 Data parameters

### 6.1 Five years of data

Typically, at least five years of data are required to make an assessment of a camera's performance.<sup>9</sup>

As some camera locations or lengths have been operational for less than five years, the data for these locations are insufficient to reliably assess performance. Preliminary observations have instead been provided for these locations.

### 6.2 Time periods analysed

Data for the period before the installation of the camera (the "before" period) has been compared against data after the camera's commencement date (the "after" period, when warning letters and then infringements are issued).

To assess the current performance of the speed camera, the most recent five calendar year period (i.e. 2012 - 2016) is selected as the "after" period.

### 6.2.1 **Pre-installation periods**

For fixed, red-light and average speed (point-to-point) camera programs, the five year "before" period ends three months prior to the "commencement date." This is to ensure that the "before" period does not capture the "pre-installation period" when behavioural changes may result from the presence of not-yet operational camera housing.

However, it should be noted that a significant portion of the red-light speed camera locations previously featured a wet-film red-light camera. (The wet-film red-light program preceded the red-light speed camera program). 82 of the 171 red-light speed camera locations previously featured a wet-film red-light camera.


Wet-film red-light cameras were operational for different periods of time, requiring there to be camera housing (poles and camera boxes) at the roadside at these locations. As a result, "before" data for a significant number of red-light speed cameras may have been impacted by drivers' perceptions that there was camera enforcement in place at these locations. It can be assumed that this would have improved drivers' compliance at these locations, compared to other sites where there were no camera housings in place.

### 6.2.2 Warning mode periods

Fixed and red-light speed cameras generally operate in warning mode for a onemonth period after the "commencement date". A one-month warning mode period also applied for mobile speed cameras when the program was introduced, but has not been applied since then.

NSW average speed (point-to-point) camera lengths generally operate in warning mode for a two-month period after the "commencement date".

<sup>&</sup>lt;sup>9</sup> Austroads (2009). Guide to Road Safety Part 8: Treatment of Crash Locations. Publication No. AGRS08/09.

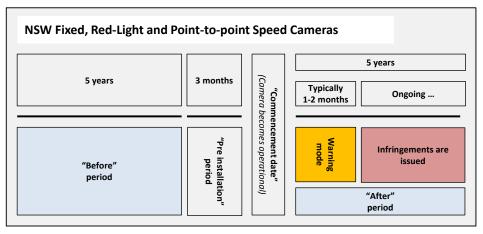

### Figure 1: Before, After and Warning Mode periods

### 6.3 Crashes selected for analysis

When reviewing fixed, red-light and point-to-point speed cameras, crash data were examined at individual speed camera locations.

When reviewing mobile speed cameras, crash data were examined for the entire state, due to the nature of mobile speed cameras and their purpose of creating a general deterrence effect across the NSW road network.

### 6.4 State-wide crash data

State-wide crash data is provided to compare the crash outcomes at fixed and redlight speed camera locations against the rates of change observed across NSW.

### 6.5 State-wide comparison traffic volume data

The Australian Bureau of Infrastructure, Transport and Regional Economics publishes the yearbook of Australian Infrastructure Statistics each year.<sup>10</sup>

NSW state-wide measures of vehicle kilometres travelled (VKT) as calculated for the yearbook are the basis of the state-wide vehicle volumes cited within this report.

### 6.6 State-wide speed survey data

Vehicle speeds were assessed state-wide via the CRS annual speed survey program.

In 2016, speed surveys for the CRS annual speed survey program were conducted at 175 NSW locations, including a range of roads with a range of speed limits, to gather current information about the speeding behaviour of both light vehicle drivers and heavy vehicle drivers.

The surveys measure free travel speeds, with a headway of four seconds. That is, only the speeds of vehicles that are unimpeded by other traffic are measured. Therefore the survey provides a measure of the speed that drivers choose to travel rather than a measure of traffic congestion.

<sup>&</sup>lt;sup>10</sup> Bureau of Infrastructure, Transport and Regional Economics (BITRE), 2017, *Yearbook 2017: Australian Infrastructure Statistics, Statistical Report*, BITRE, Canberra ACT.

Speed surveys are not undertaken at specific speed camera enforcement locations. Because of this, this report instead uses infringement data at camera locations as a proxy for speed data.

### 6.7 Infringement data

Infringement data analysed in this report include penalty notices from July 2002 onwards. No earlier infringement data are available.

All fines from speed cameras are directed to the Community Road Safety Fund to pay for road safety programs across the state. Infringement data for red-light speed cameras, fixed speed cameras and mobile speed cameras are publicly available through the Revenue NSW website (<u>http://www.revenue.nsw.gov.au/info/statistics</u>).

# 7 Review methodology

### 7.1 Fixed speed camera locations

### 7.1.1 Fixed speed cameras analysed

While at the end of 2016 there were 109 fixed speed camera locations across NSW, road safety benefits were only assessed in detail for 97 fixed speed camera locations within this report.

12 fixed speed camera locations were excluded, as follows:

- Seven locations are currently operating in warning mode.<sup>11</sup> This report includes information on crashes, warning letters and infringements at these locations within Appendix A (sections A4 & A5).
- Five locations are located in tunnels (and were sometimes referred to in the review as "high risk" locations). These cameras were generally installed when the tunnel was constructed, therefore no pre-installation data are available. Post installation crash and infringement data for these locations is presented at section A6.

The 97 fixed speed camera locations analysed in this report have been operational for the following periods:

NSW fixed speed cameras		
Operational for 5 years or more:	94 locations	
Operational for less than 5 years:	3 locations	
Total:	97 locations	

Table 4: Operational duration of NSW fixed speed cameras

### 7.1.2 Road length analysed for each camera

Crash data were typically examined within 500 metres either side of fixed speed cameras.

For fixed speed cameras located within a school zone, crash data were examined from patch-to-patch (i.e. the length of road designated as a school zone, as identified by the start and end 40km/h patches marked on the road).

For locations with more than one camera in operation (where cameras are less than 100 metres apart), the crash analysis length was for 500 metres either side of the mid-point of the two cameras.

One fixed speed camera location - the M1 Princes Motorway (formerly the F6, Southern Freeway) Gwynneville - had two cameras operating approximately 1,000 metres apart and infringing in different directions. Within this report, the two cameras were listed as separate locations for the directions they enforce.

<sup>&</sup>lt;sup>11</sup> For speed cameras operating in warning mode, warning letters are issued to motorists detected speeding, unless they exceed the speed limit by more than 30km/h, in which case a court attendance notice is issued and drivers face significant penalties.

A three-strikes system also applies, where if a registered operator of a vehicle is issued two warning letters from the one camera location, an infringement will be issued for a third offence and any further offences at that location.

#### 7.1.3 Recommendations

This report considered "before" and "after" crash analysis, and whether the fixed speed camera location has previously been comprehensively reviewed, to develop recommendations as follows:

Recommendation	Trigger	Outcome	
	Major roadworks have been undertaken at the location <u>or</u>	TfNSW will undertake a	
Review	There has been a statistically significant increase <sup>12</sup> in the number of casualty crashes, and the camera has not been reviewed in the last 5 years.	comprehensive review of the camera location.	
Retain and monitor	There has been an increase in the number of casualty crashes, but it is not a statistically significant result.	The camera will continue to be used at the location. The location will also be flagged for ongoing monitoring in future reviews.	
	There has been no increase in casualty crashes <u>or</u>	The camera will continue to be used at the location.	
Retain	There has been an increase in the number of casualty crashes, but it is not a statistically significant result, and the location has been reviewed within the last 5 years <u>or</u>		
	There has been a statistically significant increase <sup>13</sup> in the number of casualty crashes, but the location has been reviewed within the last 5 years.		
Insufficient data	There is less than 5 years of 'after' data available.	The camera will be assessed once 5 years of "after" data is available.	
Ineligible	There is a review currently underway at the location, <u>or</u>	TfNSW will complete the comprehensive review.	
	The camera has been removed.	Nil.	

 $<sup>^{12}</sup>$  A p-value of 0.05 has been applied to determine statistical significance  $^{13}$  A p-value of 0.05 has been applied to determine statistical significance

### 7.1.4 Comprehensive reviews

Where required, comprehensive reviews will be undertaken as per the process in previous years. Depending on the findings of each comprehensive review, the fixed speed camera may be removed, and road safety treatments implemented to address any identified road safety risks. These treatments may involve improved signage, road works, traffic facilities, speed zoning reviews and targeted communications.

The Centre for Road Safety is currently leading a program of 12 comprehensive speed camera reviews, at the following locations:

- Berry Princes Highway, between Kangaroo Valley Road and Victoria Street
- Foxground Princes Highway, between Foxground Road and Broughton Creek
- **Hungry Head** Giinagay Way (formerly the Pacific Highway), between Boundary Road and Ballards Road
- **Terrigal** Terrigal Drive, between Brunswick Road and Bellbird Avenue (*School Zone*)
- Valla Beach Giinagay Way (formerly the Pacific Highway), between Valla Beach Road and Oyster Creek
- Bomaderry Bolong Road, between Beinda Street and Coomea Street
- Brogo Princes Highway, between Pioneer Close and Brogo River
- Burringbar Tweed Valley Way, between Blakeneys Road and Cooradilla Road
- North Narrabeen Pittwater Road, between Garden Street and Namona Street (School Zone)
- Queanbeyan Lanyon Drive, between Tompsitt Drive and Hoover Road
- **Rydalmere** Victoria Road, between Park Road and John Road (School Zone)
- Hartley Great Western Highway, between Mid Hartley Road and Blackmans Creek

### 7.1.5 Additional technical notes

### Additional technical notes for the analysis of fixed speed cameras:

- 1. The commencement date listed for each location refers to the date that the fixed speed camera commenced infringement (or warning mode) at that location. For locations where more than one fixed speed camera is in operation, the date listed refers to the date that the *first camera* started infringing at that location, unless otherwise specified.
- For each location, the "before" and "after" periods vary depending on the date the camera commenced infringement, and exclude the three-month period directly before the commencement date.
   For each location, the "before" period was defined as the five-year period up to three months prior to the "commencement date" (when infringements commence). The "after" period was defined as the most recent five-year calendar period (2012 - 2016).
- 3. In instances when there was less than five years of "before" data, the "before" period was adjusted so that it represented an equivalent five-year period.

### Additional technical notes for the analysis of fixed speed cameras:

- 4. The percentage reduction for crashes and casualties are based on the annual averages in crashes and casualties at each location in the "before" period and the "after" period. This allows an approximate comparison to be made between the five-year "before" period and the most recent five calendar year "after" period (2012 2016).
- 5. The estimated casualty cost for the "before" period and the most recent five calendar year "after" period was calculated using the willingness to pay methodology, which reflects the accumulated value the NSW community is willing to pay or forgo in exchange for a reduction in the probability of crash related injuries and road crash deaths on NSW roads.

The casualty costs used were based on the costs for the weighted average of urban and non-urban fatal and injury reductions, as follows:

- \* \$7,272,032 per fatality,
- \* \$466,010 per serious injury,
- \* \$72,804 per moderate or minor/other injury, and
- \* \$203,823 per uncategorised injury.
- 6. For each fixed speed camera location, a test of significance of the observed change in casualty crashes was conducted using the conditional method.<sup>14</sup> This approach compared the number of casualty crashes in the "after" period with the conditional distribution of the casualty crashes in the "after" period given the total casualty crashes in both the "before" and "after" periods.
- 7. Data for the crash analysis have not been ranked and are presented alphabetically according to the location description of the camera location.

<sup>&</sup>lt;sup>14</sup> Przyborowski, J., Wilenski, H., 1940. Homogeneity of results in testing samples from Poisson series. *Biometrika 31*, 313–323.

### 7.2 Red-light speed camera locations

### 7.2.1 Red-light speed cameras analysed

At the end of 2016, there were 191 red-light speed cameras in total, operating at 171 intersections around Sydney, Newcastle and Wollongong. 19 intersections featured two or more cameras.

All red-light speed camera intersections were analysed in this report, and they have been operational for the following periods:

NSW fixed speed cameras		
Operational for 5 years or more:	91	
Operational for less than 5 years:	80	
Total:	171	

### 7.2.2 Road length analysed for each camera

Crash data were examined within 10 metres of each intersection with a red-light speed camera.

### 7.2.3 Analysis of specific crash types

In addition to total casualties at each location, pedestrian casualties were specifically examined given the greater exposure of pedestrians at signalised intersections and the higher likelihood of severe casualty outcomes for this group due to their lack of protection in a crash.

Data were also examined for adjacent, right-through and rear-end casualty crashes, as these are the crash types that typically occur at intersections. Adjacent and right-through crashes are often more severe as drivers and passengers are not as protected from side impact crashes, with low-speed side impact crashes potentially resulting in severe injuries. The frequency and severity of these crash types are expected to reduce at intersections enforced by red-light speed cameras.

Red-light speed cameras are intended to counteract the potential increase in rear-end crashes by also enforcing speed, as it is easier for drivers to brake in time to avoid a rear-end collision when they are driving at lower speeds.

### 7.2.4 Recommendations

This is the second year that sufficient data has been available to assess individual red-light speed camera locations.

This review considered "before" and "after" crash analysis to develop these recommendations. No red-light speed camera locations have previously been reviewed, so this was not a factor in developing recommendations.

Table 6 (overleaf) outlines the process for developing recommendations for red-light speed camera locations.

Recommendation	Trigger	Outcome
Review	There has been a statistically significant increase <sup>15</sup> in the number of fatal and serious injury crashes.	TfNSW will undertake a comprehensive review of the camera location.
Retain and monitor	There has been an increase in the number of fatal and serious injury crashes but it is not a statistically significant result.	The camera will continue to be used at the location. The location will also be flagged for ongoing monitoring in future reviews.
Retain	There has been no increase in fatal and serious injury crashes.	The camera will continue to be used at the location.
Insufficient data	There is less than 5 years of 'after' data available.	The camera will be assessed once 5 years of "after" data is available.

Table 6: Developing recommendations for red-light speed cameras

### 7.2.5 Additional technical notes

### Additional technical notes for the analysis of red-light speed cameras

- 1. To identify crashes at each intersection, CRS initially examined crashes geo-coded to be within 200 metres of the traffic signals. Crashes were then assigned to the enforced intersection if they occurred within, or up to 10 metres from, the intersection.
- 2. These crashes were attributed to the relevant intersection by taking into account the geo-coding as well as the street name, identifying feature(s), and intersection type.
- 3. Where unclear, the correct location of the crash was confirmed or inferred from the original police report.
- 4. The commencement of the warning letter period was listed for each camera. For the analysis of intersections with two cameras, the "after" period was based on the earlier of the two commencement dates.
- 5. Data for each crash type (adjacent, right- and rear-end) was reported based on Road User Movement (RUM) codes. RUM codes describe the first impact that occurred during the crash. Adjacent crashes are indicated by RUM code 10; Right-crashes are coded 21 and rear-end crashes are coded 30. More information on RUM codes can be found in the Definition and notes to support road crash data at http://roadsafety.transport.nsw.gov.au/downloads/definitions-notes.pdf
- 6. The improvement rates for crashes and casualties were based on the annual averages in crashes and casualties at each location before and after the cameras were installed. This allowed an approximate comparison to be made between the five year "before" period and the available data for the "after" period until December 2016 (which is less than five years for a number of red-light speed camera locations).

 $<sup>^{15}</sup>$  A p-value of 0.05 has been applied to determine statistical significance

### Additional technical notes for the analysis of red-light speed cameras

- 7. The estimated casualty cost for the "before" period and the most recent five calendar year "after" period was calculated using the willingness to pay methodology, which reflects the accumulated value the NSW community is willing to pay or forgo in exchange for a reduction in the probability of crash related injuries and road crash deaths on NSW roads. The casualty costs used were based on the costs for the urban fatal and injury reductions, as follows:
  - \* \$6,965,123 per fatality,
  - \* \$418,789 per serious injury,
  - \* \$64,437 per moderate or minor/other injury.
- 8. Crash data were not ranked and were presented alphabetically by suburb of the camera location.

### 7.3 Mobile speed camera locations

### 7.3.1 Road lengths analysed

The entire NSW road network was analysed to review the general deterrence effect of the mobile speed camera program.

### 7.3.2 Program structure and periods of enforcement

In December 2015, the NSW Government announced new higher-visibility mobile speed camera vehicle markings, and additional enhancements to warning signage. The mobile speed camera program operated for 7,000 enforcement hours per month at 640 locations.

### 7.4 Average speed enforcement lengths

### 7.4.1 Average speed enforcement lengths analysed

The average speed (point-to-point) camera program only targets heavy vehicles. The program includes 25 enforcement lengths ranging from 7 - 94km, and includes most major NSW highways. Enforcement lengths were installed over the following years:

Year	Lengths installed		
2010	2	(5 years of data	
2011	14	is available for these lengths)	
2012	4		
2013	1		
2014	3	(Less than 5 years of data is available for the lengths)	
2015	1		
2016	0		
Total:	25		

As for previous years, heavy vehicle crash and infringement data are presented to facilitate analysis of the current impact of individual point-to-point enforcement lengths.

# 8 Results and discussion

This review has found that speed cameras are continuing to improve road safety in NSW. Results from the fixed, red-light, mobile and average speed camera programs show that drivers are changing their behaviour, which overall is resulting in a reduction in crashes and casualties at camera locations and across the road network.

NSW' four speed camera programs are individually considered below.

### 8.1 Fixed speed cameras

Program size as at 31 December 2016: 138 cameras at 109 locations<sup>16</sup>

Median camera installation date: 29 April 2003

The analysis of individual fixed speed camera locations is available at Appendix A.

Overall, there has been a reduction in fatal crashes and injury crashes at fixed speed camera locations since the cameras were installed, compared with the five year period prior to installation.

Specifically, at fixed speed camera locations there has been a:

- 32 per cent reduction in casualty crashes
- 85 per cent reduction in fatalities
- 38 per cent reduction in injuries.

The reduction in fatalities and injuries represents a saving of \$546 million to the community.

The trauma reductions at camera locations compare to the following rates of change observed across NSW over the same period:

- 8 per cent reduction in casualty crashes
- 36 per cent reduction in fatalities
- 10 per cent reduction in injuries.

It should also be noted, alongside the crash data discussed above, that there has also been a notable increase in traffic volumes. Over the periods that fixed digital speed cameras have been reviewed within this report, there has been an 18 per cent increase in traffic volume across NSW.<sup>17</sup>

### 8.1.1 Individual fixed speed camera locations

Analysis within Appendix A has identified the following findings for individual camera locations:

<sup>&</sup>lt;sup>16</sup> Of the 109 fixed speed camera locations, seven locations operate in warning mode and five locations are high risk sites located in tunnels. Recommendations are not provided for these warning mode and high risk locations.

<sup>&</sup>lt;sup>17</sup> Estimates for Vehicle Kilometres Travelled (VKT) have been modelled by BITRE, primarily from data compiled by the Survey of Motor Vehicle Usage (ABS 2015).

(	Number of Cameras	
Insufficient data	A more comprehensive analysis over a longer time period is required before drawing any conclusions.	3
Ineligible	The camera has been removed or a review is currently underway	13
5 years of "after" data is available for the camera.	Retain	77
	Retain and monitor	4
	Review	0
	97	

### Table 7: Fixed speed camera locations status

The following table identifies fixed speed cameras with notable reductions in casualty crashes:

 Table 8: Top performing fixed speed cameras

Location	Casualty	crashes	Change in	% change	
Location	Before	After	cas crashes		
<b>New England Highway</b> , Tenterfield	6	0	↓6	↓ 100%	
<b>Pacific Highway</b> , Ewingsdale	14	1	↓13	↓ 92.9%	
Bunnerong Road, East Gardens/ Maroubra (school zone)	13	2	↓11	↓ 84.6%	
M1 Princes Motorway (formerly the F6, Southern Freeway), Gwynneville (northbound)	15	3	↓12	↓ 80%	
Henry Lawson Drive, Picnic Point	5	1	↓4	↓ 80%	

### 8.1.2 Fixed speed cameras identified to review / monitor

CRS has identified that while there are no locations with a statistically significant increase in casualty crashes, four locations recorded an increase (that was not statistically significant) and will be monitored in future years:

- Bonnyrigg Cabramatta Road, between Katinka Street and Tarlington
  Parade
- Bonnyrigg Elizabeth Drive, between Brown Road and Humphries Road
- Caringbah Captain Cook Drive, between Cawarra Road and Gannons Road
- **Gwynneville** M1 Princes Motorway, University Avenue Overpass and Mount Ousley Road (southbound)

This is the second year in a row that Bonnyrigg (Elizabeth Drive) and Gwynneville (southbound) have been identified for additional monitoring. While 90% of the crash data within the periods analysed for this 2017 Annual Review is common to those periods analysed for the 2016 Annual Review, additional analysis has been completed for both of these locations as outlined below.

	Pre-Installation						Post-Installation						
	Crashes at mid-block	Crashes on curves	Wet surface crashes	Head-on crashes	Run-off-road crashes	Single vehicle crashes		Crashes at mid-block	<b>Crashes on curves</b>	Wet surface crashes	Head-on crashes	Run-off-road crashes	Single vehicle crashes
Bonnyrigg	16	2	11	1	8	8		4	2	2	0	1	2
Gwynneville	7	4	3	0	2	2		10	2	2	0	1	2
	23	6	14	1	10	10		14	4	4	0	2	4
Percentage change:						-	↓ 39%	↓ 33%	↓ 71%	↓ 100%	↓ 80%	↓ 60%	

Table 9: Key crash data for identified fixed speed cameras

### 8.1.2.1 Bonnyrigg (Elizabeth Drive)

Casualty crashes at the Bonnyrigg (Elizabeth Drive) fixed digital speed camera location rose from 12 in the five years prior to installation of the camera, to 18 in the most recent five years (to the end of 2016). This is not a statistically significant outcome.

However, despite the rise in the overall number of casualty crashes, the crash types likely to be improved by the presence of a fixed speed camera have markedly improved or remained constant over these periods. Speeding has also fallen by approximately 68 per cent at this location.

These outcomes represent a substantial road safety gain – particularly considering that vehicle volumes have risen by an estimated 19 per cent at this location since the camera was installed in the year 2000.

### 8.1.2.2 Gwynneville (southbound)

Casualty crashes at the Gwynneville (Southbound) fixed digital speed camera location rose from 3 in the five years prior to installation of the camera, to 4 in the most recent five years (to the end of 2016). This is not a statistically significant outcome.

However, despite the rise in the overall number of casualty crashes, almost all of the crash types most likely to be improved by the presence of a fixed speed camera have either improved or remained constant over these periods. Speeding has also fallen by approximately 97 per cent at this location.

These outcomes represent a substantial road safety gain – particularly considering that vehicle volumes have risen by an estimated 25 per cent at this location since the camera was installed in 2003.

Considering the total data at both of these locations, substantial improvements have been observed for the crash types likely to be improved by the presence of a fixed speed camera. Speeding has also fallen by approximately 92 per cent.

### 8.2 Red-light speed cameras

Program size as at 31 December 2016: 191 cameras at 171 intersections Median camera installation date: 27 June 2011

The analysis of red-light speed camera locations is available at Appendix B.

Overall, there has been a reduction in fatal crashes and injury crashes at red-light speed camera locations since the cameras were installed, compared with the five year period prior to installation.

Specifically, at red-light speed camera locations there has been a:

- 33 per cent reduction in fatal and serious injury crashes
- 54 per cent reduction in fatalities
- 35 per cent reduction in serious injuries
- 49 per cent reduction in pedestrian casualties.

The reduction in fatalities and serious injuries represents a saving of \$124 million to the community.

The trauma reductions at camera locations compare to the following rates of change observed across NSW over the same period:

- 2 per cent increase in fatal and serious injury crashes
- 18 per cent reduction in fatalities
- 2 per cent increase in serious injuries
- 24 per cent reduction in pedestrian casualties.

It should also be noted, alongside the crash data discussed above, that there has also been a notable increase in traffic volumes. Over the period that red-light speed cameras have been reviewed within this report, there has been a 9 per cent increase in traffic volume across NSW.<sup>18</sup>

### 8.2.1 Individual red-light speed camera locations

Analysis within Appendix B identifies the following findings for individual camera locations:

<sup>&</sup>lt;sup>18</sup> Estimates for Vehicle Kilometres Travelled (VKT) have been modelled by BITRE, primarily from data compiled by the Survey of Motor Vehicle Usage (ABS 2015b).

С	Number of Fixed Speed Cameras	
Insufficient data	A more comprehensive analysis over a longer time period is required before drawing any further conclusions.	80
5 years of "after" data is available for the	Retain	69
	Retain and monitor	21
camera.	Review	1
	171	

### Table 10: Red-light speed camera location status

The following table identifies red-light speed cameras with notable reductions in fatal / serious injury crashes:

Location		Serious trashes	Change in FSI crashes	% change	
	Before	After	T OF CRUSHES		
<b>Bondi Junction</b> - Old South Head Road at Bondi Road	8	0	↓8	↓ 100%	
Surry Hills - Cleveland Street at South Dowling St	11 2		↓ 9	↓81.8%	
<b>Strathfield</b> - Arthur Street at Centenary Drive	10	2	↓ 8	↓80%	
Moore Park / Paddington - Anzac Parade / Flinders Street at Moore Park Road	10	3	↓7	↓70%	
Darlinghurst - Craigend Street at McLachlan Avenue	12	6	↓6	↓ 50%	

Table 11: Top performing red-light speed cameras

### 8.2.2 Red-light speed cameras identified to review / monitor

A statistically significant increase in fatal and serious injury crashes was identified at one red-light speed camera location: Moore Park, Anzac Parade at Lang Road.

Fatal and serious injury crashes rose from one in the five years prior to installation of this camera, to eight in the most recent five years (to the end of 2016). However, the road environment has changed substantially at this location over recent years. The Centre for Road Safety will work with Roads and Maritime Services and other stakeholders to undertake a comprehensive speed camera review at this location.

21 other locations also recorded an increase in fatal and serious injury crashes – but that was not a statistically significant result. These locations will be monitored in future years:

- Bexley: Forest Road at Harrow • Road
- **Campsie:** Canterbury Road at **Bexley Road**
- Canley Vale: Sackville Street at Canley Vale Road
- **Castle Hill:** Showground Road at Victoria Avenue
- Five Dock: Fairlight Street at Ramsay Road
- Hamilton: Tudor Street at Beaumont Street
- Kensington: Anzac Parade at Todman Avenue
- Kogarah Bay: Park Road at Princes Highway
- Marrickville: Sydenham Road at • Victoria Road

- Mayfield West: Pacific Highway at Maud Street
- Milperra: Newbridge Road at Henry Lawson Drive
- Mosman: Military Road at Cowles Road
- North Ryde: Wicks Road at Epping Road •
- **Petersham:** Gordon Street at New Canterbury Road
- Petersham: Parramatta Road at West Street •
- Ryde: Victoria Road at Devlin Street
- Smithfield: Victoria Street at Hassall Street •
- South Penrith: Parker Street at Jamison Road
- South Wentworthville: Cumberland Highway • at Old Prospect Road
- Thornleigh: Pennant Hills Road at Parkes Street
- Wollongong: Gladstone Avenue at Princes • Highway

This is the second year in a row that eight of the above locations have been identified for additional monitoring. While 90% of the crash data within the periods analysed for this 2017 Annual Review is common to those periods analysed for the 2016 Annual Review, additional analysis has been completed for these locations as outlined below.

	Pre-Installation						Post-Ins	tallation	
	Pedestrian casualties	Adjacent casualty crashes	Right through casualty crashes	Rear end casualty crashes		Pedestrian casualties	Adjacent casualty crashes	Right through casualty crashes	Rear end casualty crashes
Campsie	1	2	6	3		3	1	2	3
Milperra	1	1	3	8		0	2	1	15
Mosman	1	2	1	5		1	1	0	0
North Ryde	0	1	0	9		0	1	1	10
Petersham (Gordon St)	1	2	3	2		3	2	0	3
Petersham (Parramatta Rd)	1	3	6	6		0	2	5	1
Smithfield	0	3	5	1		0	3	3	2
South Penrith	1	2	7	3		0	0	4	3
	6	16	31	37		7	12	16	37
			Percentag	e change:		↑ <b>17%</b>	↓ 25%	↓ <b>48%</b>	Nil.

Table 12: Key crash data for identified red-light speed cameras

#### 8.2.2.1 **Campsie (Canterbury Road)**

There has only been a very small increase in fatal and serious injury crashes at this location, from 4 such crashes in the five years prior to the installation of the camera to 5 such crashes in the most recent five calendar years to the end of 2016. This is not a statistically significant outcome.

However, despite the rise in the overall number of casualty crashes, the majority of crash types likely to be improved by the presence of a red-light speed camera have

April 2018 | Version: 0.6

improved over these periods. Red-light running and speeding have also fallen by approximately 40 per cent and 90 per cent at this location.

These outcomes represent a substantial road safety gain, particularly considering that traffic volumes have grown by an estimated 9 per cent at this location since the camera was installed in 2010.

### 8.2.2.2 Milperra (Newbridge Road)

Fatal and serious injury crashes have increased from 1 such crash in the five years prior to the installation of the camera, to 5 such crashes in the most recent five calendar years to the end of 2016. This is not a statistically significant outcome.

Two of crash types likely to be improved by the presence of a red-light speed camera (pedestrian casualties and right through crashes) have improved at this location, while two others (adjacent and rear-end casualty crashes) have worsened. Red-light running and speeding have also fallen by approximately 86 per cent and 99 per cent at this location.

Overall, these outcomes represent a substantial road safety gain, particularly considering that traffic volumes have grown by an estimated 12 per cent at this location since the camera was installed in 2010.

### 8.2.2.3 Mosman (Military Road)

There has only been a very small increase in fatal and serious injury crashes at this location, from 1 such crash in the five years prior to the installation of the camera to 2 such crashes in the most recent five calendar years to the end of 2016. This is not a statistically significant outcome.

However, despite the rise in the overall number of casualty crashes, the crash types likely to be improved by the presence of a red-light speed camera have improved. Red-light running and speeding have also fallen by approximately 38 per cent and 57 per cent at this location.

These outcomes represent a substantial road safety gain – although it is estimated that traffic volumes have fallen by an estimated 1 per cent at this location since the camera was installed in 2010.

### 8.2.2.4 North Ryde (Wicks Road)

Fatal and serious injury crashes have increased from 1 such crash in the five years prior to the installation of the camera, to 6 such crashes in the most recent five calendar years to the end of 2016. This is not a statistically significant outcome.

Two of crash types likely to be improved by the presence of a red-light speed camera (pedestrian casualties and adjacent casualty crashes) have improved at this location, while two others (right through and rear-end casualty crashes) have worsened. While red-light running has remained constant, speeding has fallen by approximately 50 per cent at this location.

Overall, these outcomes represent a road safety gain, particularly considering that traffic volumes have grown by an estimated 13 per cent at this location since the camera was installed in 2010.

### 8.2.2.5 Petersham (Gordon Street)

There has only been a very small increase in fatal and serious injury crashes at this location, from zero such crashes in the five years prior to the installation of the camera to 1 such crash in the most recent five calendar years to the end of 2016. This is not a statistically significant outcome.

Two of crash types likely to be improved by the presence of a red-light speed camera (adjacent and right-through casualty crashes) have improved at this location, while two others (pedestrian casualties and rear end casualty crashes) have worsened. Red-light running has also fallen by approximately 60 per cent at this location, but speeding cannot be enforced at this location for technical reasons.

Overall, these outcomes represent a substantial road safety gain, particularly considering that traffic volumes have grown by an estimated 8 per cent at this location since the camera was installed in 2010.

### 8.2.2.6 Petersham (Parramatta Road)

There has only been a very small increase in fatal and serious injury crashes at this location, from 1 such crash in the five years prior to the installation of the camera to 2 such crashes in the most recent five calendar years to the end of 2016. This is not a statistically significant outcome.

However, despite the rise in the overall number of casualty crashes, the crash types likely to be improved by the presence of a red-light speed camera have improved. Red-light running and speeding have also fallen by approximately 60 per cent and 93 per cent at this location.

These outcomes represent a substantial road safety gain – although it is estimated that traffic volumes have fallen by an estimated 2 per cent at this location since the camera was installed in 2010.

### 8.2.2.7 Smithfield (Victoria Street)

There has only been a very small increase in fatal and serious injury crashes at this location, from 2 such crashes in the five years prior to the installation of the camera to 3 such crashes in the most recent five calendar years to the end of 2016. This is not a statistically significant outcome.

However, despite the rise in the overall number of casualty crashes, the majority of crash types likely to be improved by the presence of a red-light speed camera have improved over these periods. Red-light running and speeding have also fallen by approximately 67 per cent and 75 per cent at this location.

These outcomes represent a substantial road safety gain – although it is estimated that traffic volumes have fallen by an estimated 4 per cent at this location since the camera was installed in 2010.

### 8.2.2.8 South Penrith (Parker Street)

There has only been a very small increase in fatal and serious injury crashes at this location, from 1 such crash in the five years prior to the installation of the camera to 2 such crashes in the most recent five calendar years to the end of 2016. This is not a statistically significant outcome.

However, despite the rise in the overall number of casualty crashes, the crash types likely to be improved by the presence of a red-light speed camera have improved. Red-light running and speeding have also fallen by approximately 50 per cent and 75 per cent at this location.

These outcomes represent a substantial road safety gain, particularly considering that traffic volumes have grown by an estimated 12 per cent at this location since the camera was installed in 2010.

Considering the total data at these eight identified locations, substantial improvements have been observed for adjacent and right through casualty crashes.

The total number of pedestrian casualties has risen from 6 to 7, while rear-end casualty crashes have remained flat. Red-light running and speeding have fallen by approximately 58 per cent and 90 per cent.

### 8.3 Mobile speed cameras

The analysis of the mobile speed camera program is available at Appendix C.

There were 380 fatalities on NSW roads in 2016. While this was an increase on the 2015 figure (350), it remains significantly below the 2009 figure of 453 (prior to the reintroduction of the mobile speed camera program in 2010).

The NSW fatality rate per 100,000 population was 4.9 in 2016. While this is a small increase on the 2015 figure (4.6), it remains significantly below the 2009 figure of 6.42.

Annual speed survey data indicate that the mobile speed camera program continues to deliver road safety benefits, compared to results prior to the reintroduction of the mobile speed camera program.

### 8.3.1 Light vehicles

NSW speed survey data for the last eight years shows a reduced proportion of light vehicles exceeding the speed limit, across all speed zones.

Comparing the 2016 speed survey results against those from 2015, there is also a decreased proportion of light vehicles exceeding the speed limit, for most speed zones measured.

### 8.3.2 Heavy vehicles

The speed survey results also indicate that there has been a decrease in the proportion of heavy vehicles exceeding the speed limit over the last eight years; but while this is true for most speed zones, it is not the case for exceeding the speed limit by 10km/h or more in 100km/h zones.

Comparing the 2016 results against the 2015 results, there is an increased proportion of heavy vehicles exceeding the speed limit for approximately one third the speed zones measured.

### 8.3.3 Infringements

In 2016 there were a total of 29,339 infringements issued from mobile speed camera enforcement resulting in \$6.05 million of fines. The cost of conducting the mobile speed camera program in 2016 was \$21.1 million.

The total number of mobile speed camera infringements issued in 2016 decreased by 40 per cent compared to 2015.

### 8.3.4 Vehicle compliance rate

In 2016 the compliance rate was 99.9%. This high rate of compliance has remained consistent since 2010 when the program was reintroduced.

Overall, the trend in road fatalities, infringements and annual speed survey data demonstrates that the mobile speed camera program has delivered road safety benefits over the years since the program was re-introduced in 2010.

### 8.4 Average speed (point-to-point) cameras

The analysis of the average speed camera program is available at Appendix D.

### 8.4.1 Crash Data

Overall, there has been a reduction in fatal crashes and serious injury crashes on NSW heavy vehicle average speed enforcement lengths since those lengths were installed, compared with the five year period prior to installation.

Across heavy vehicle average speed camera lengths, there has been a:

- 12 per cent reduction in casualty crashes involving a heavy vehicle
- 19 per cent reduction in fatalities from crashes involving heavy vehicles
- 8 per cent reduction in serious injuries from crashes involving heavy vehicles.

The reduction in fatalities and serious injuries represents a saving of \$61 million to the community.

It should also be noted, alongside the crash data discussed above, that there has also been a notable increase in heavy vehicle traffic volumes. Over the period that heavy vehicle average speed enforcement lengths have been reviewed within this report, there has been a 9 per cent increase in heavy vehicle volume across NSW.<sup>19</sup>

### 8.4.2 Infringement Data

A total of 2,817 speeding infringements, resulting in total fines of \$1.3 million, were issued at NSW average speed camera lengths in 2016.

Overall, there has been a reduction in fatal crashes and serious injury crashes on NSW heavy vehicle average speed enforcement lengths since those lengths were installed, compared with the five year period prior to installation.

This represents a particularly notable road safety improvement when compared to NSW heavy vehicle volumes, which have risen 9 per cent over the same period.<sup>20</sup>

No average speed camera lengths were identified for further review or removal. CRS will continue to monitor the heavy vehicle average speed enforcement program.

<sup>&</sup>lt;sup>19</sup> Estimates for Vehicle Kilometres Travelled (VKT) have been modelled by BITRE, primarily from data compiled by the Survey of Motor Vehicle Usage (ABS 2015).

<sup>&</sup>lt;sup>20</sup> Estimates for Vehicle Kilomoeters Travelled (VKT) have been modelled by BITRE, primarily from data compiled by the Survey of Motor Vehicle Usage (ABS 2015)