



Traffic Switch on Showground and Carrington Roads, Castle Hill from 27 July 2022

July 2022

The Australian Government and NSW Governments are taking action to improve the reliability and efficiency of bus services, while easing congestion and improving safety for all road users.

Transport for NSW is upgrading the intersections of Showground Road at Carrington Road and De Clambe Drive and widening Showground Road and Carrington Road to provide extra turning lanes and bus lanes.


As part of this work traffic will be moved to the new alignment.

Preparation work for this will start Sunday 24 July with the relocation/removal of barriers, removal of temporary work signage and line marking.

Traffic will travel on the new alignment from Wednesday 27 July.

This arrangement includes:

- additional eastbound right hand turn lane into Carrington from Showground Road (1)
- new dedicated westbound left turn lane (buses excepted) into Carrington Road from Showground Road (2)
- new dedicated northbound left turn slip lane with signalized pedestrian crossing from Carrington to Showground with two dedicated right turn lanes (3)
- additional lanes on Carrington Road between Andalusian Way and Showground Road: two lanes for northbound and southbound (4)
- additional westbound bus lane along Showground Road 60m either side of De Clambe Drive (5)
- two lanes eastbound and westbound will be maintained on Showground Road
- pedestrian walkways will be fully open.

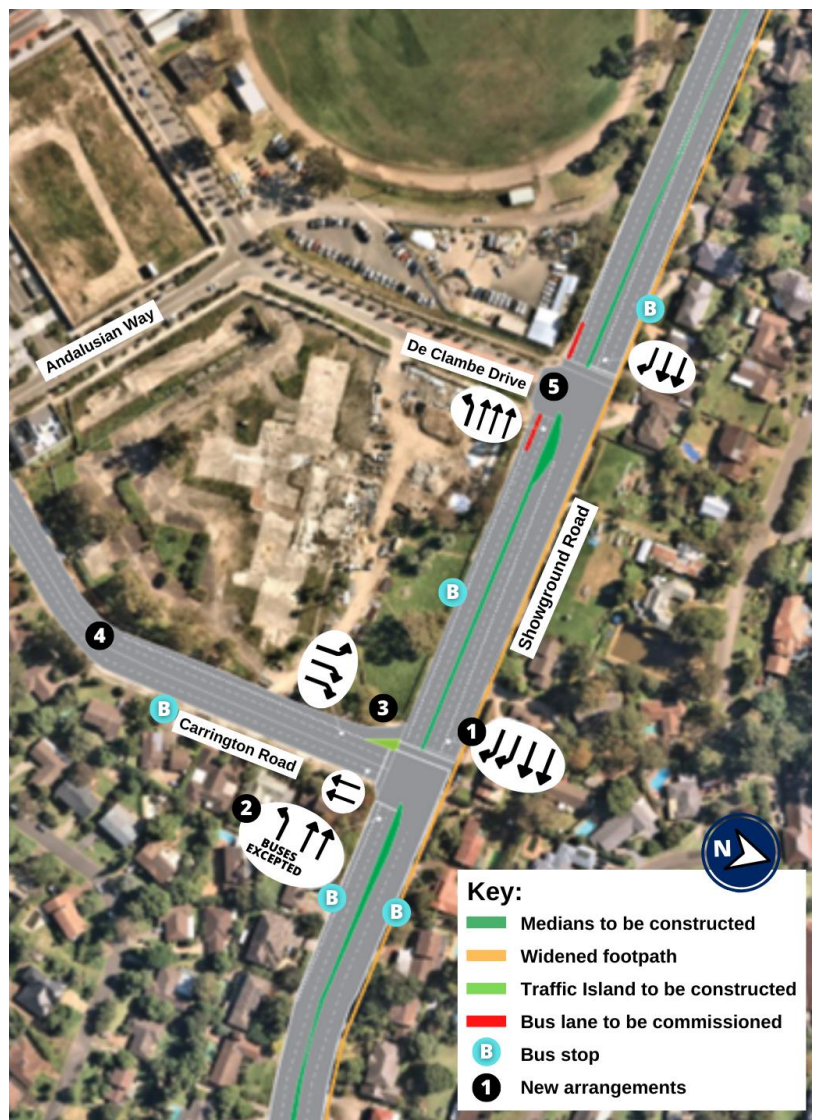

Our work schedule

Our team will be on site for 35 day and 28 night shifts between **Sunday 24 July 2022** and **Wednesday 31 August 2022**, weather permitting.

We have scheduled the work to be completed as efficiently as possible, limiting the disturbance on road users and the local community.

Our work hours will be between 7am and 6pm from Monday to Friday and between 8am and 1pm on Saturday.

Night work will be carried out between **8pm** and **5am** the next day from Sunday to Thursday. We will work up to five nights per week.

How will the work affect you?

Where possible, our work will be carried out during the day. However, we will need to carry out some work at night to lessen the disruption to traffic and for the safety of our workers.

Pedestrian access will be reinstated on both sides of Showground Road and Carrington Road.

Our work may be noisy at times, but we will do everything we can to reduce the disturbance, including completing noisier activities by midnight.

Traffic changes

There will be temporary traffic changes during our work hours for the widening works and for the work zone to be safe. Please keep to speed limits and follow signs and traffic controllers' directions.

For the latest traffic updates, you can call 132 701, visit livetraffic.com or download the Live Traffic NSW App.

Our progress

95%
complete

32 driveways have been completed

90%
complete

670 metres of new stormwater pipes have been installed

80%
complete

800 metres of shared path have been completed

70%
complete

1100 metres of kerb and gutter have been built

Contact us

If you have any questions, please contact our delivery partner, BMD Constructions on:



1800 861 855



showgroundcarrington@bmd.com.au



nswroads.work/Showgroundcarrington



If you need help understanding this information, please contact the Translating and Interpreting Service on **131 450** and ask them to call us on **1800 861 855**.